

# Upgrade

Date published: 2020-04-30

Date modified:

# CLOUDERA

# Legal Notice

© Cloudera Inc. 2024. All rights reserved.

The documentation is and contains Cloudera proprietary information protected by copyright and other intellectual property rights. No license under copyright or any other intellectual property right is granted herein.

Unless otherwise noted, scripts and sample code are licensed under the Apache License, Version 2.0.

Copyright information for Cloudera software may be found within the documentation accompanying each component in a particular release.

Cloudera software includes software from various open source or other third party projects, and may be released under the Apache Software License 2.0 (“ASLv2”), the Affero General Public License version 3 (AGPLv3), or other license terms. Other software included may be released under the terms of alternative open source licenses. Please review the license and notice files accompanying the software for additional licensing information.

Please visit the Cloudera software product page for more information on Cloudera software. For more information on Cloudera support services, please visit either the Support or Sales page. Feel free to contact us directly to discuss your specific needs.

Cloudera reserves the right to change any products at any time, and without notice. Cloudera assumes no responsibility nor liability arising from the use of products, except as expressly agreed to in writing by Cloudera.

Cloudera, Cloudera Altus, HUE, Impala, Cloudera Impala, and other Cloudera marks are registered or unregistered trademarks in the United States and other countries. All other trademarks are the property of their respective owners.


Disclaimer: EXCEPT AS EXPRESSLY PROVIDED IN A WRITTEN AGREEMENT WITH CLOUDERA, CLOUDERA DOES NOT MAKE NOR GIVE ANY REPRESENTATION, WARRANTY, NOR COVENANT OF ANY KIND, WHETHER EXPRESS OR IMPLIED, IN CONNECTION WITH CLOUDERA TECHNOLOGY OR RELATED SUPPORT PROVIDED IN CONNECTION THEREWITH. CLOUDERA DOES NOT WARRANT THAT CLOUDERA PRODUCTS NOR SOFTWARE WILL OPERATE UNINTERRUPTED NOR THAT IT WILL BE FREE FROM DEFECTS NOR ERRORS, THAT IT WILL PROTECT YOUR DATA FROM LOSS, CORRUPTION NOR UNAVAILABILITY, NOR THAT IT WILL MEET ALL OF CUSTOMER’S BUSINESS REQUIREMENTS. WITHOUT LIMITING THE FOREGOING, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, CLOUDERA EXPRESSLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, QUALITY, NON-INFRINGEMENT, TITLE, AND FITNESS FOR A PARTICULAR PURPOSE AND ANY REPRESENTATION, WARRANTY, OR COVENANT BASED ON COURSE OF DEALING OR USAGE IN TRADE.

# Contents

<b>Quick Start for Upgrading CSA.....</b>	<b>4</b>
<b>Creating new Flink application versions.....</b>	<b>4</b>
<b>Stopping Flink applications.....</b>	<b>4</b>
<b>Upgrading CSA artifacts.....</b>	<b>5</b>
<b>Resuming Flink applications.....</b>	<b>5</b>

## Quick Start for Upgrading CSA

You can use the Quick Start to easily upgrade Cloudera Streaming Analytics (CSA) to the latest version. You can learn more information by clicking on the high level steps covered in the illustration.

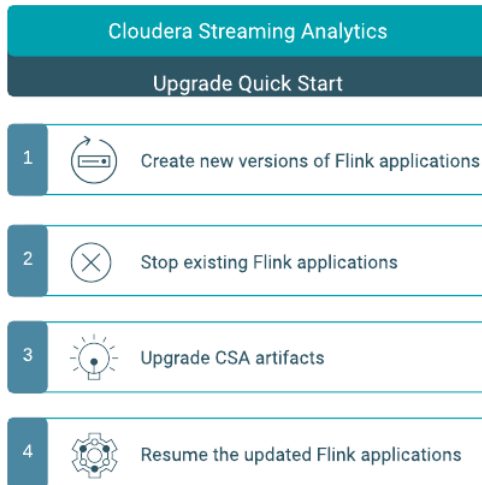

rect 42, 139, 440, 196 <https://docs.cloudera.com/csa/1.2.0/upgrade/topics/csa-create-new-version.html>

rect 42, 224, 441, 282 <https://docs.cloudera.com/csa/1.2.0/upgrade/topics/csa-stop-applications.html>

rect 42, 303, 440, 362 <https://docs.cloudera.com/csa/1.2.0/upgrade/topics/csa-upgrade-artifacts.html>

rect 42, 384, 441, 442 <https://docs.cloudera.com/csa/1.2.0/upgrade/topics/csa-resume-application.html>

## Creating new Flink application versions

You need to build new versions of your existing Flink applications by updating the Cloudera Streaming Analytics (CSA) dependencies to the latest version.

You need to verify that your new application versions are compatible with the planned CSA release. For example, if you build your project with Maven, you need to increment your version number in the pom.xml.

Old version: `<flink.version>x.x.x-csax.x.x.x</flink.version>`

New version: `<flink.version>y.y.y-csay.y.y.y</flink.version>`

## Stopping Flink applications

You must stop your Flink applications before updating the artifacts. You can use the stop command to create a savepoint of your application. You can also use the cancel command to stop your Flink application without creating a savepoint.

### About this task

You can use savepoints to resume the application state after the upgrade.

**Procedure**

1. Find the YARN application IDs.

```
yarn application -list -appTypes "Apache Flink"
```

2. Determine the related Flink job IDs.

```
flink list -yid <YARN application ID>
```

3. Stop your Flink applications.

You have two choices:

- Stop your applications with a savepoint to store the application state.

```
flink stop -yid <YARN application ID> <Flink job ID>
```

The command returns an HDFS path, which is the automatically created savepoint that stores the application state.

- Cancel your applications without creating a savepoint.

```
flink cancel -yid <YARN application ID> <Flink job ID>
```

Use this method if you do not need to restore the application state after the upgrade.

## Upgrading CSA artifacts

You need to upgrade the Cloudera Streaming Analytics (CSA) artifacts to the newer version by manually deleting the old CSD file from the repository, and adding the latest CSD file to the same location.

**Procedure**

1. Download the new CSD and parcel files from [Cloudera Downloads Portal](#).
2. Delete the old CSD version from /opt/cloudera/csd.
3. Copy the new artifacts to the /opt/cloudera/csd folder.
4. Ensure that you maintain the appropriate file ownership and access the attributes if needed.
5. Restart the Cloudera Manager Server with the following command:
  - RHEL 7 Compatible, SLES 12, Ubuntu: `systemctl restart cloudera-scm-server`
  - RHEL 6 Compatible: `service cloudera-scm-server restart`
6. Restart the Cloudera Management Services.
7. Install and activate the new CSA parcel from Cloudera Manager.
8. Restart the Flink service when prompted in the wizard.

For more information about the general process of Service Management, see the [Cloudera Manager documentation](#).

## Resuming Flink applications

After updating the Cloudera Streaming Analytics artifacts, you can resume your application by the Flink run command. In case you have stopped your application by creating a savepoint, you must add the savepoint location to the command.

If you had stopped your Flink applications with a savepoint, you must define the path to the savepoint with an additional `-s <savepointPath>` parameter to the original run command.

```
flink run -d -ynm YarnApplicationName -s <savepointPath> application.jar
```

To start your stateless applications or stateful applications with an empty application state, use the original Flink run command.

**Important:**

Additional TLS related properties were added to the Gateway role. If you previously enabled TLS on your cluster, you can define Gateway TLS/SSL Client Trust Store File and Gateway TLS/SSL Client Trust Store Password configurations. You can set `{{CM_AUTO_TLS}}` as the property values when using Auto TLS in Cloudera Manager.

Gateway TLS/SSL Client Trust Store File

security.ssl.rest.truststore

Gateway Default Group ↩

{{CM\_AUTO\_TLS}}

Gateway TLS/SSL Client Trust Store Password

security.ssl.rest.truststore-password

Gateway Default Group ↩

\*\*\*\*\*

You can verify your settings by running the `flink list -yD security.ssl.rest.enabled=true` command.

**Related Information**

[Running a Flink job](#)