

Operational Database powered by Apache Accumulo 1.0.0

Installing OpDB powered by Apache Accumulo

Date published: 2021-03-03

Date modified: 2024-01-08

CLOUDERA

<https://docs.cloudera.com/>

Legal Notice

© Cloudera Inc. 2024. All rights reserved.

The documentation is and contains Cloudera proprietary information protected by copyright and other intellectual property rights. No license under copyright or any other intellectual property right is granted herein.

Unless otherwise noted, scripts and sample code are licensed under the Apache License, Version 2.0.

Copyright information for Cloudera software may be found within the documentation accompanying each component in a particular release.

Cloudera software includes software from various open source or other third party projects, and may be released under the Apache Software License 2.0 (“ASLv2”), the Affero General Public License version 3 (AGPLv3), or other license terms. Other software included may be released under the terms of alternative open source licenses. Please review the license and notice files accompanying the software for additional licensing information.

Please visit the Cloudera software product page for more information on Cloudera software. For more information on Cloudera support services, please visit either the Support or Sales page. Feel free to contact us directly to discuss your specific needs.

Cloudera reserves the right to change any products at any time, and without notice. Cloudera assumes no responsibility nor liability arising from the use of products, except as expressly agreed to in writing by Cloudera.

Cloudera, Cloudera Altus, HUE, Impala, Cloudera Impala, and other Cloudera marks are registered or unregistered trademarks in the United States and other countries. All other trademarks are the property of their respective owners.

Disclaimer: EXCEPT AS EXPRESSLY PROVIDED IN A WRITTEN AGREEMENT WITH CLOUDERA, CLOUDERA DOES NOT MAKE NOR GIVE ANY REPRESENTATION, WARRANTY, NOR COVENANT OF ANY KIND, WHETHER EXPRESS OR IMPLIED, IN CONNECTION WITH CLOUDERA TECHNOLOGY OR RELATED SUPPORT PROVIDED IN CONNECTION THEREWITH. CLOUDERA DOES NOT WARRANT THAT CLOUDERA PRODUCTS NOR SOFTWARE WILL OPERATE UNINTERRUPTED NOR THAT IT WILL BE FREE FROM DEFECTS NOR ERRORS, THAT IT WILL PROTECT YOUR DATA FROM LOSS, CORRUPTION NOR UNAVAILABILITY, NOR THAT IT WILL MEET ALL OF CUSTOMER’S BUSINESS REQUIREMENTS. WITHOUT LIMITING THE FOREGOING, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, CLOUDERA EXPRESSLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, QUALITY, NON-INFRINGEMENT, TITLE, AND FITNESS FOR A PARTICULAR PURPOSE AND ANY REPRESENTATION, WARRANTY, OR COVENANT BASED ON COURSE OF DEALING OR USAGE IN TRADE.

Contents

- Installing Accumulo Parcel 1.0.0..... 4**
 - Install Operational Database powered by Apache Accumulo..... 4
 - Install Operational Database powered by Apache Accumulo CSD file..... 4
 - Install CDP.....4
 - Install Operational Database powered by Apache Accumulo parcel.....5
 - Add Accumulo on CDP service.....8
 - Creating trace user in unsecure Operational Database powered by Apache Accumulo deployment..... 11
 - Check trace table..... 12
 - Provide user permissions..... 13
 - Verify your Operational Database powered by Apache Accumulo installation..... 14

Installing Accumulo Parcel 1.0.0

Learn how to install the Operational Database powered by Apache Accumulo (Accumulo-on-cdp 1.0.0 parcel) on your CDP Private Cloud Base environment.

Install Operational Database powered by Apache Accumulo

Before installing Operational Database powered by Apache Accumulo (OpDB), you first have to install Cloudera Manager, CDP cluster services, then install the OpDB CSD and the OpDB Parcel. Ensure you verify your installation by running certain basic commands.

Install Operational Database powered by Apache Accumulo CSD file

As Operational Database powered by Apache Accumulo (OpDB) is an add-on service, you have to install its Custom Services Descriptor (CSD) file to manage the Accumulo on CDP service.

About this task

A Custom Services Descriptor (CSD) file contains all the configuration needed to describe and manage a new service. A CSD is provided in the form of a JAR file. For more information about CSD files, see the *Custom Service Descriptor Files* section in the *Add-on Services* documentation.

Before you begin

Install Cloudera Manager.

Procedure

1. Download the ACCUMULO_CDP-1.0.0 jar file for the CSD that provides the Accumulo on CDP service.

You can download that JAR file from:

```
archive.cloudera.com/p/accumulo7/1.0.0/csd
```

2. Copy the ACCUMULO_CDP-1.0.0.jar file to the location where Cloudera Manager is configured to look for the CSD files. That is by default in the /opt/cloudera/csd folder on the host where Cloudera Manager is running.
3. Restart Cloudera Manager as described in the *Configuring the Location of Customer Service* section in the *Add-on Services* documentation.

What to do next

Install CDP cluster and services.

Related Information

[Add-on Services](#)

Install CDP

Before you install the Operational Database powered by Apache Accumulo (OpDB) parcel, you have to install CDP Private Cloud Base and add the mandatory services.

The OpDB service is only supported on CDP Private Cloud Base. For full cluster installation Cloudera recommends following the [CDP Private Cloud Base Installation Guide](#).

For a FIPS compliant OpDB service you have to follow the FIPS deployment CDP setup steps. For more information, see [Installing and Configuring CDP with FIPS](#).

Ensure you install the following mandatory services for OpDB powered by Apache Accumulo:

- HDFS
- ZooKeeper

Install Operational Database powered by Apache Accumulo parcel

After you have installed the Operational Database powered by Apache Accumulo (OpDB) CSD and the required CDP cluster and services, you have to install the OpDB parcel.

There are two options to install the OpDB parcel:

- Using a Local Parcel Repository
- Using Remote Parcel Repository URLs (archive.cloudera.com)

Install Operational Database powered by Apache Accumulo parcel using Local Parcel Repository

You can install the OpDB powered by Apache Accumulo Parcel (OpDB) using your Local Parcel Repository. For this, you have to download the parcel, copy it to your Local Parcel Repository, and then distribute and activate it using Cloudera Manager.

Before you begin

- Install the OpDB CSD file
- Install CDP and add the HDFS and ZooKeeper services to your deployment.

Procedure

1. Download the ACCUMULO_ON_CDP-1.0.0.p0.11738502-el7.parcel OpDB parcel from:

```
archive.cloudera.com/p/accumulo7/1.0.0/parcels
```

2. Copy the ACCUMULO_ON_CDP-1.0.0.p0.11738502-el7.parcel file to the Local Parcel Repository. The Local Parcel Repository is by default located in `/opt/cloudera/parcel-repo` directory on the host where Cloudera Manager is running.

3. In Cloudera Manager, navigate to Parcels.

The screenshot shows the Cloudera Manager interface. On the left is a dark sidebar with the Cloudera Manager logo and a search bar. Below the search bar are navigation links: Clusters, Hosts, Diagnostics, Audits, Charts, Replication, Administration, Private Cloud (with a 'New' badge), Parcels, Running Commands, and Support. An orange arrow points to the 'Parcels' link. The main content area is titled 'Home' and shows 'Cluster 1' with a green checkmark. Below this is a list of services installed on the cluster, each with a green checkmark and a vertical ellipsis menu icon. The services listed are: Cloudera Runtime 7.1.5 (Parcels), 4 Hosts, ATLAS-1, HBASE-1, HDFS-1, HIVE-1, HIVE_ON_TEZ-1, HUE-1, IMPALA-1, KAFKA-1, KNOX-1, KUDU-1, LIVY-1, OOZIE-1, and OZONE-1.

4. Click Check for New Parcels.
The ACCUMULO_ON_CDP-1.0.0.p0.11738502-el7.parcel parcel appears in the Parcel list.
5. In the row of ACCUMULO_ON_CDP-1.0.0.p0.11738502-el7.parcel, click Distribute.
6. After the distribution is completed, click Activate.

Results

OpDB parcel is installed.

What to do next

Add the Accumulo on CDP service.

Install Operational Database powered by Apache Accumulo using Remote Parcel Repository

You can install the Operational Database powered by Apache Accumulo (OpDB) parcel using the archive.cloudera.com Remote Parcel Repository.

Before you begin

- Install the OpDB CSD file.
- Install CDP and add the HDFS and ZooKeeper services to your deployment.


Procedure

1. In Cloudera Manager, navigate to Parcels.

The screenshot shows the Cloudera Manager interface. On the left is a dark sidebar with the Cloudera Manager logo and a search bar. Below the search bar are several menu items: Clusters, Hosts, Diagnostics, Audits, Charts, Replication, Administration, and Private Cloud (marked as 'New'). At the bottom of the sidebar are 'Parcels' (highlighted with an orange arrow), 'Running Commands', and 'Support'. The main content area is titled 'Home' and has tabs for 'Status' (selected), 'All Health Issues', 'Configuration', and 'All Recent Commands'. Under the 'Status' tab, 'Cluster 1' is shown with a green checkmark icon. Below this is a table listing the services installed on Cluster 1, all with green checkmarks indicating they are healthy. The services listed are: Cloudera Runtime 7.1.5 (Parcels), 4 Hosts, ATLAS-1, HBASE-1, HDFS-1, HIVE-1, HIVE_ON_TEZ-1, HUE-1, IMPALA-1, KAFKA-1, KNOX-1, KUDU-1, LIVY-1, OOZIE-1, and OZONE-1.

Service	Status
Cloudera Runtime 7.1.5 (Parcels)	✓
4 Hosts	✓
ATLAS-1	✓
HBASE-1	✓
HDFS-1	✓
HIVE-1	✓
HIVE_ON_TEZ-1	✓
HUE-1	✓
IMPALA-1	✓
KAFKA-1	✓
KNOX-1	✓
KUDU-1	✓
LIVY-1	✓
OOZIE-1	✓
OZONE-1	✓

2. Click Parcel Repositories & Network Settings.

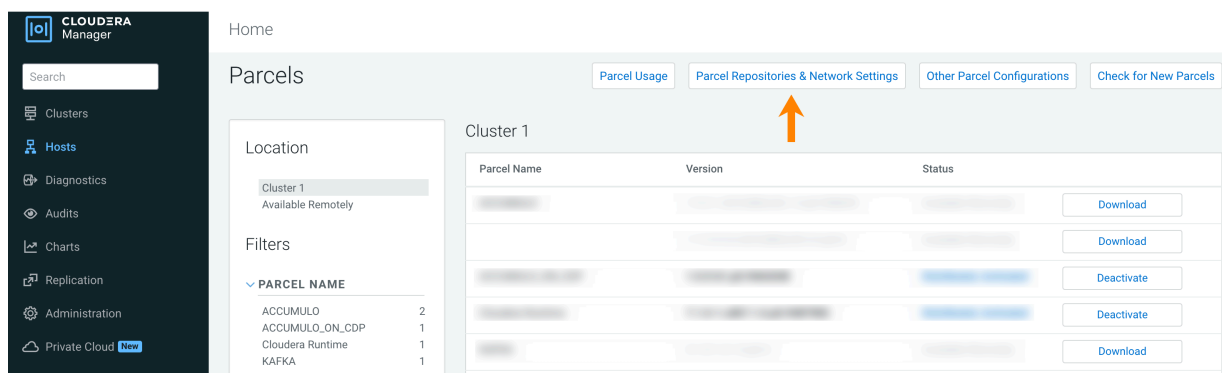

3.

In the Remote Parcel Repository URLs section, click  (Add Another) to include another remote parcel repository URL.

4. Add the following URL:

```
https://archive.cloudera.com/p/accumulo7/1.0.0/parcels/
```

5. Click Save & Verify Configuration.

6. In the row of ACCUMULO_ON_CDP 1.0.0.p0.11738502-el7.parcel, click Download.

7. After the download is completed, click Distribute.

8. Once the distribution is completed, click Activate.

What to do next

Add the Accumulo on CDP service.

Add Accumulo on CDP service

After you have installed the Operational Database powered by Apache Accumulo (OpDB) CSD, the required CDP cluster and services, and the OpDB parcel, you can add the Accumulo on CDP service to your cluster.

You can add a secure or an unsecure Accumulo on CDP service to your CDP Private Cloud Base deployment when installing OpDB. A secure Accumulo on CDP service requires a secure cluster, which means an SASL-enabled Kerberized cluster.

The steps to add a secure Accumulo on CDP service are different from the steps to add an unsecure Accumulo on CDP service. If you require a FIPS compliant OpDB service, follow the steps in the Add a secure Accumulo on CDP service to your cluster.

Add unsecure Accumulo on CDP service to your cluster

If your cluster is not an SASL enabled Kerberized cluster, add an unsecure Accumulo on CDP service to your cluster when installing Operational Database powered by Apache Accumulo (OpDB).


Before you begin

- Install OpDB CSD file.
- Install CDP and add the HDFS and ZooKeeper services to your deployment.
- Install the OpDB parcel.

Procedure

1. Navigate to the Cloudera Manager Admin Console home page.

- Click the action menu of the cluster to which you want to add the Accumulo on CDP service (for example, Cluster 1), and select Add Service.

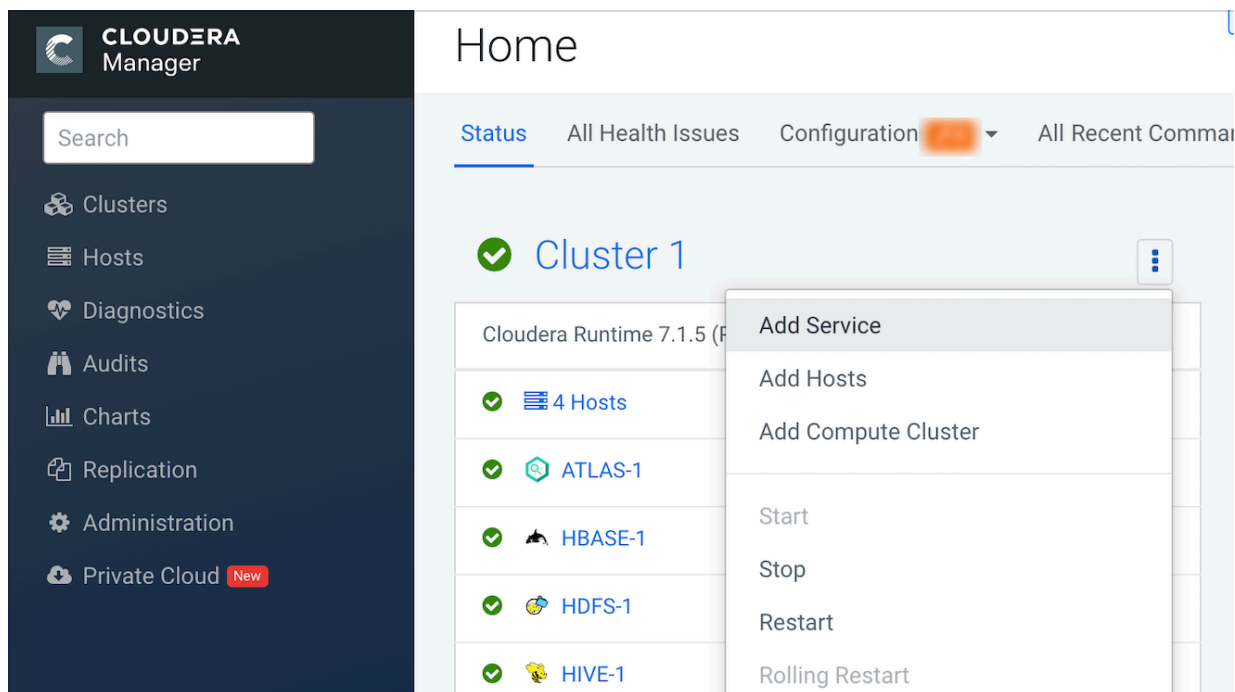

- Select Accumulo on CDP and click Continue.
- Select the dependent services and click Continue.
- Assign the Accumulo roles to the hosts in your cluster:
 - Assign a Table Server role on each host to which the DataNode role is assigned.
 - Assign the Monitor, Garbage Collector, Tracer, and Master role to non-DataNodes.
 - Assign the Gateway role to any hosts where you want to use the Accumulo on CDP service, and where you do not already have any other OpDB roles assigned.
- Click Continue.
- Configure the Accumulo Instance Secret.



Important: Cloudera recommends to protect this information, because the security of the Accumulo service relies on it.

- Set the Accumulo Instance Name.
- Set the Trace User and Trace Password settings.

It is recommended that you not leave the Trace User set to root, because this is not a secure configuration.
- If this is the first installation of OpDB, ensure that the Initial Accumulo option is selected.
- Click Continue.
- Wait while Cloudera Manager does the initial service setup.
- Click Continue.
- Click Finish.

What to do next

Ensure that the trace user and trace table exist.

Add secure Accumulo on CDP service to your cluster

To ensure data availability to diverse sets of users with varying levels of permissions and security clearance, add a secure Accumulo on CDP service.

About this task


If your secure Accumulo on CDP service needs to be FIPS compliant, ensure that you have followed the FIPS specific deployment setup steps provided in [Installing and Configuring CDP with FIPS](#).

Before you begin

- Install OpDB CSD file.
- Install CDP.
- Add the HDFS and ZooKeeper services to your CDP deployment.
- Install the OpDB parcel.
- Ensure that you have a SASL enabled Kerberized cluster.

Procedure

1. Navigate to the Cloudera Manager Admin Console home page.
2. Select the action menu of the cluster to which you want to add the Accumulo on CDP service (for example, Cluster 1), and select Add Service.

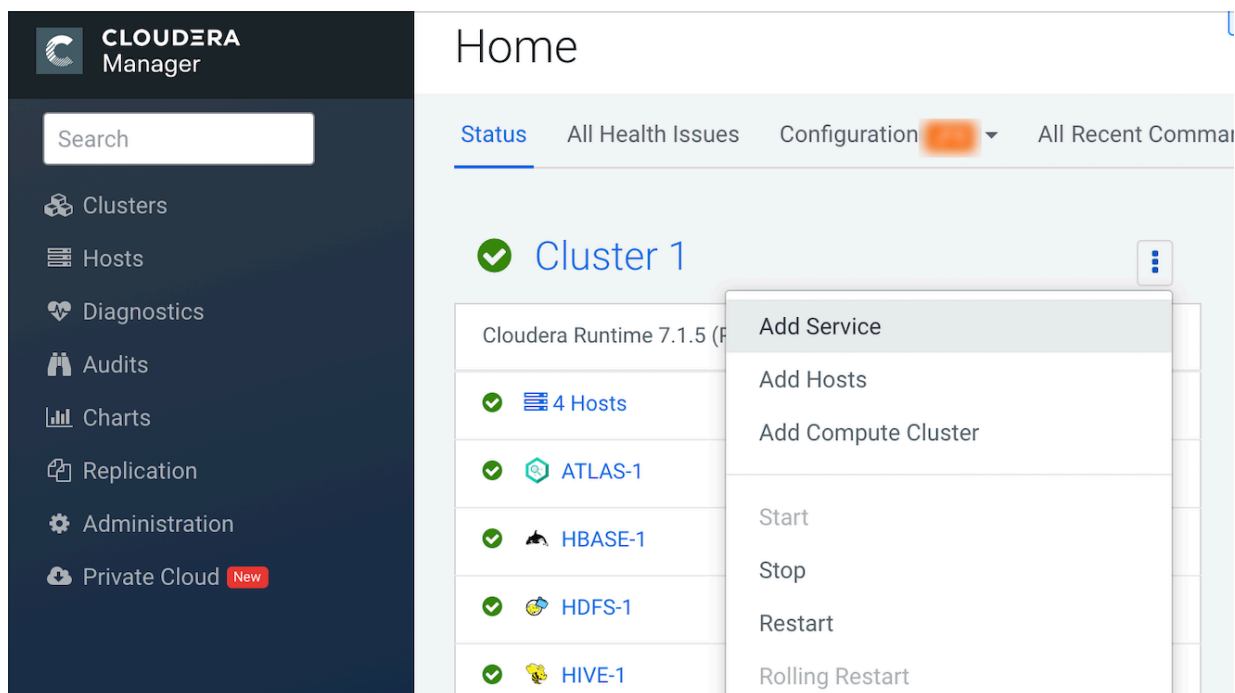

3. Select Accumulo on CDP and click Continue.
4. Select the dependent services and click Continue.
5. Assign the Accumulo roles to the hosts in your cluster:
 - Assign a Table Server role on each host to which the DataNode role is assigned.
 - Assign the Monitor, Garbage Collector, Tracer, and Master role to non-DataNodes.
 - Assign the Gateway role to any hosts here you want to use the OpDB service and that do not already have other OpDB roles assigned.
6. Click Continue.
7. Configure the Accumulo Instance Secret.



Important: Cloudera recommends to protect this information, because the security of the Accumulo service relies on it.

8. Set the Accumulo Instance Name.

9. Select Enable Kerberos Authentication.

Note: This setting overwrites the trace user with the default Accumulo Kerberos principal.

10. If this is the first installation of OpDB, ensure that the Initial Accumulo option is selected.

11. Click Continue.

12. Wait while Cloudera Manager does the initial service setup.

13. Click Continue.

14. Click Finish.

15. Restart all role except Tracers.

16. Create a client configuration file for the admin user.

This step needs to be performed on each Gateway machine where you will run an OpDB client.

Client configuration can be created by editing the configuration file in the following way:

```
auth.principal=accumulo/[ ***HOSTNAME*** ]
auth.type=kerberos
auth.token=/var/run/cloudera-scm-agent/process/[ ***TIMESTAMP*** ]-[ ***SERVICE NAME*** ]-[ ***INSTANCE NAME*** ]/accumulo_on_cdp.keytab
sas1.enabled=true
sas1.qop=auth-conf
```

By default the Accumulo principal on which master is running becomes the administrator principal. You can set up a different administrative user. For more information, see the [Administrative User section of the user manual](#). In this case you need to change the auth.principal and auth.token configuration properties accordingly.

What to do next

Ensure that the trace table exists.

Creating trace user in unsecure Operational Database powered by Apache Accumulo deployment

After you add an unsecure Accumulo on CDP service, you have to ensure that the trace user exists. This step is only required if you have an unsecure Operational Database powered by Apache Accumulo (OpDB) deployment.

About this task

This step is not required if you have a secure OpDB deployment, because in that case the trace user is automatically created when the Accumulo on CDP service is added to the cluster.

Before you begin

- Install the OpDB CSD file.
- Install CDP and add the HDFS and ZooKeeper services to your deployment.
- Install the OpDB parcel.
- Add an unsecure Accumulo on CDP to your deployment.

Ensure that you have added an unsecure OpDB service to your cluster.

Procedure

1. Launch the Accumulo shell for the admin user.

```
$ accumulo shell -u root
Password: *****
Shell - Apache Accumulo Interactive Shell
-
```

```
- version: [***ACCUMULO VERSION NUMBER***]
- instance name: [***ACCUMULO INSTANCE NAME***]
- instance id: [***ACCUMULO INSTANCE ID***]
-
- type 'help' for a list of available commands
-
root@accumulo>
```

2. List the existing users and check if trace user exists: `users`
If the trace user exists, you can continue your OpDB installation.
3. If the trace user does not exist, create it with the following command: `createuser trace`

What to do next

Ensure that the trace table exists.

Check trace table

After you have added the Accumulo on CDP service as a part of the Operational Database powered by Apache Accumulo (OpDB) installation, you have to check if the trace table, that records the time span of operations, exists.

About this task

OpDB records the time that various operations take when tracing is turned on. It follows all the requests made on behalf of the user throughout the distributed infrastructure of Accumulo, and across all threads of execution.

These timespans are inserted into the trace table in OpDB. You can browse recent traces from the Accumulo monitor page. You can also read the trace table directly like any other table.

Before you begin

- Install the OpDB CSD file.
- Install CDP and add the HDFS and ZooKeeper services to your deployment.
- Install the OpDB parcel.
- Add the Accumulo on CDP service to your deployment.

Procedure

1. Launch the Accumulo shell for the admin user.

For Unsecure OpDB

```
$ accumulo shell -u root
Password: *****
Shell - Apache Accumulo Interactive Shell
-
- version: [***ACCUMULO VERSION NUMBER***]
- instance name: [***ACCUMULO INSTANCE NAME***]
- instance id: [***ACCUMULO INSTANCE ID***]
-
- type 'help' for a list of available commands
-
root@accumulo>
```

For Secure OpDB

```
kinit -kt /var/run/cloudera-scm-agent/process/[***TIMESTAMP***]-[***SERVICE NAME***]-[***INSTANCE NAME***]/accumulo_on_cdp.keytab accumulo/$[***HOSTNAME***]
accumulo shell
Shell - Apache Accumulo Interactive Shell
```

```
-
- version: [***ACCUMULO VERSION NUMBER***]
- instance name: [***ACCUMULO INSTANCE NAME***]
- instance id: [***ACCUMULO INSTANCE ID***]
-
- type 'help' for a list of available commands
-
accumulo/hostname@REALM.COM@accumulo>
```

2. List tables and check if the trace table exists.

```
> tables
accumulo.metadata
accumulo.replication
accumulo.root
trace
>
```

3. If the trace table does not exist, create it with the following command: createtable trace

What to do next

Provide user permissions.

Provide user permissions

After the Accumulo on CDP service is added as part of the Operational Database powered by Apache Accumulo (OpDB), you have to provide privileges to the principal in which the Tracer is running.

Before you begin

- Install the OpDB CSD file.
- Install CDP and add the HDFS and ZooKeeper services to your deployment.
- Install the OpDB parcel.
- Add the Accumulo on CDP service.
- Check the trace table.

Procedure

1. Launch the Accumulo shell for the admin user.

- Unsecure OpDB

```
$ accumulo shell -u root
Password: *****
Shell - Apache Accumulo Interactive Shell
-
- version: [***ACCUMULO VERSION NUMBER***]
- instance name: [***ACCUMULO INSTANCE NAME***]
- instance id: [***ACCUMULO INSTANCE ID***]
-
- type 'help' for a list of available commands
-
root@accumulo>
```

- Secure OpDB

```
kinit -kt /var/run/cloudera-scm-agent/process/[***TIMESTAMP***]-[***SERVICE NAME***]-[***INSTANCE NAME***]/accumulo_on_cdp.keytab accumulo/$[***HOSTNAME***]
accumulo shell
```

```
Shell - Apache Accumulo Interactive Shell
-
- version: [***ACCUMULO VERSION NUMBER***]
- instance name: [***ACCUMULO INSTANCE NAME***]
- instance id: [***ACCUMULO INSTANCE ID***]
-
- type 'help' for a list of available commands
-
accumulo/hostname@REALM.COM@accumulo>
```

2. Add READ, WRITE, and ALTER_TABLE privileges to the principal in which the Tracer is running.

- Unsecure OpDB

```
grant Table.READ -t trace -u trace
grant Table.WRITE -t trace -u trace
grant Table.ALTER_TABLE -t trace -u trace
```

- Secure OpDB

```
'grant Table.READ -t trace -u accumulo/hostname@REALM.COM'
'grant Table.WRITE -t trace -u accumulo/hostname@REALM.COM'
'grant Table.ALTER_TABLE -t trace -u accumulo/hostname@REALM.COM'
```

In an unsecure OpDB deployment if you configured the trace user with a _HOST instance component, you must repeat this command with an instance for each host that will run a Tracer or Monitor role.

3. Start all Tracer roles.

What to do next

Verify your OpDB installation.

Verify your Operational Database powered by Apache Accumulo installation

You can verify your Operational Database powered by Apache Accumulo (OpDB) installation using the Accumulo shell.

Before you begin

- Install the OpDB CSD file.
- Install CDP and add the HDFS and ZooKeeper services to your deployment.
- Install the OpDB parcel.
- Add the Accumulo on CDP service to your deployment.
- Check trace table.
- Provide user permissions.

Procedure

1. Launch the Accumulo shell for the admin user.

- Unsecure OpDB

```
$ accumulo shell -u root
Password: *****
Shell - Apache Accumulo Interactive Shell
-
- version: [***ACCUMULO VERSION NUMBER***]
- instance name: [***ACCUMULO INSTANCE NAME***]
- instance id: [***ACCUMULO INSTANCE ID***]
-
- type 'help' for a list of available commands
-
```

```
root@accumulo>
```

- Secure OpDB

```
kinit -kt /var/run/cloudera-scm-agent/process/[***TIMESTAMP***]-[***SERVICE NAME***]-[***INSTANCE NAME***]/accumulo_on_cdp.keytab accumulo/${***HOSTNAME***}
accumulo shell
Shell - Apache Accumulo Interactive Shell
-
- version: [***ACCUMULO VERSION NUMBER***]
- instance name: [***ACCUMULO INSTANCE NAME***]
- instance id: [***ACCUMULO INSTANCE ID***]
-
- type 'help' for a list of available commands
-
accumulo/hostname@REALM.COM@accumulo>
```

2. Run the following commands to verify your installation:

- a) Create a table: createtable test
The test table is created and becomes the current table.
- b) List the admin user's permission and ensure it has admin and system level privileges: userpermission
- c) Please note, on a secure cluster the user creating the table does not get access to the new table by default. On a secure cluster these permissions have to be set manually:

```
'grant Table.READ -t test -u accumulo/hostname@REALM.COM'
'grant Table.WRITE -t test -u accumulo/hostname@REALM.COM'
'grant Table.ALTER_TABLE -t test -u accumulo/hostname@REALM.COM'
'grant Table.DROP_TABLE -t test -u accumulo/hostname@REALM.COM'
```

- d) Insert some rows to the test table:

```
insert row f1 q1 v1
insert row f2 q2 v2
insert row f3 q3 v3
```

- e) Scan the table: scan

```
row f1:q1 [] v1
row f2:q2 [] v2
row f3:q3 [] v3
```

- f) Delete the test table: root@accumulo test> deletetable
Table: [test] has been deleted.

Example

The following example shows the verification of an unsecured OpDB installation:

```
root@accumulo> createtable test
root@accumulo test> userpermissions
System permissions: System.GRANT, System.CREATE_TABLE, System.DROP_TABLE, System.ALTER_TABLE, System.CREATE_USER, System.DROP_USER, System.ALTER_USER, System.SYSTEM, System.CREATE_NAMESPACE, System.DROP_NAMESPACE, System.ALTER_NAMESPACE, System.OBTAIN_DELEGATION_TOKEN

Namespace permissions (accumulo): Namespace.READ, Namespace.ALTER_TABLE

Table permissions (accumulo.metadata): Table.READ, Table.ALTER_TABLE
Table permissions (accumulo.replication): Table.READ
Table permissions (accumulo.root): Table.READ, Table.ALTER_TABLE
Table permissions (test): Table.READ, Table.WRITE, Table.BULK_IMPORT, Table.ALTER_TABLE, Table.GRANT, Table.DROP_TABLE, Table.GET_SUMMARIES
```

```
Table permissions (trace): Table.READ, Table.WRITE, Table.BULK_IMPORT, Table.ALTER_TABLE, Table.GRANT, Table.DROP_TABLE, Table.GET_SUMMARIES
root@accumulo test> insert row f1 q1 v1
root@accumulo test> insert row f2 q2 v2
root@accumulo test> insert row f3 q3 v3
root@accumulo test> scan
row f1:q1 [] v1
row f2:q2 [] v2
row f3:q3 [] v3
root@accumulo test> deletetable
deletetable { test } (yes|no)? yes
Table: [test] has been deleted.
root@accumulo>
```