

# Ranger Authorization

Date published:

Date modified:

# CLOUDERA

# Legal Notice

© Cloudera Inc. 2025. All rights reserved.

The documentation is and contains Cloudera proprietary information protected by copyright and other intellectual property rights. No license under copyright or any other intellectual property right is granted herein.

Unless otherwise noted, scripts and sample code are licensed under the Apache License, Version 2.0.

Copyright information for Cloudera software may be found within the documentation accompanying each component in a particular release.

Cloudera software includes software from various open source or other third party projects, and may be released under the Apache Software License 2.0 (“ASLv2”), the Affero General Public License version 3 (AGPLv3), or other license terms. Other software included may be released under the terms of alternative open source licenses. Please review the license and notice files accompanying the software for additional licensing information.

Please visit the Cloudera software product page for more information on Cloudera software. For more information on Cloudera support services, please visit either the Support or Sales page. Feel free to contact us directly to discuss your specific needs.

Cloudera reserves the right to change any products at any time, and without notice. Cloudera assumes no responsibility nor liability arising from the use of products, except as expressly agreed to in writing by Cloudera.

Cloudera, Cloudera Altus, HUE, Impala, Cloudera Impala, and other Cloudera marks are registered or unregistered trademarks in the United States and other countries. All other trademarks are the property of their respective owners.

Disclaimer: EXCEPT AS EXPRESSLY PROVIDED IN A WRITTEN AGREEMENT WITH CLOUDERA, CLOUDERA DOES NOT MAKE NOR GIVE ANY REPRESENTATION, WARRANTY, NOR COVENANT OF ANY KIND, WHETHER EXPRESS OR IMPLIED, IN CONNECTION WITH CLOUDERA TECHNOLOGY OR RELATED SUPPORT PROVIDED IN CONNECTION THEREWITH. CLOUDERA DOES NOT WARRANT THAT CLOUDERA PRODUCTS NOR SOFTWARE WILL OPERATE UNINTERRUPTED NOR THAT IT WILL BE FREE FROM DEFECTS NOR ERRORS, THAT IT WILL PROTECT YOUR DATA FROM LOSS, CORRUPTION NOR UNAVAILABILITY, NOR THAT IT WILL MEET ALL OF CUSTOMER’S BUSINESS REQUIREMENTS. WITHOUT LIMITING THE FOREGOING, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, CLOUDERA EXPRESSLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, QUALITY, NON-INFRINGEMENT, TITLE, AND FITNESS FOR A PARTICULAR PURPOSE AND ANY REPRESENTATION, WARRANTY, OR COVENANT BASED ON COURSE OF DEALING OR USAGE IN TRADE.

# Contents

<b>Using Ranger to Provide Authorization in CDP.....</b>	<b>5</b>
<b>Ranger special entities.....</b>	<b>5</b>
<b>Enabling Ranger HDFS plugin manually on a Data Hub.....</b>	<b>6</b>
<b>Ranger Policies Overview.....</b>	<b>8</b>
Ranger tag-based policies.....	9
Tags and policy evaluation.....	10
Ranger access conditions.....	11
<b>Using the Ranger Console.....</b>	<b>13</b>
Accessing the Ranger console.....	14
Ranger console navigation.....	15
<b>Resource-based Services and Policies.....</b>	<b>18</b>
Configuring resource-based services.....	18
Configure a resource-based service: ADLS.....	18
Configure a resource-based service: Atlas.....	20
Configure a resource-based service: HBase.....	22
Configure a resource-based service: HDFS.....	24
Configure a resource-based service: Hive.....	26
Configure a resource-based service: Kafka.....	28
Configure a resource-based service: Knox.....	30
Configure a resource-based service: NiFi.....	32
Configure a resource-based service: NiFi Registry.....	34
Configure a resource-based service: S3.....	36
Configure a resource-based service: Solr.....	38
Configure a resource-based service: YARN.....	39
Configuring resource-based policies.....	41
Configure a resource-based policy: ADLS.....	42
Configure a resource-based policy: Atlas.....	43
Configure a resource-based policy: HBase.....	45
Configure a resource-based policy: HDFS.....	48
Configure a resource-based policy: HadoopSQL.....	50
Configure a resource-based storage handler policy: HadoopSQL.....	54
Configure a resource-based policy: Kafka.....	57
Configure a resource-based policy: Knox.....	59
Configure a resource-based policy: NiFi.....	61
Configure a resource-based policy: NiFi Registry.....	63
Configure a resource-based policy: S3.....	65
Configure a resource-based policy: Solr.....	67
Configure a resource-based policy: YARN.....	69
Wildcards and variables in resource-based policies.....	71

Preloaded resource-based services and policies.....	72
Importing and exporting resource-based policies.....	78
Import resource-based policies for a specific service.....	80
Import resource-based policies for all services.....	82
Export resource-based policies for a specific service.....	85
Export all resource-based policies for all services.....	86
Row-level filtering and column masking in Hive.....	88
Row-level filtering in Hive with Ranger policies.....	88
Dynamic resource-based column masking in Hive with Ranger policies.....	92
Dynamic tag-based column masking in Hive with Ranger policies.....	96
<b>Tag-based Services and Policies.....</b>	<b>100</b>
Adding a tag-based service.....	100
Adding tag-based policies.....	101
Using tag attributes and values in Ranger tag-based policy conditions.....	104
Adding a tag-based PII policy.....	106
Default EXPIRES ON tag policy.....	110
Importing and exporting tag-based policies.....	113
Import tag-based policies.....	115
Export tag-based policies.....	117
<b>Create a time-bound policy.....</b>	<b>119</b>
<b>Ranger Security Zones.....</b>	<b>121</b>
Overview.....	121
Adding a Ranger security zone.....	122
<b>Administering Ranger Users, Groups, Roles, and Permissions.....</b>	<b>126</b>
Add a user.....	128
Edit a user.....	129
Delete a user.....	131
Add a group.....	132
Edit a group.....	133
Delete a group.....	135
Add a role through Ranger.....	136
Add a role through Hive.....	138
Edit a role.....	140
Delete a role.....	142
Add or edit permissions.....	142
<b>Administering Ranger Reports.....</b>	<b>144</b>
View Ranger reports.....	144
Search Ranger reports.....	145
Export Ranger reports.....	146
<b>Using Ranger client libraries.....</b>	<b>147</b>
<b>Using session cookies to validate Ranger policies.....</b>	<b>148</b>



## Using Ranger to Provide Authorization in CDP

Apache Ranger manages access control through a user interface that ensures consistent policy administration across Cloudera Data Platform (CDP) components. Security administrators can define security policies at the database, table, column, and file levels, and can administer permissions for specific LDAP-based groups or individual users. Rules based on dynamic conditions such as time or geolocation can also be added to an existing policy rule. The Ranger authorization model is pluggable and can be easily extended to any data source using a service-based definition.

Once a user has been authenticated, their access rights must be determined. Authorization defines user access rights to resources. For example, a user may be allowed to create a policy and view reports, but not allowed to edit users and groups. You can use Ranger to set up and manage access to Hadoop services.

Ranger enables you to create services for specific resources (HDFS, HBase, Hive, etc.) and add access policies to those services. Ranger security zones enable you to organize service resources into multiple security zones. You can also create tag-based services and add access policies to those services. Using tag-based policies enables you to control access to resources across multiple components without creating separate services and policies in each component. You can also use Ranger TagSync to synchronize the Ranger tag store with an external metadata service such as Apache Atlas.



### Note:

You can configure authorization using the Ranger UI, REST APIs, or client libraries. For more information about:

- Ranger REST APIs, see “Apache Ranger REST API: Resources”.
- Ranger client libraries, see “Using Ranger client libraries”.

## Ranger special entities

Ranger in CDP has specific, internal groups and entities that affect user authorization and access to all services in CDP.

In addition to any users, group, roles and permissions that you define using Ranger, you must understand the following Ranger special entities:

### "public" group

A special, internal group within Ranger that consists of all users, including future users. Membership is implicit and automatic.



**Note:** All users belong to "public" group. Any policies granted to this group provide access to everyone.

The following, default policies give permissions to members of group "public":

- all - database > public > create permission
- default database tables columns > public > create permission
- Information\_schema database tables columns > public > select permission

You can remove “public” from these default policies to further restrict user access, based on your security requirements.

### {OWNER} special entity

A special Ranger entity attached to a user based on their actions. For example, when a user "bob" creates a table, "bob" becomes the {OWNER} of that table and would get any permissions provided to {OWNER} on that table across all the policies. The following default policies have permissions for {OWNER}:

- all - database, table, column > {OWNER} > all permissions
- all - database, table > {OWNER} > all permissions
- all - database, udf > {OWNER} > all permissions
- all - database > {OWNER} > all permissions

Although not recommended, you can modify access to special entity {OWNER}, based on your security requirements. Removing the default {OWNER} permissions may require adding additional, specific policies for each object owner, which may increase your policy management operational burden.

## Enabling Ranger HDFS plugin manually on a Data Hub

How to enable an HDFS plugin for Ranger, service-wide, on a Data Hub using Cloudera Manager.

### About this task

The Ranger HDFS plug-in helps to centralize HDFS authorization policies. Apache Ranger plugins validate the access of a user against the authorization policies defined in the Apache Ranger policy administration server, and stored in the HDFS service instance, also called a repository. When you enable the Ranger HDFS plugin and an HDFS service user attempts access, Ranger checks whether a policy exists granting or denying the user access. If no policy exists, Ranger defaults to use the native permissions model in HDFS. Access control rules configured through this combination of Ranger HDFS plugin and native file system permissions apply.


To enable users define Ranger authorization policies, using an HDFS service plugin:

### Procedure

1. In a DataHub, go to Cloudera Manager HDFS Configuration .


- In Search, type Ranger Service, then click the box to enable the hdfs (service-wide) parameter for Ranger Service.

**Figure 1: Enabling the HDFS Ranger plugin parameter on a Data Hub**

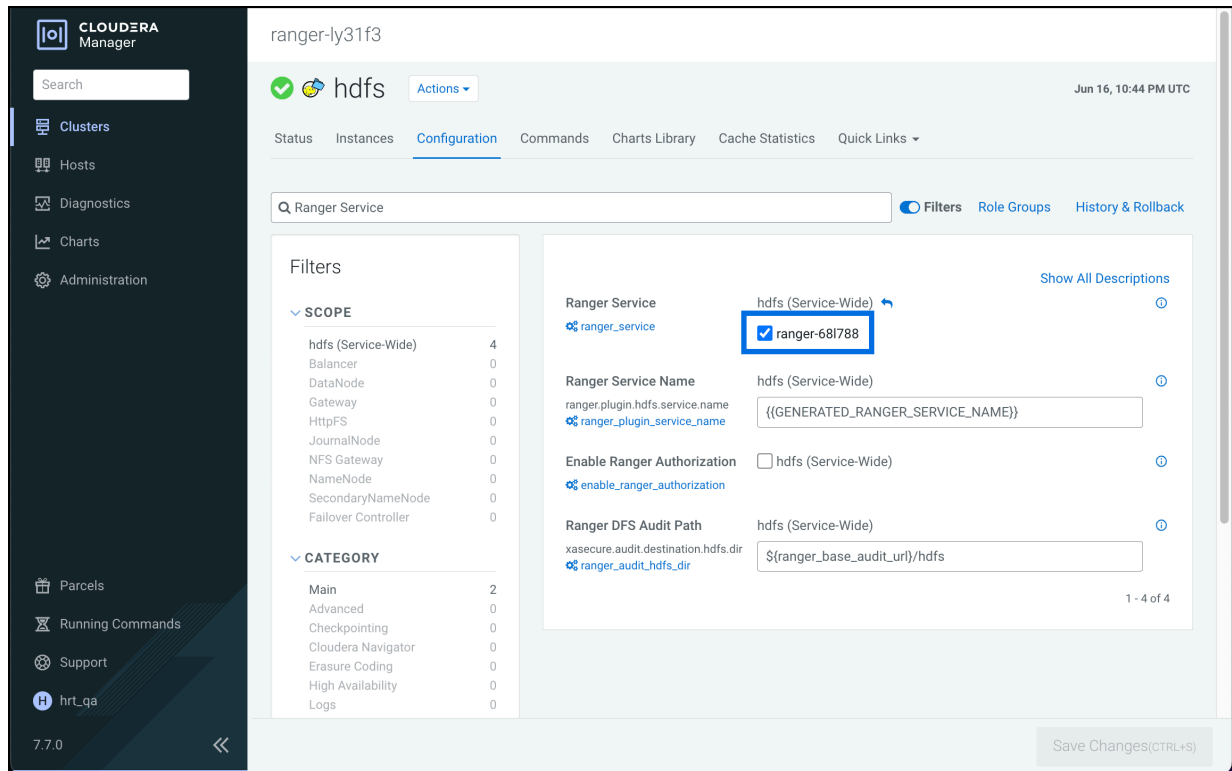

A stale configuration icon displays for the hdfs service.


**Figure 2: Result of adding a new configuration parameter**

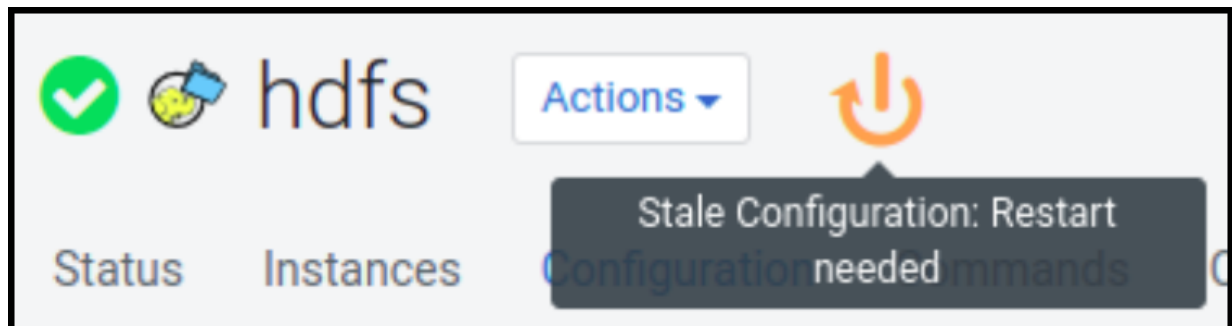

- Before restarting Hdfs service for stale configurations, choose HDFS Actions Create Ranger Repository . After progress completes, close the Create Repository dialog.
- Now proceed to restart the Hdfs service. Click HDFS Actions Restart . After progress completes, close the Restart dialog.
- On the Data Lake, log in to Ranger.
- Go to Admin Web UI Access Manager .

7. In Service Manager HDFS , confirm that (DataHub cluster name)\_hdfs appears.

**Figure 3: Confirming HDFS plugin added**

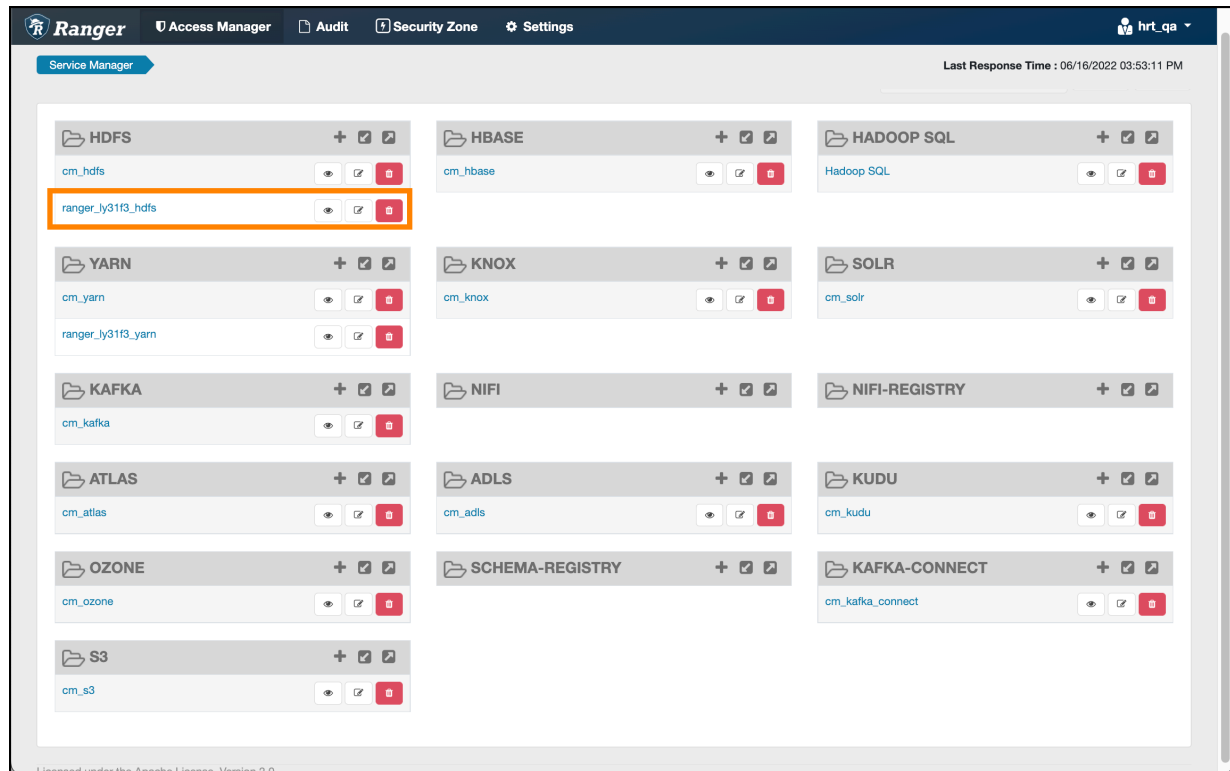

8. Go to Audit Plugins .

### Results

Confirm that the Http response code for the Ranger Hdfs plugin enabled on the DataHub Hdfs service displays 200 (successful).

**Figure 4: Confirming successful http response**

The screenshot shows the Ranger Audit Plugins page. The 'Plugins' tab is selected. A table displays the audit results for various plugins. The 'Http Response Code' column shows '200' for the 'ranger\_ly31f3\_hdfs' plugin, which is highlighted with an orange box.

Export Date ( Pacific Daylight Time ) *	Service Name	Plugin ID	Plugin IP	Cluster Name	Http Response Code	Status
06/16/2022 02:57:06 PM	ranger_ly31f3_hdfs	hdfs@ranger-ly31f3-master1.ranger...	172.27.195.0	ranger-ly31f3	200	Policies synced to plugin
06/16/2022 02:57:06 PM	ranger_ly31f3_hdfs	hdfs@ranger-ly31f3-master0.ranger...	172.27.196.3	ranger-ly31f3	200	Policies synced to plugin
06/16/2022 05:42:13 AM	cm_knox	knox@ranger-ly31f3-manager0-cm...	172.27.82.10	ranger-ly31f3	200	Policies synced to plugin
			172.27.165.74	ranger-ly31f3	200	Policies synced to plugin

## Ranger Policies Overview

Ranger has two types of policies: resource-based and tag-based.

## Resource-based policies

Ranger enables you to configure resource-based services (HDFS, HBase, Hive, etc.) and add access policies to those services.

## Tag-based policies

Ranger enables you to create tag-based services and add access policies to those services.

# Ranger tag-based policies

Ranger enables you to create tag-based services and add access policies to those services.

## Tag-Based Policies Overview

- An important feature of Ranger tag-based authorization is the separation of resource-classification from access-authorization. For example, resources (HDFS file/directory, Hive database/table/column etc.) containing sensitive data such as social security numbers, credit card numbers, or sensitive health care data can be tagged with PII/PCI/PHI – either as the resource enters the Hadoop ecosystem or at a later time. Once a resource is tagged, the authorization for the tag would be automatically enforced, thus eliminating the need to create or update policies for the resource.
- Using tag-based policies also enables you to control access to resources across multiple Hadoop components without creating separate services and policies in each component.
- Tag details are stored in a tag store. Ranger TagSync can be used to synchronize the tag store with an external metadata service such as Apache Atlas.

## Tag Store

Details of tags associated with resources are stored in a tag store. Apache Ranger plugins retrieve the tag details from the tag store for use during policy evaluation. To minimize the performance impact during policy evaluation (in finding tags for resources), Apache Ranger plugins cache the tags and periodically poll the tag store for any changes. When a change is detected, the plugins update the cache. In addition, the plugins store the tag details in a local cache file – just as the policies are stored in a local cache file. On component restart, the plugins will use the tag data from the local cache file if the tag store is not reachable.

Apache Ranger plugins download the tag details from the store managed by Ranger Admin. Ranger Admin persists the tag details in its policy store and provides a REST interface for the plugins to download the tag details.

## Tags

Ranger Tags can have attributes. Tag attribute values can be used in Ranger tag-based policies to influence the authorization decision.

For example, to deny access to a resource after a specific date:

1. Add the EXPIRES\_ON tag to the resource.
2. Add an expiry\_date tag attribute and set its value to the expiry date.
3. Create a Ranger policy for the EXPIRES\_ON tag.
4. Add a condition in this policy to deny access when the date specified in the expiry\_date tag attribute is later than the current date.

Note that the EXPIRES\_ON tag policy is created as the default policy in tag service instances.

## TagSync


Ranger TagSync is used to synchronize the tag store with an external metadata service such as Apache Atlas. TagSync is a daemon process similar to the Ranger UserSync process.

Ranger TagSync receives tag details from Apache Atlas via change notifications. As tags are added to, updated, or deleted from resources in Apache Atlas, Ranger TagSync receives notifications and updates the tag store.

## Tags and policy evaluation

When authorizing an access request, an Apache Ranger plugin evaluates applicable Ranger policies for the resource being accessed. The following diagram shows the details of the policy evaluation flow. More details on the steps in this workflow are provided in the subsequent sections.

### Apache Ranger Policy Evaluation Flow with Tags

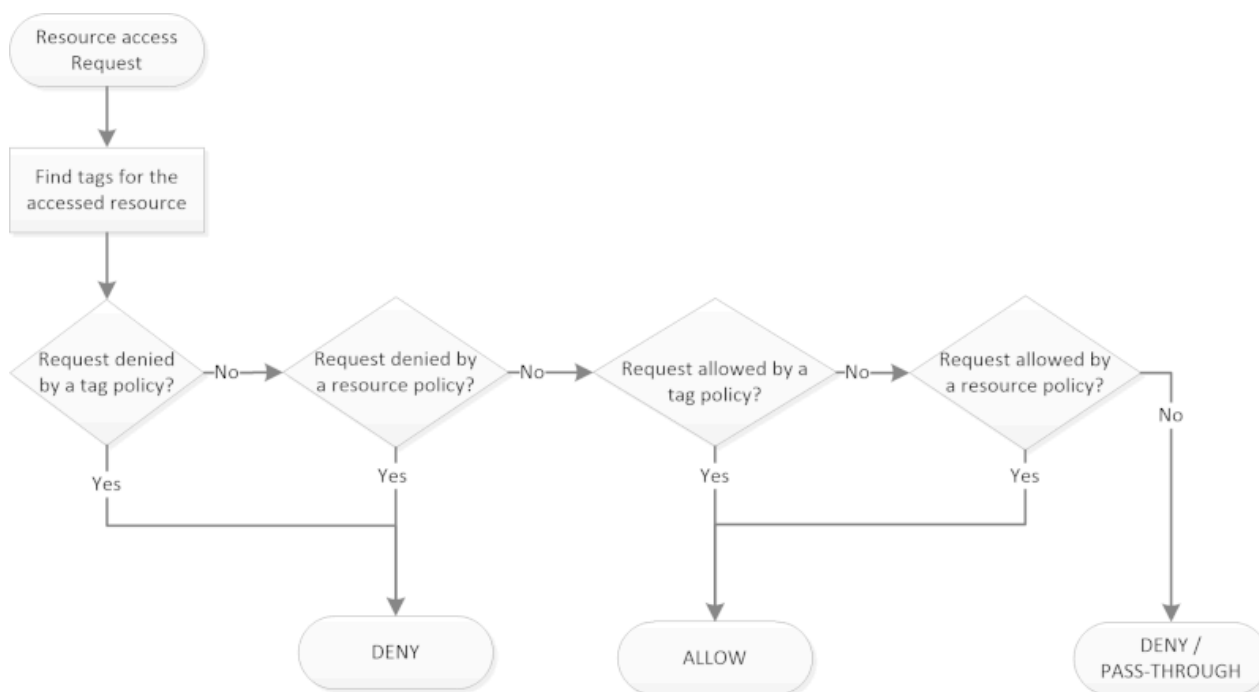

### Apache Ranger Policy Evaluation Flow with Tags

#### Finding Tags

Apache Ranger supports a service to register context enrichers, which are used to update context data to the access request.

The Ranger Tag service, which is part of the tag-based policies feature, adds a context enricher named RangerTagEnricher. This context enricher is responsible for finding tags for the requested resource and adding the tag details to the request context. This context enricher keeps a cache of the available tags; while processing an access request, it finds the tags applicable for the requested resource and adds the tags to the request context. The context enricher keeps the cache updated by periodically polling Ranger Admin for changes.

#### Evaluating Tag-Based Policies

Once the list of tags for the requested resource is found, the Apache Ranger policy engine evaluates the tag-based policies applicable to the tags. If a policy for one of these tag results in a deny, access will be denied. If none of the tags are denied, and if a policy allows for one of the tags, access will be allowed. If there is no result for any tag, or if there are no tags for the resource, the policy engine will evaluate the resource-based policies to make the authorization decision.

## Using Tags in Conditions

Apache Ranger allows the use of custom conditions while evaluating authorization policies. The Apache Ranger policy engine makes various request details – such as user, groups, resource, and context – available to the conditions. Tags in the request context, which are added by the enricher, are available to the conditions and can be used to influence the authorization decision.

The default policy in tag service instances, the EXPIRES\_ON tag, uses such condition to check to see if the request date is later than the value specified in tag attribute expiry\_date. This default policy does not work unless an EXPIRES\_ON tag has been created in Atlas.

## Related Information

[Apache Ranger Wiki> Context Enrichers](#)

## Ranger access conditions

The Apache Ranger access policy model consists of two major components: specification of the resources a policy is applied to, such as HDFS files and directories, Hive databases, tables, and columns, HBase tables, column-families, and columns, and so on; and the specification of access conditions for specific users and groups

## Allow Deny and Exclude Conditions

Apache Ranger supports the following access conditions:

- Allow
- Exclude from Allow
- Deny
- Exclude from Deny

These access conditions enable you to set up fine-grained access control policies.

For example, you can allow access to a "finance" database to all users in the "finance" group, but deny access to all users in the "interns" group. Let's say that one of the members of the "interns" group, "scott", needs to work on an assignment that requires access to the "finance" database. In that case, you can add an Exclude from Deny condition that will allow user "scott" to access the "finance" database. The following image shows how this policy would be set up in Apache Ranger:

**Policy Details :**

Policy ID **15**

Policy Name \*  **enabled**

Hive Database \*  **Include**

table \*  **Include** ← **Resource**

Hive Column \*  **Include**

Description

Audit Logging **YES**

**Allow Conditions :**

Select Group	Select User	Permissions	Delegate Admin	
<input type="text" value="finance"/>	<input type="text" value="Select User"/>	<input type="text" value="All"/>	<input checked="" type="checkbox"/>	<input type="button" value="X"/>

Exclude from Allow Conditions :

**Deny Conditions :**

Select Group	Select User	Permissions	Delegate Admin	
<input type="text" value="interns"/>	<input type="text" value="Select User"/>	<input type="text" value="All"/>	<input checked="" type="checkbox"/>	<input type="button" value="X"/>

Exclude from Deny Conditions :


Select Group	Select User	Permissions	Delegate Admin	
<input type="text" value="Select Group"/>	<input type="text" value="X SCOR"/>	<input type="text" value="select"/>	<input type="checkbox"/>	<input type="button" value="X"/>

**Deny Excludes**

### Policy Evaluation of Access Conditions

Apache Ranger policies are evaluated in a specific order to ensure predictable results (if there is no access policy that allows access, the authorization request will typically be denied). The following diagram shows the policy evaluation work-flow:



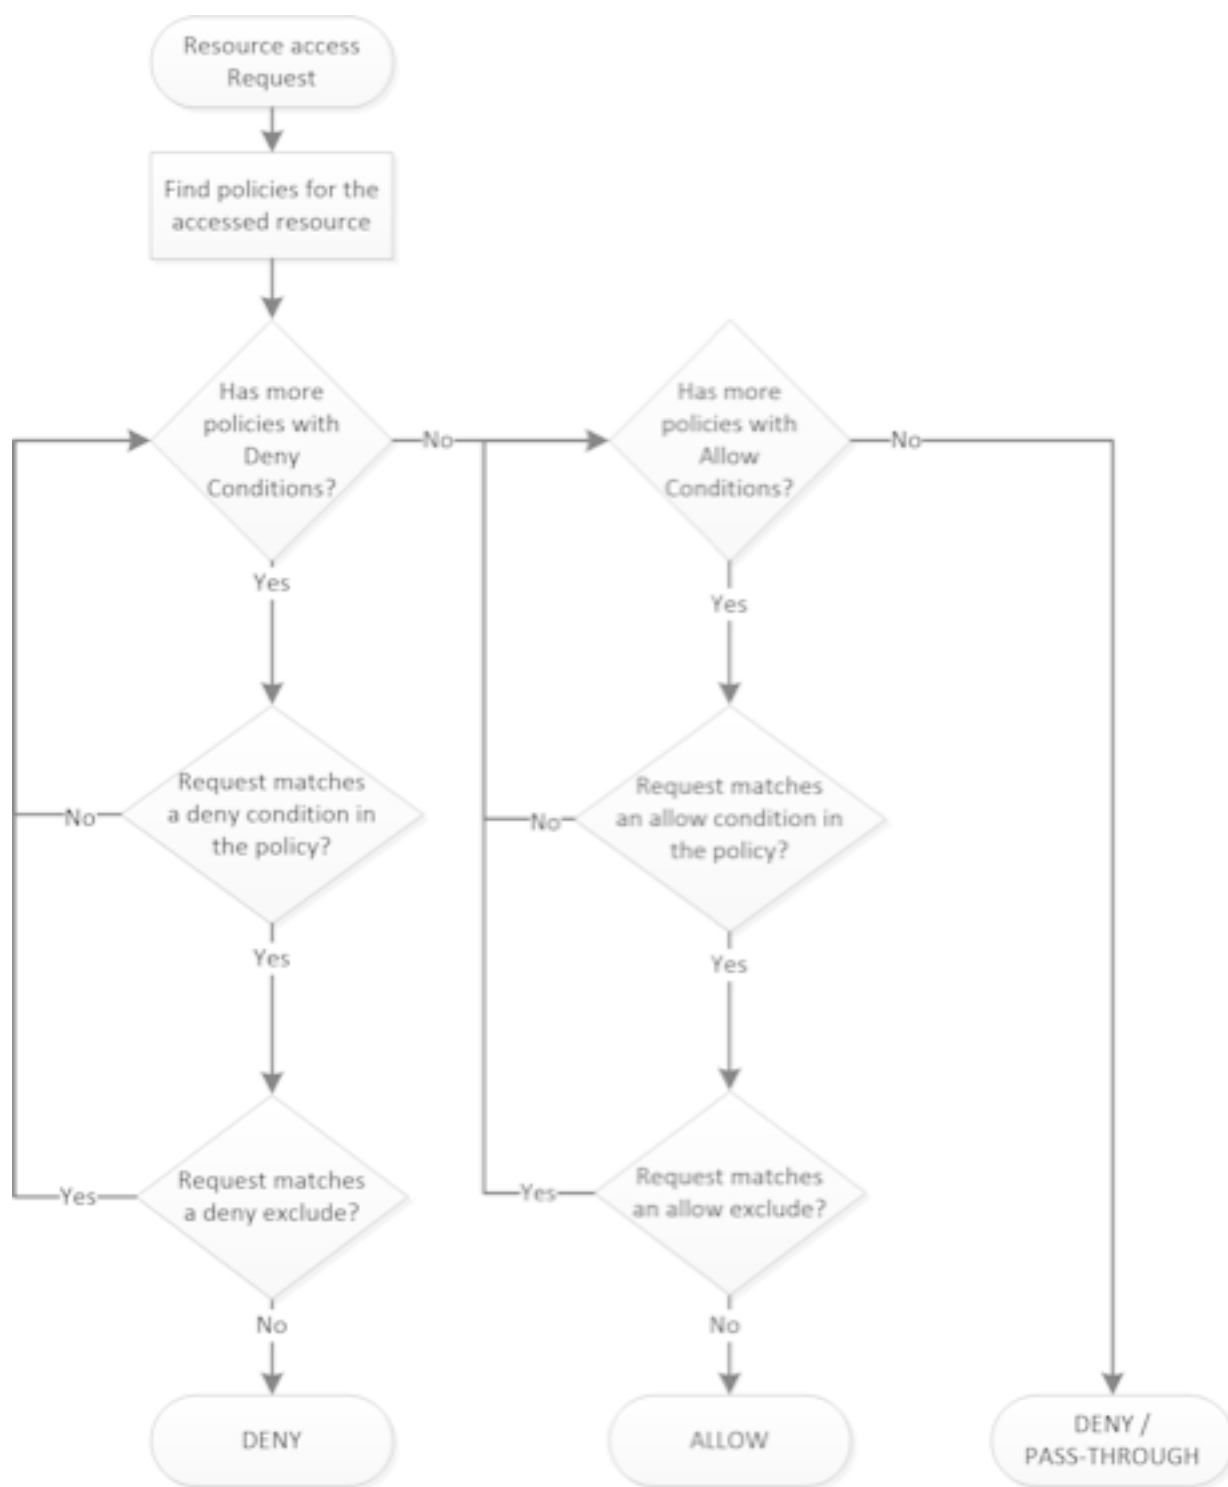

Apache Ranger Policy Evaluation Flow


## Using the Ranger Console

This chapter contains an overview of the Ranger console.


## Accessing the Ranger console

How to access the Ranger console.

To access the Ranger Console, click the Ranger Admin web UI link, enter your user name and password, then click Sign In.

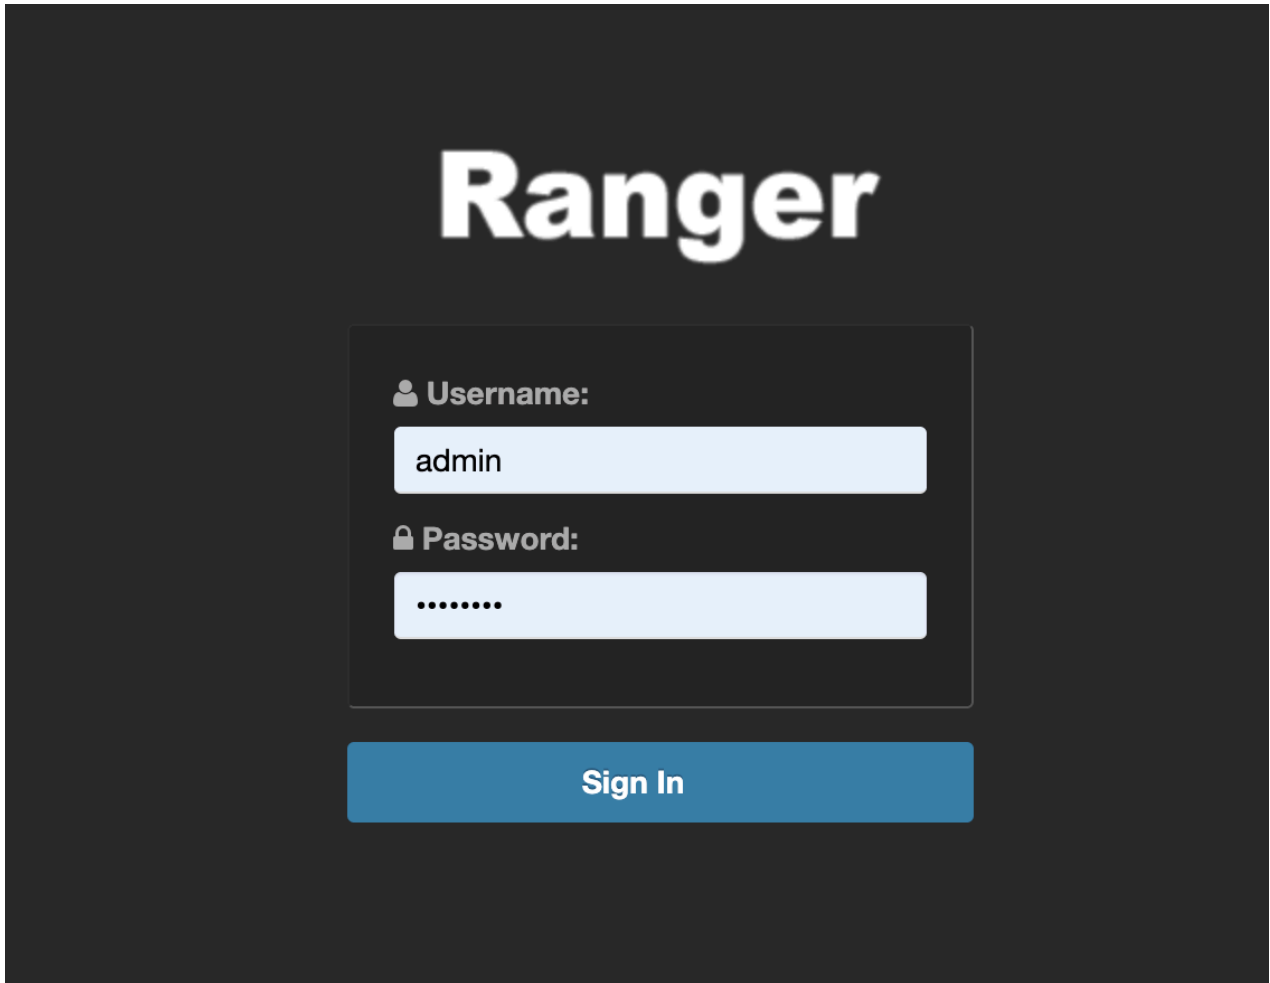The image shows the Ranger Console Home Page. It has a dark gray background. At the top center, the word "Ranger" is written in a large, white, sans-serif font. Below this, there is a white-bordered box containing the login fields. The first field is labeled "Username:" with a user icon, and it contains the text "admin". The second field is labeled "Password:" with a lock icon, and it contains seven dots. Below these fields is a blue button with the text "Sign In" in white.

Ranger Console Home Page

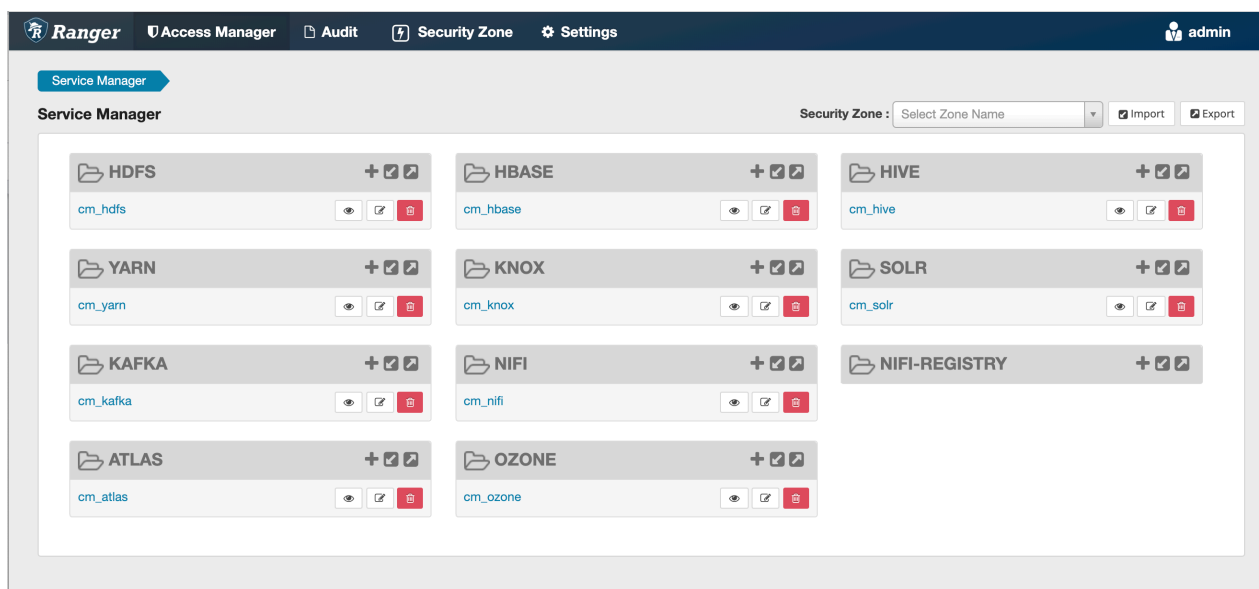


After you log in, your user name is displayed at the top right of the Ranger Console.


## Ranger console navigation

Explains the basic Ranger console/GUI.

- The Service Manager for Resource Based Policies page is displayed when you log in to the Ranger Console. You can use this page to create services for Hadoop resources (HDFS, HBase, Hive, etc.) and add access policies to those resources.

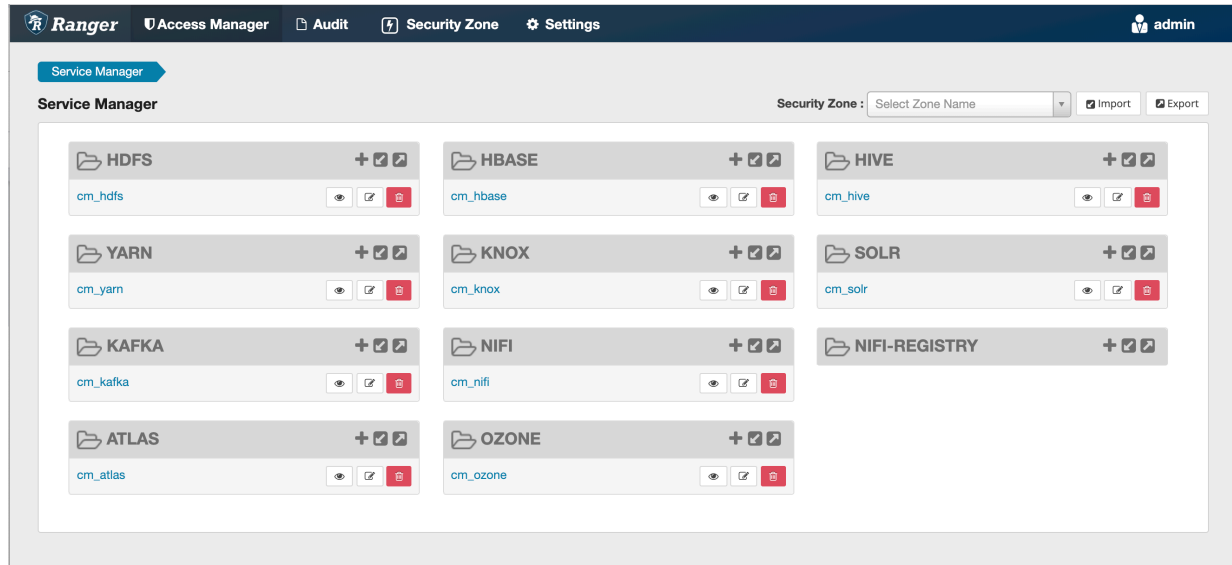


Clicking Access Manager in the top menu opens the Service Manager for Resource Based Policies page, and also displays a submenu with links to Resource Based Policies, Tag Based Policies, and Reports (this submenu is also displayed when you pass the mouse over the Access Manager link).

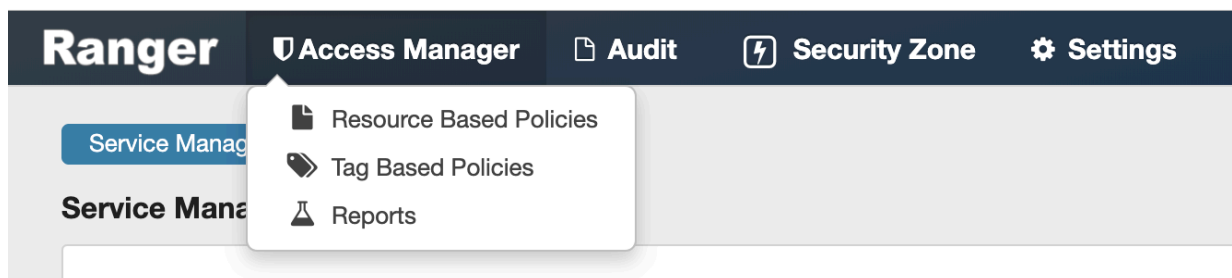


- Access Manager > Resource Based Policies -- Opens the Service Manager for Resource Based Policies page. You can use this page to create services for resources (HDFS, HBase, Hive, etc.) and add access policies to those services.
- Access Manager > Tag Based Policies -- Opens the Service Manager for Tag Based Policies page. You can use this page to create tag-based services and add access policies to those services. Using tag-based policies enables you to control access to resources across multiple components without creating separate services and policies in each component.
- Access Manager > Reports -- Opens the Reports page. You can use this page to generate user access reports for resource and tag-based policies based on search criteria such as policy name, resource, group, and user name.


- **Audit** -- You can use the Audit page to monitor user activity at the resource level, and also to set up conditional auditing based on users, groups, or time. The Audit page includes the Access, Admin, Login Sessions, Plugins, Plugin Status, and User Sync tabs.

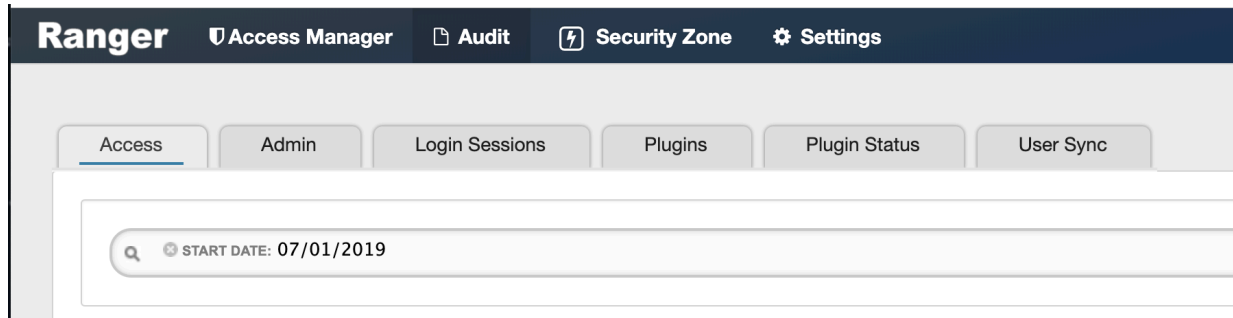

- **Security Zone** -- Lets you organize resource and tag-based services and policies into separate security zones. You can assign one or more administrators for each security zone. Security zone administrators can then create and update policies for their security zone.

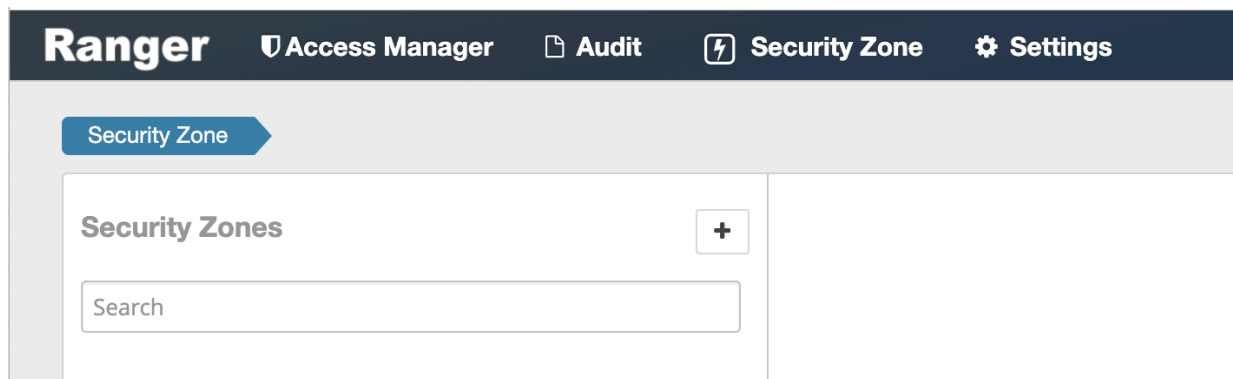

- **Settings** -- Enables you to manage and assign policy permissions to users and groups. Clicking or passing the mouse over Settings displays a submenu with links to the Users/Groups/Roles and Permissions pages.

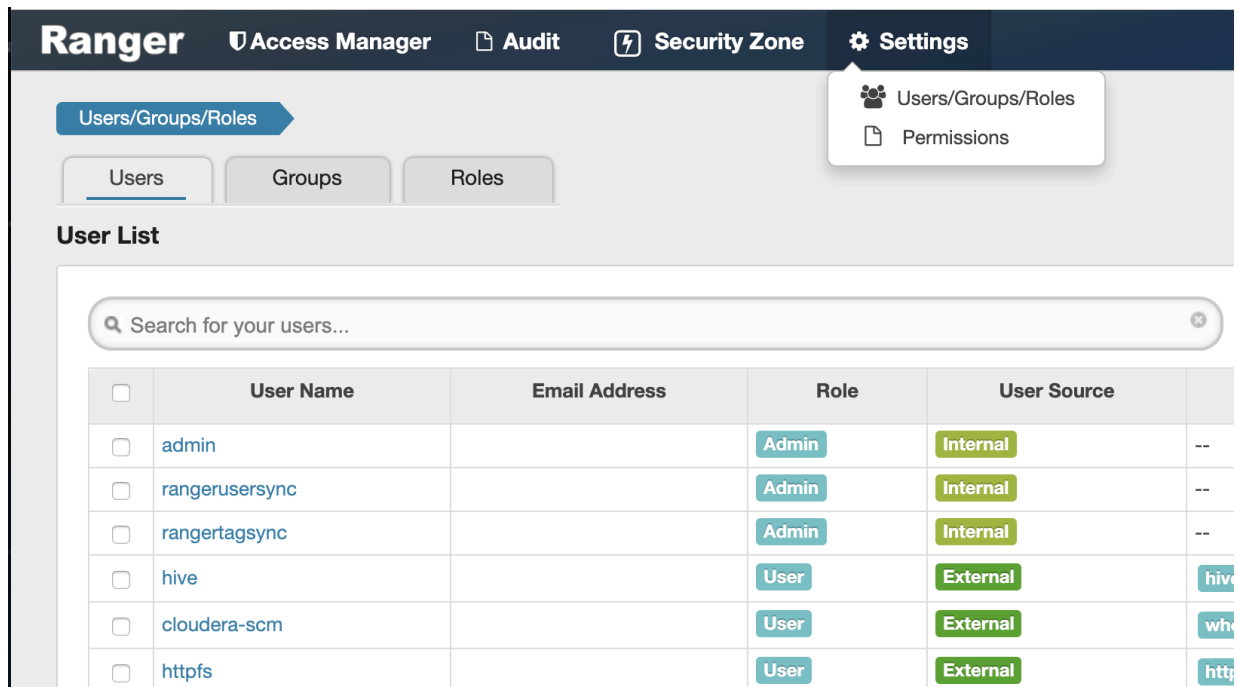




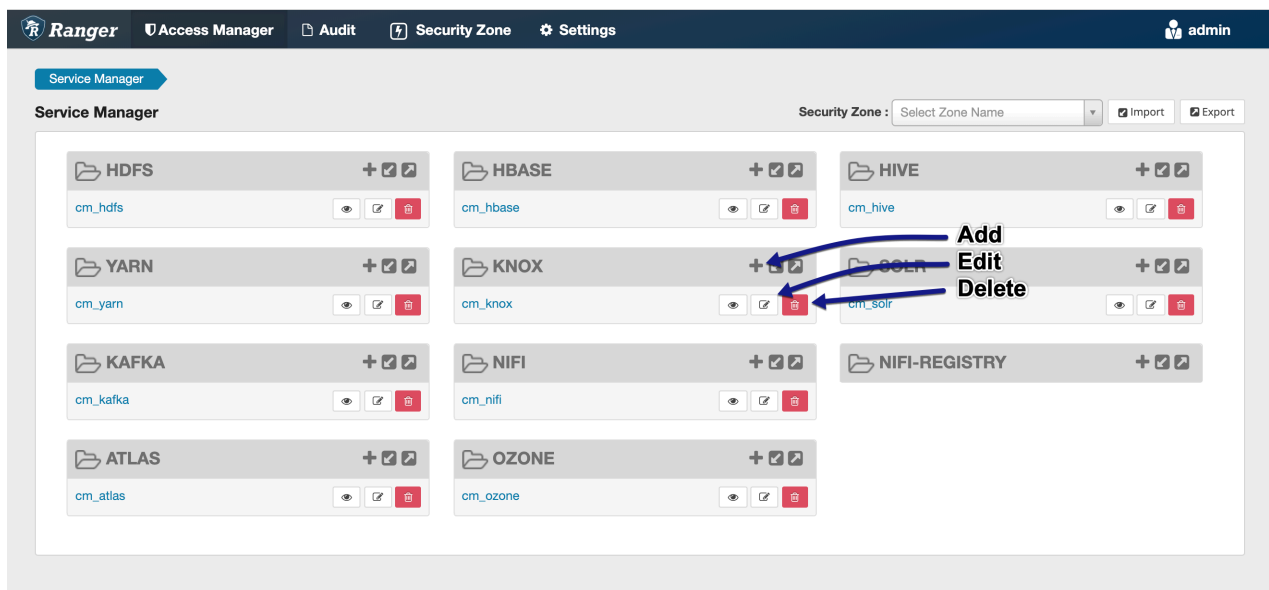
## Resource-based Services and Policies

Ranger enables you to configure resource-based services for Hadoop components (e.g. HBase, Kafka, Storm, etc.) and add access policies to those services.

### Configuring resource-based services

The Service Manager for Resource Based Policies page is displayed when you log in to the Ranger Console. You can also access this page by selecting Access Manager > Resource Based Policies. You can use this page to create services for Hadoop resources (HDFS, HBase, Hive, etc.) and add access policies to those resources.

- To add a new resource-based service, click the Add icon (  ) in the applicable box on the Service Manager page. Enter the required configuration settings, then click Add.
- To edit a resource-based service, click the Edit icon (  ) at the right of the service. Edit the service settings, then click Save to save your changes.
- To delete a resource-based service, click the Delete icon (  ) at the right of the service. Deleting a service also deletes all of the policies for that service.




### Configure a resource-based service: ADLS


How to add an ADLS service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to HDFS.

The Create Service page appears.

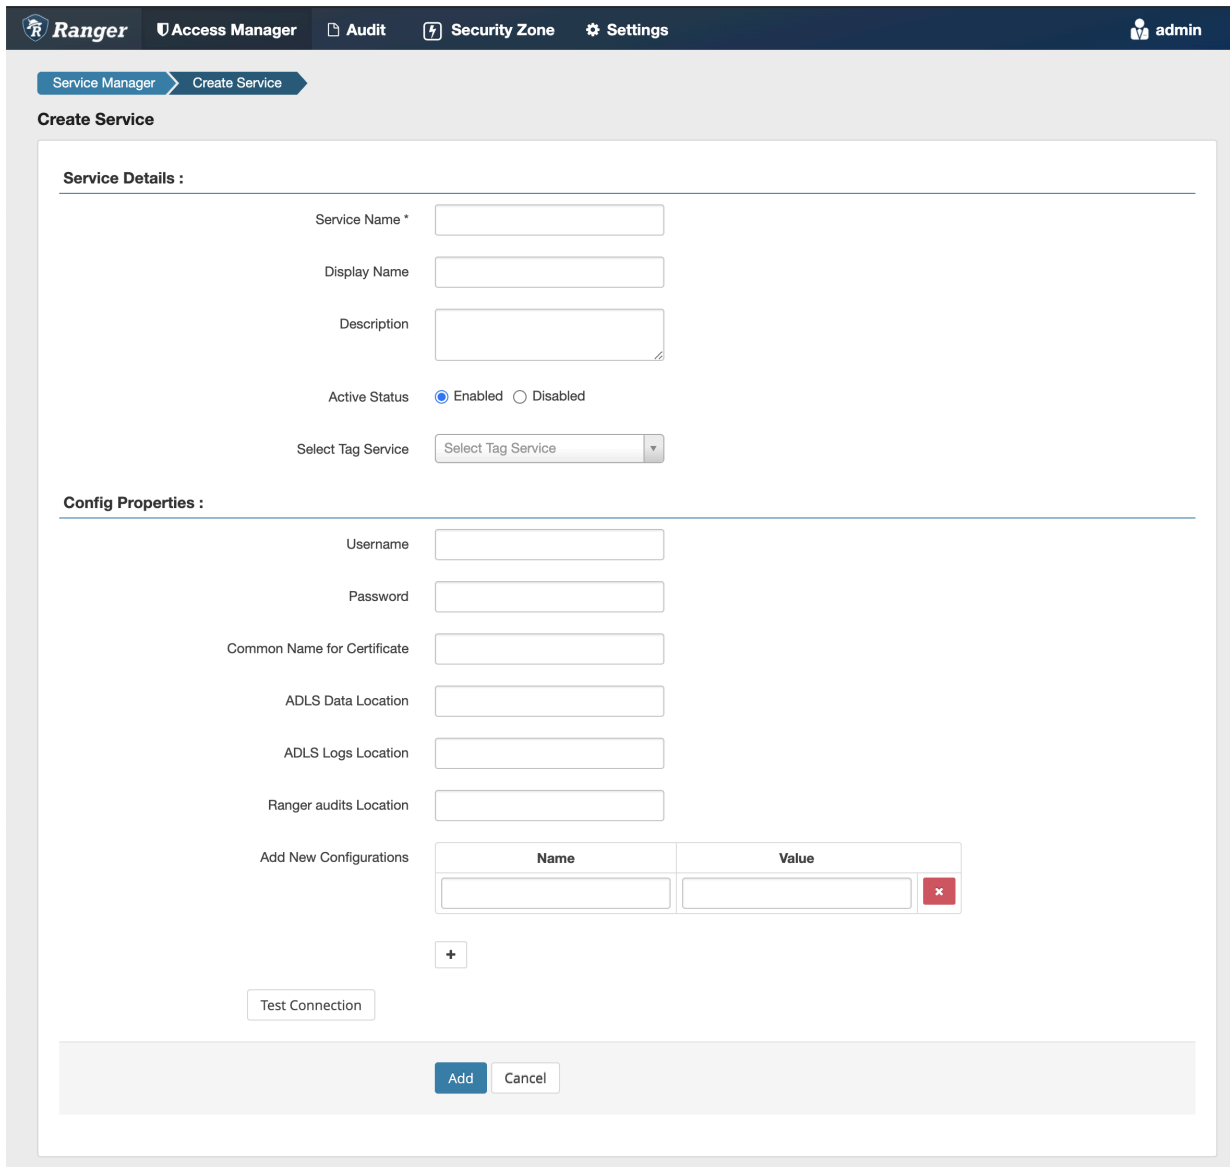

2. Enter the following information on the Create Service page:

**Table 1: Service Details**

Field name	Description
Service Name	The name of the service (required).
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to ADLS.

**Table 2: Configuration Properties**

Field name	Description
Username	The end system user name that can be used for connection.
Password	The password for the user name entered above.
Common Name For Certificate	The common name of the certificate.
ADLS Data Location	The path to the data storage location.
ADLS Logs Location	The path to the logs storage location.
Ranger Audits Location	The HDFS path to the Ranger audits storage location.
Add New Configurations	Add any other new configurations.

3. Click Test Connection.
4. Click Add.


### Configure a resource-based service: Atlas

How to add an Atlas service.




## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to Atlas.

The Create Service page appears.

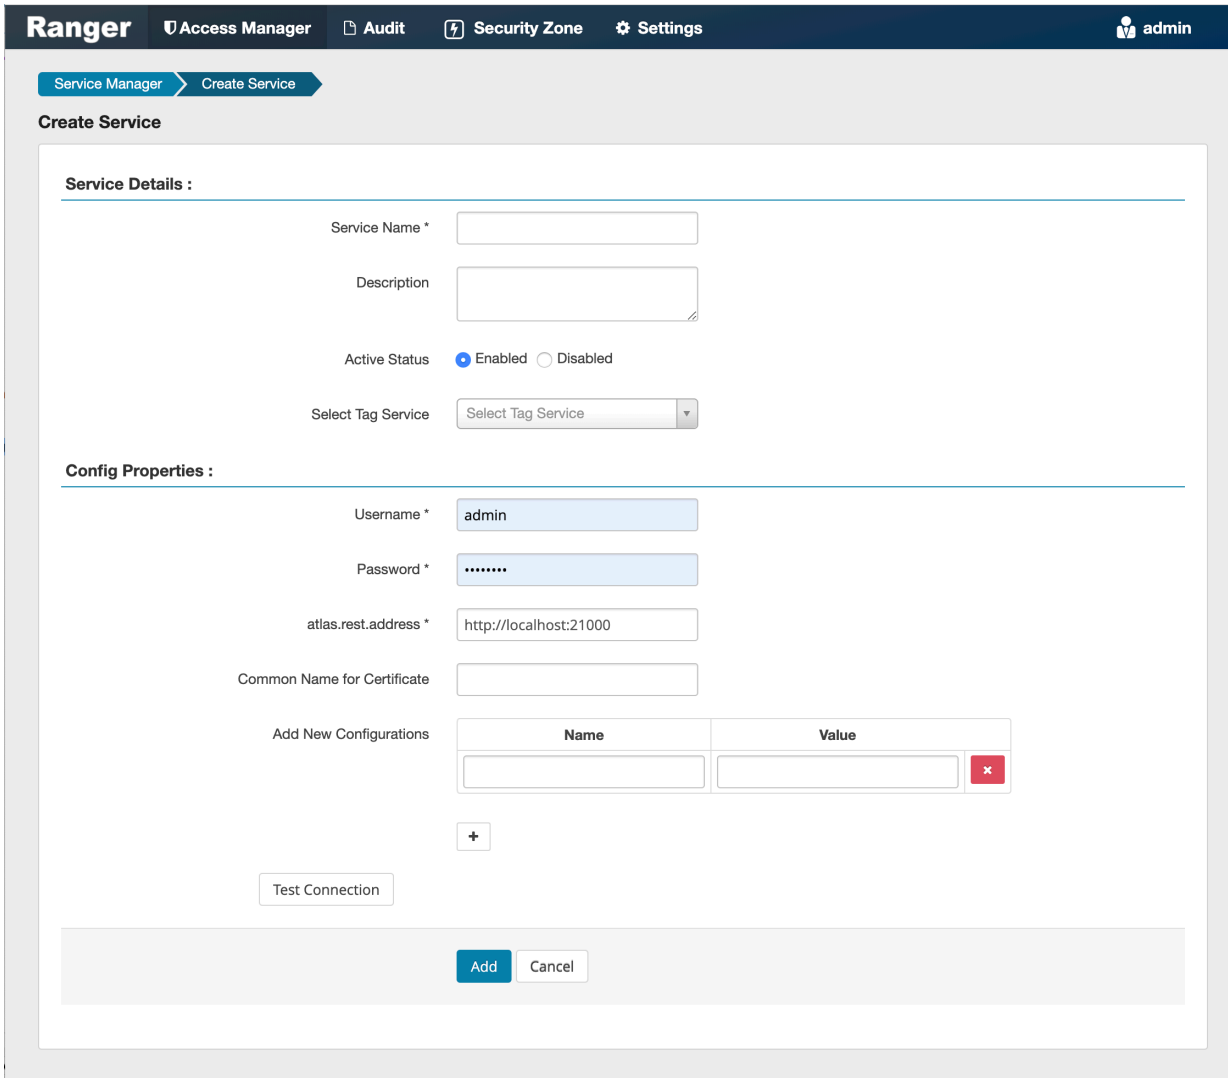

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > Create Service

**Create Service**

**Service Details :**

Service Name \*

Description

Active Status ☒ Enabled ☐ Disabled

Select Tag Service

**Config Properties :**

Username \*

Password \*

atlas.rest.address \*

Common Name for Certificate

Add New Configurations

Name	Value
<input type="text"/>	<input type="text"/>

2. Enter the following information on the Create Service page:

**Table 3: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to Atlas.

**Table 4: Configuration Properties**

Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
atlas.rest.address	Atlas host and port: : http://atlas_host_FQDN:21000.
Common Name For Certificate	The name of the certificate. This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).


3. Click Test Connection.
4. Click Add.


## Configure a resource-based service: HBase

How to add an HBase service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to HBase. The Create Service page appears.

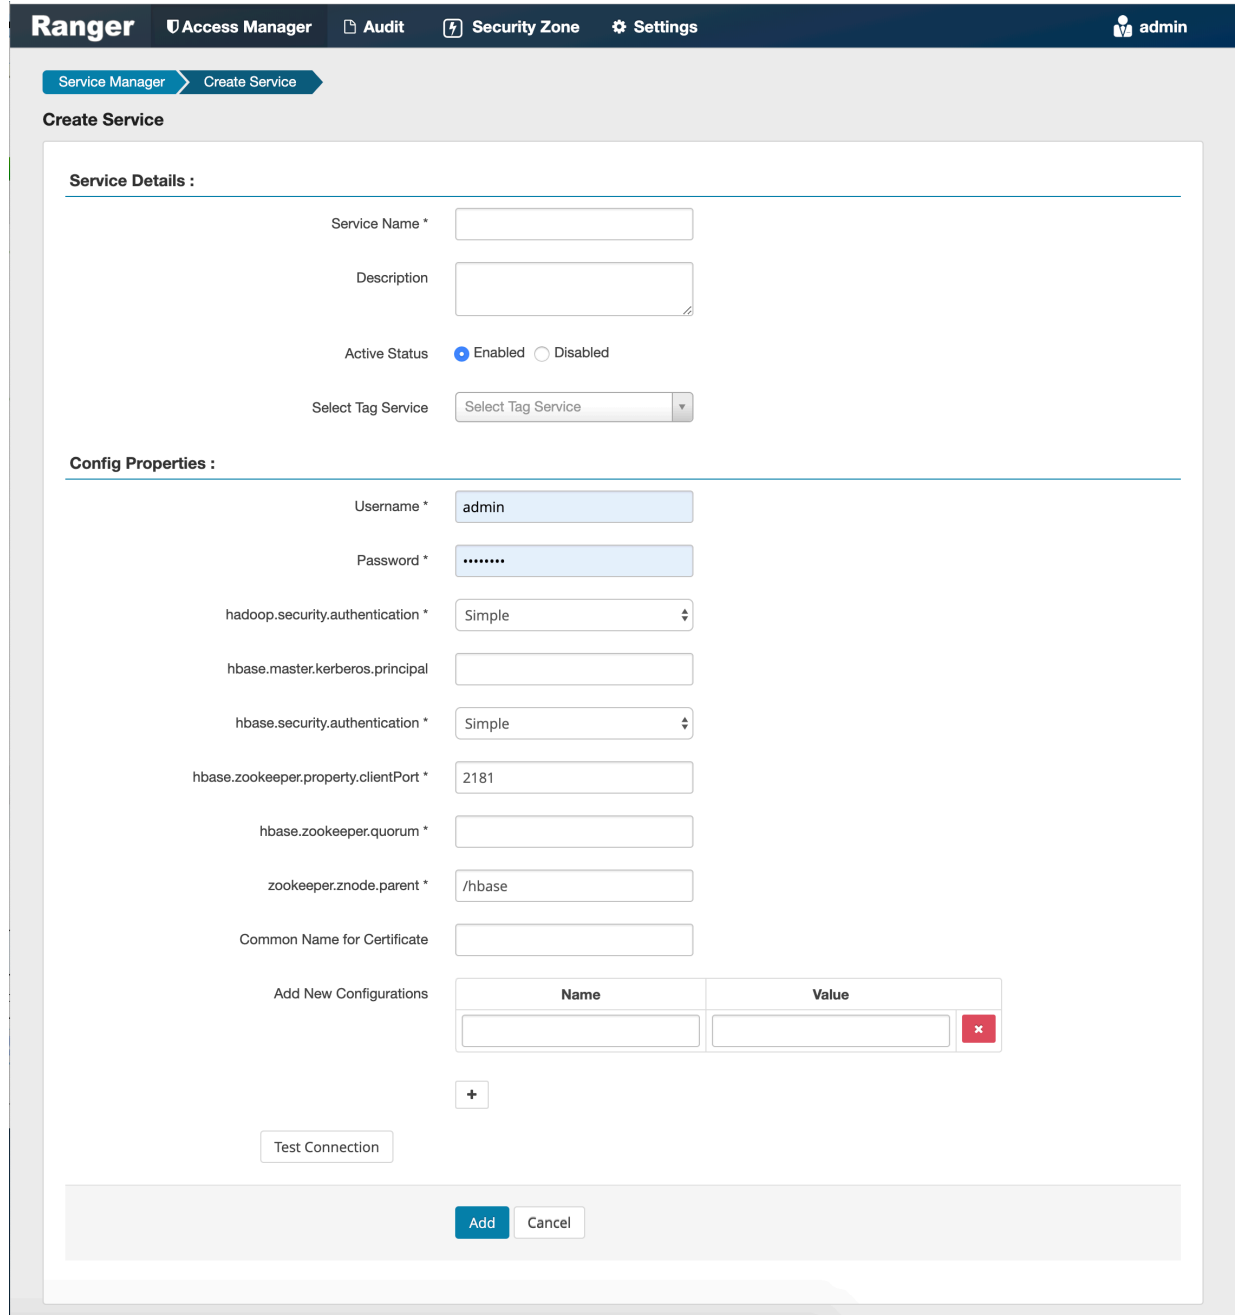

2. Enter the following information on the Create Service page:

**Table 5: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.

Field name	Description
Active Status	Enabled or Disabled.
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to HBase.

**Table 6: Configuration Properties**

Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
hadoop.security.authorization	The complete connection URL, including port and database name. (Default port: 10000.) For example, on the sandbox, jdbc:hive2://sandbox:10000/.
hbase.master.kerberos.principal	The Kerberos principal for the HBase Master. (Required only if Kerberos authentication is enabled.)
hbase.security.authentication	As noted in the hadoop configuration file hbase-site.xml.
hbase.zookeeper.property.clientPort	As noted in the hadoop configuration file hbase-site.xml.
hbase.zookeeper.quorum	As noted in the hadoop configuration file hbase-site.xml.
zookeeper.znode.parent	As noted in the hadoop configuration file hbase-site.xml.
Common Name for Certificate	The name of the certificate.  This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).


3. Click Test Connection.
4. Click Add.

## Configure a resource-based service: HDFS


How to add an HDFS service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to HDFS.

The Create Service page appears.

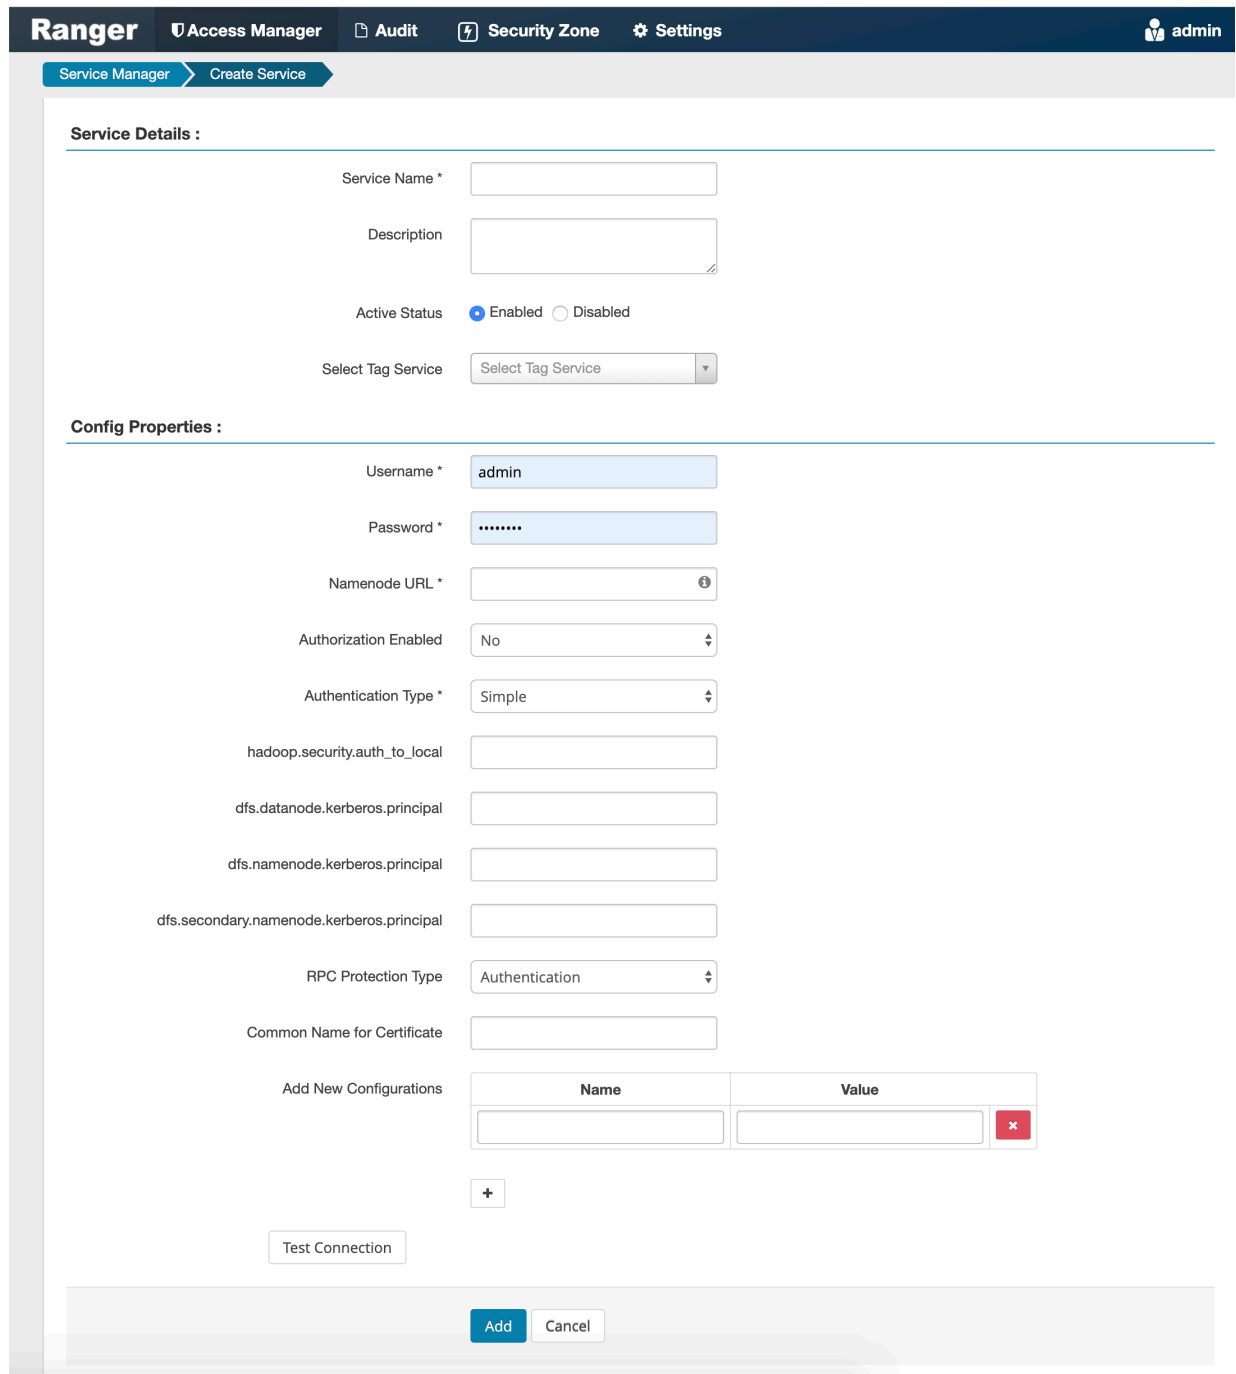

2. Enter the following information on the Create Service page:

**Table 7: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.

Field name	Description
Description	A description of the service.
Active Status	Enabled or Disabled.
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to HDFS.

**Table 8: Configuration Properties**

Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
NameNode URL	hdfs://NAMENODE_FQDN:8020 The location of the Hadoop HDFS service, as noted in the hadoop configuration file core-site.xml OR (if this is a HA environment) the path for the primary NameNode. This field was formerly named fs.defaultFS.
Authorization Enabled	Authorization involves restricting access to resources. If enabled, user need authorization credentials.
Authentication Type	The type of authorization in use, as noted in the hadoop configuration file core-site.xml; either simple or Kerberos. (Required only if authorization is enabled). This field was formerly named hadoop.security.authorization.
hadoop.security.auth_to_local	Maps the login credential to a username with Hadoop; use the value noted in the hadoop configuration file, core-site.xml.
dfs.datanode.kerberos.principal	The principal associated with the datanode where the service resides, as noted in the hadoop configuration file hdfs-site.xml. (Required only if Kerberos authentication is enabled).
dfs.namenode.kerberos.principal	The principal associated with the NameNode where the service resides, as noted in the hadoop configuration file hdfs-site.xml. (Required only if Kerberos authentication is enabled).
dfs.secondary.namenode.kerberos.principal	The principal associated with the secondary NameNode where the service resides, as noted in the hadoop configuration file hdfs-site.xml. (Required only if Kerberos authentication is enabled).
RPC Protection Type	Only authorised user can view, use, and contribute to a dataset. A list of protection values for secured SASL connections. Values: Authentication, Integrity, Privacy
Common Name For Certificate	The name of the certificate. This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).

3. Click Test Connection.


4. Click Add.

## Configure a resource-based service: Hive


How to add a Hive service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to Hive.

The Create Service page appears.

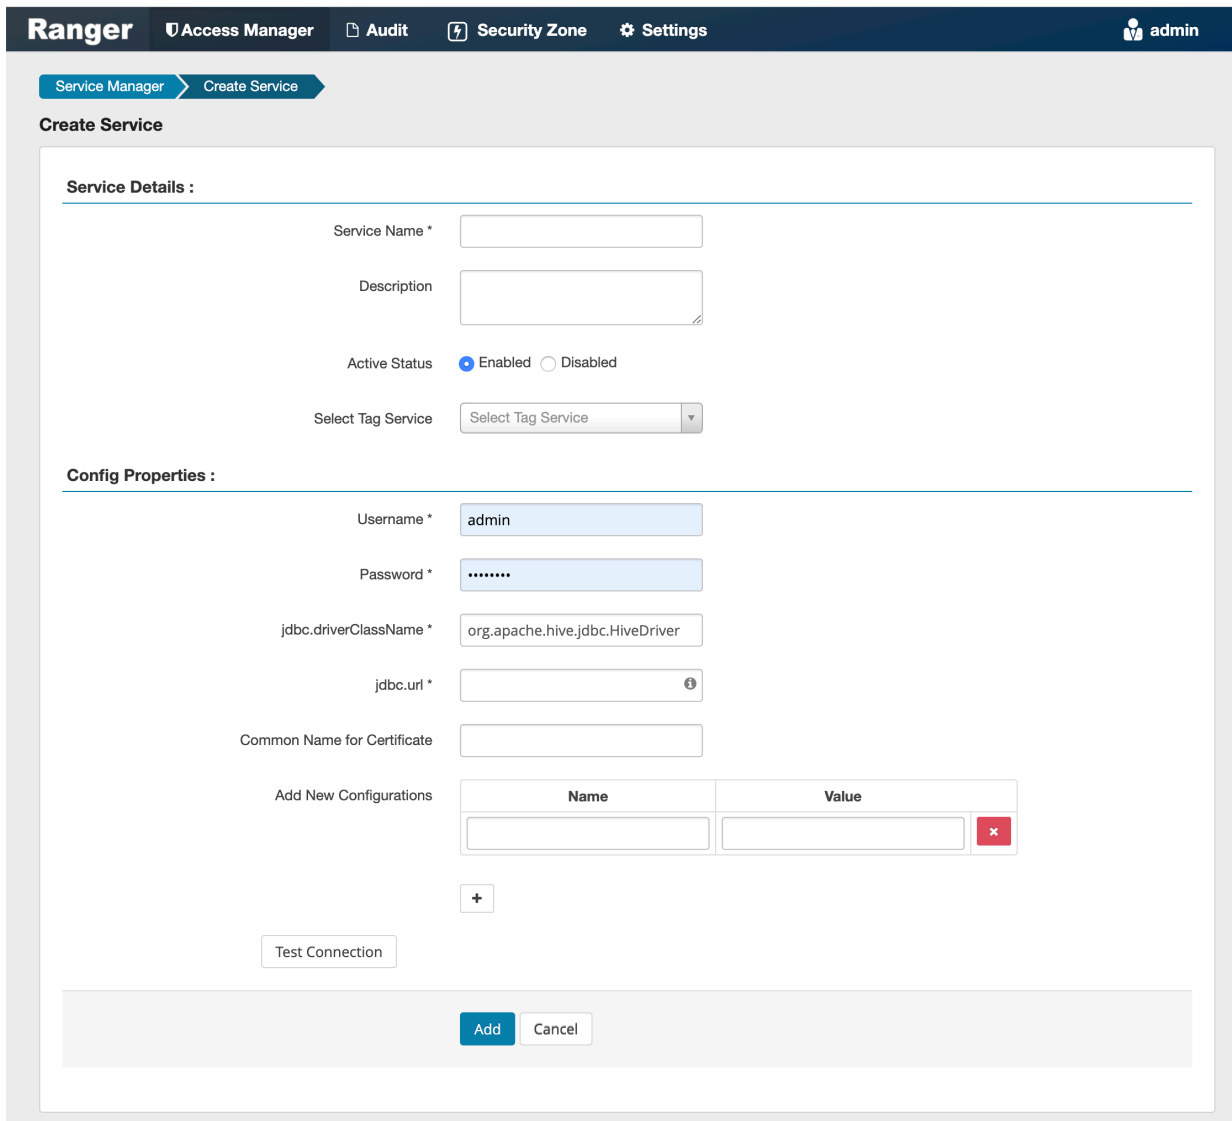

2. Enter the following information on the Create Service page:

**Table 9: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to Hive.

**Table 10: Configuration Properties**

Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
jdbc.driver ClassName	The full classname of the driver used for Hive connections. Default: org.apache.hive.jdbc.HiveDriver
jdbc.url	The complete connection URL, including port and database name. (Default port: 10000.) For example, on the sandbox, jdbc:hive2://sandbox:10000/.
Common Name For Certificate	The name of the certificate.  This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).

3. Click Test Connection.
4. Click Add.


## Configure a resource-based service: Kafka

How to add a Kafka service.




## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to Kafka.

The Create Service page appears.

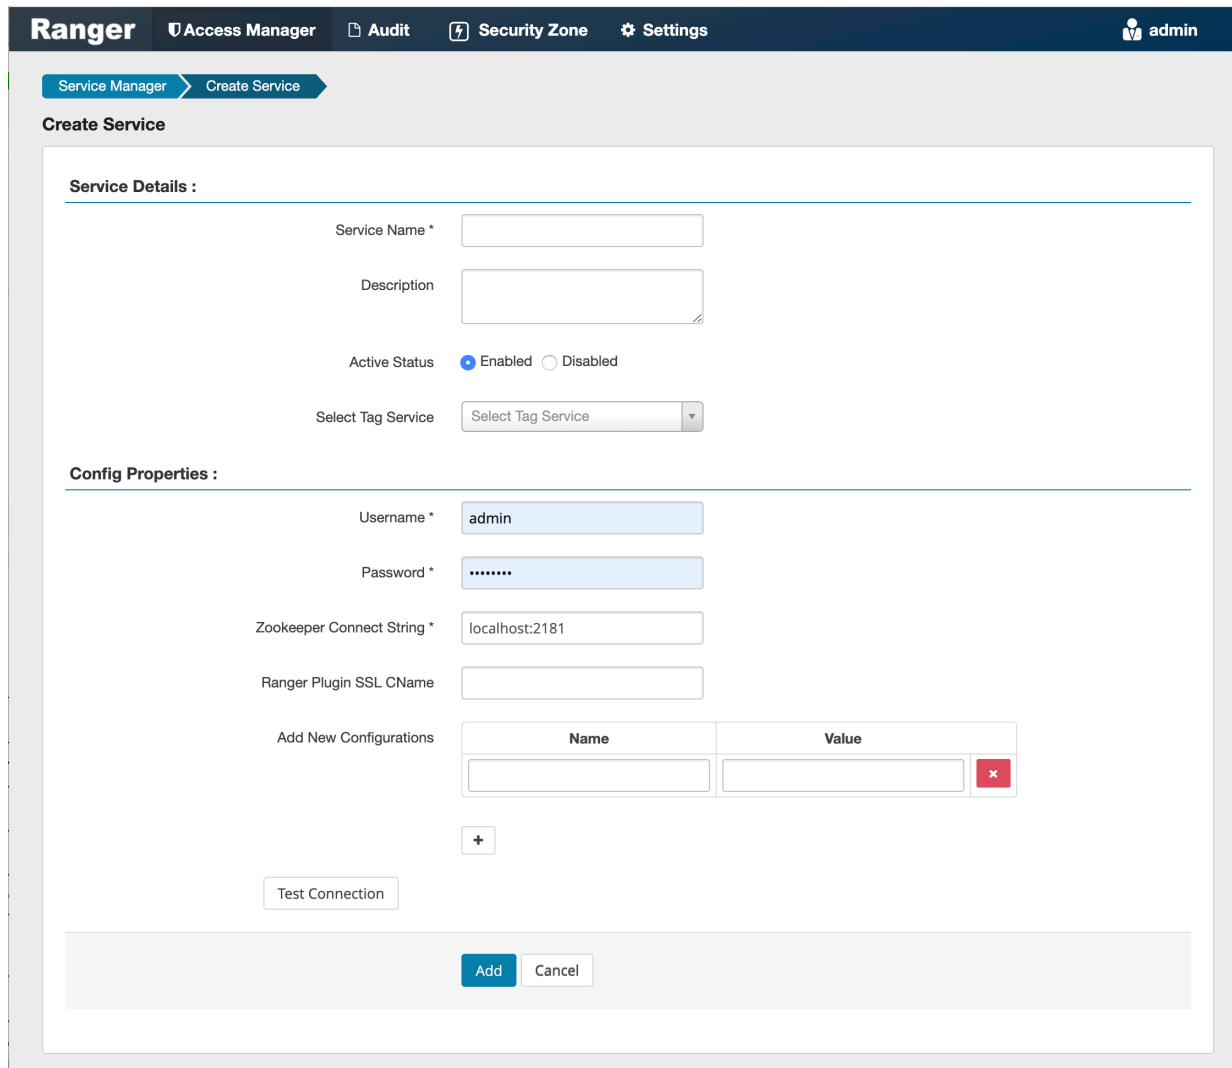

2. Enter the following information on the Create Service page:

**Table 11: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to Kafka.

**Table 12: Configuration Properties**

Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
ZooKeeper Connect String	Defaults to localhost:2181 (Provide FQDN of zookeeper host : 2181).
Ranger Plugin SSL CName	Provide common.name.for.certificate which is registered with Ranger (in Wire Encryption environment).  This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).


3. Click Test Connection.
4. Click Add.

## Configure a resource-based service: Knox


How to add a Knox service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to Knox.

The Create Service page appears.

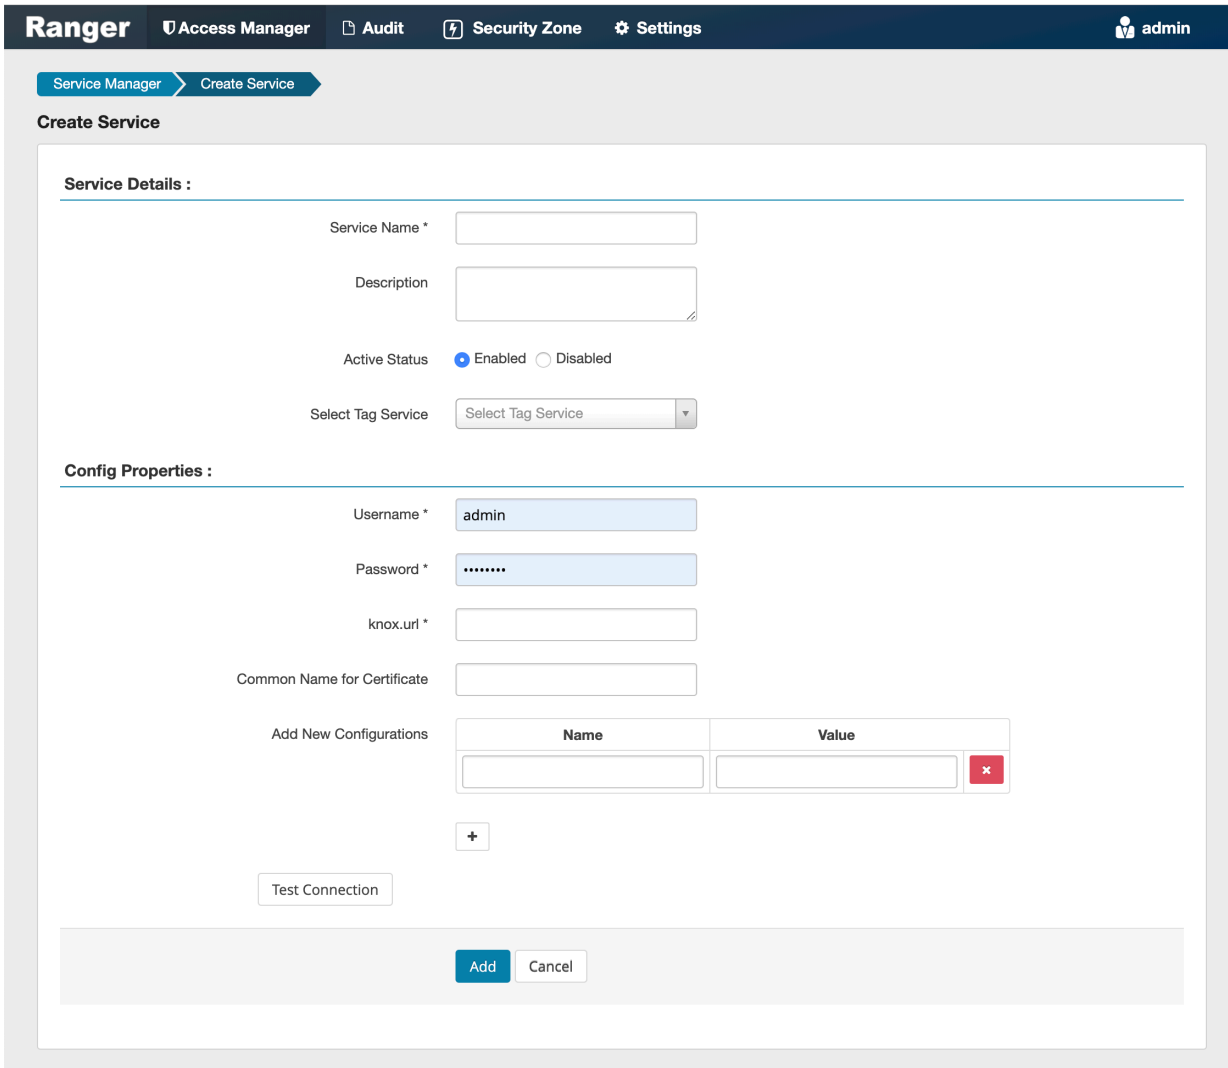

2. Enter the following information on the Create Service page:

**Table 13: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to Knox.

**Table 14: Configuration Properties**

Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
knox.url	The Gateway URL for Knox.
Common Name For Certificate	The name of the certificate. This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).


3. Click Test Connection.
4. Click Add.


## Configure a resource-based service: NiFi

How to add a NiFi service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to NiFi. The Create Service page appears.

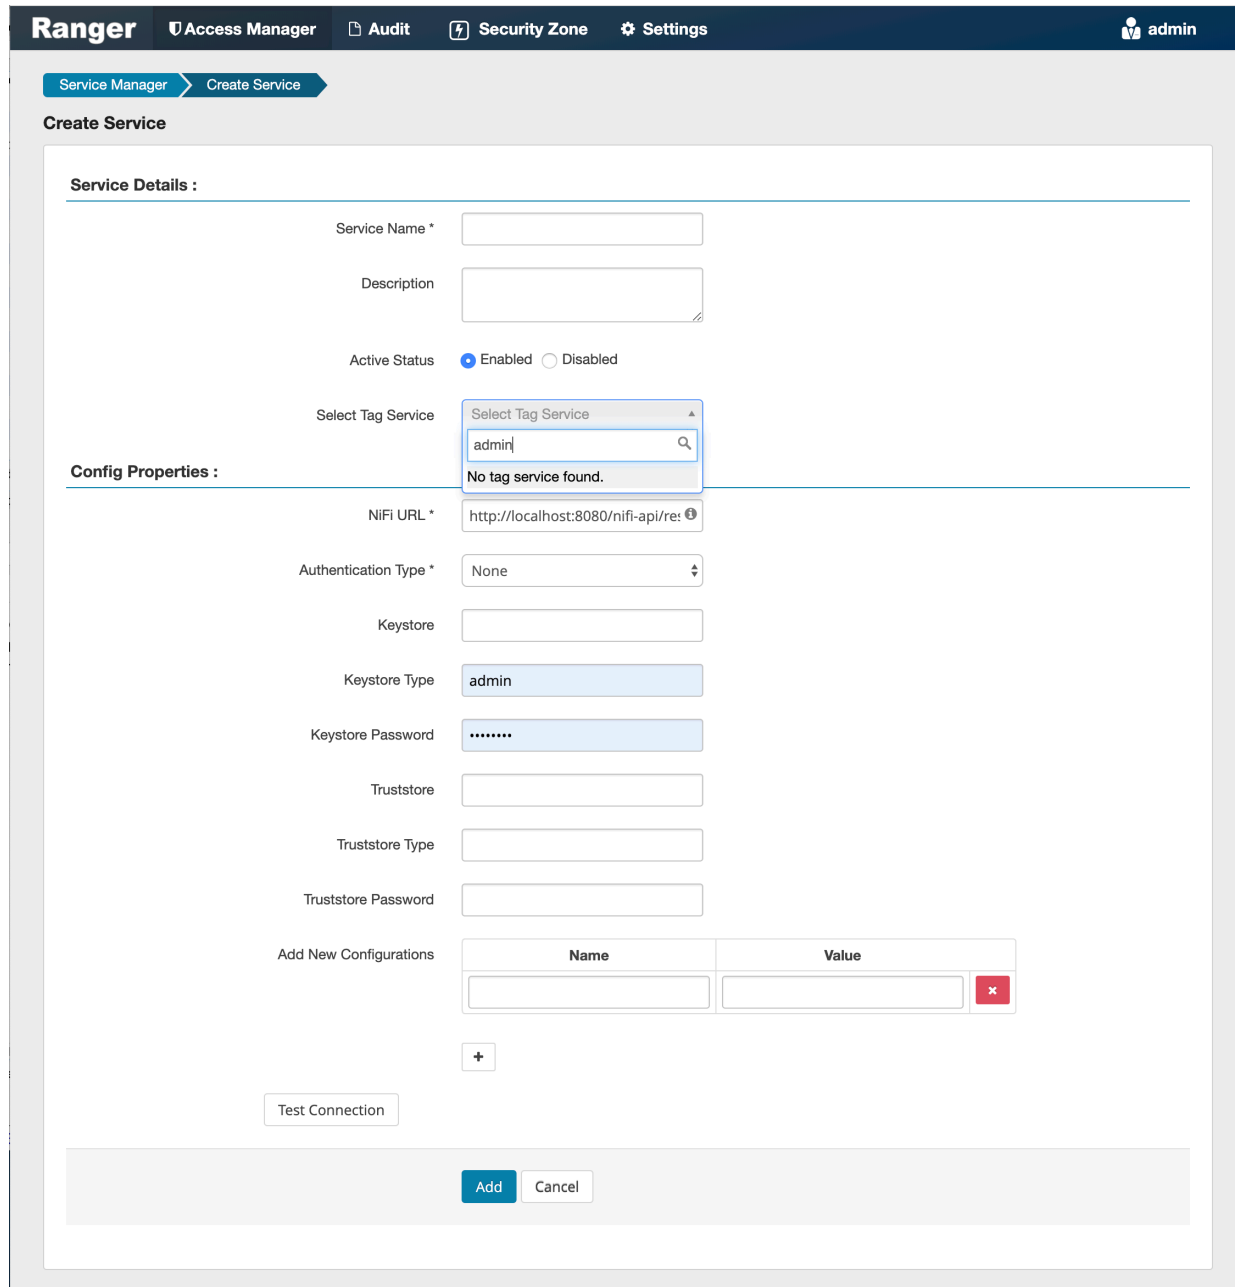

2. Enter the following information on the Create Service page:

**Table 15: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to NiFi.

**Table 16: Configuration Properties**

Field name	Description
NiFi URL	The complete NiFi host URL.
Authentication Type	None or SSL.
Keystore	The keystore to use when Ranger makes an https connection to NiFi. This keystore contains the certificate that represents the Ranger server.
Keystore Type	The keystore type (JKS or PKCS12).
Keystore Password	The keystore password.
Truststore	The truststore to use when Ranger makes an https connection to NiFi. This truststore contains the public key of the certificate authority that signed the NiFi server certificates.
Truststore Type	The truststore type (JKS or PKCS12).
Truststore Password	The truststore password.
Add New Configurations	Add any other new configuration(s).


3. Click Test Connection.
4. Click Add.


## Configure a resource-based service: NiFi Registry

How to add a NiFi Registry service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to NiFi Registry. The Create Service page appears.

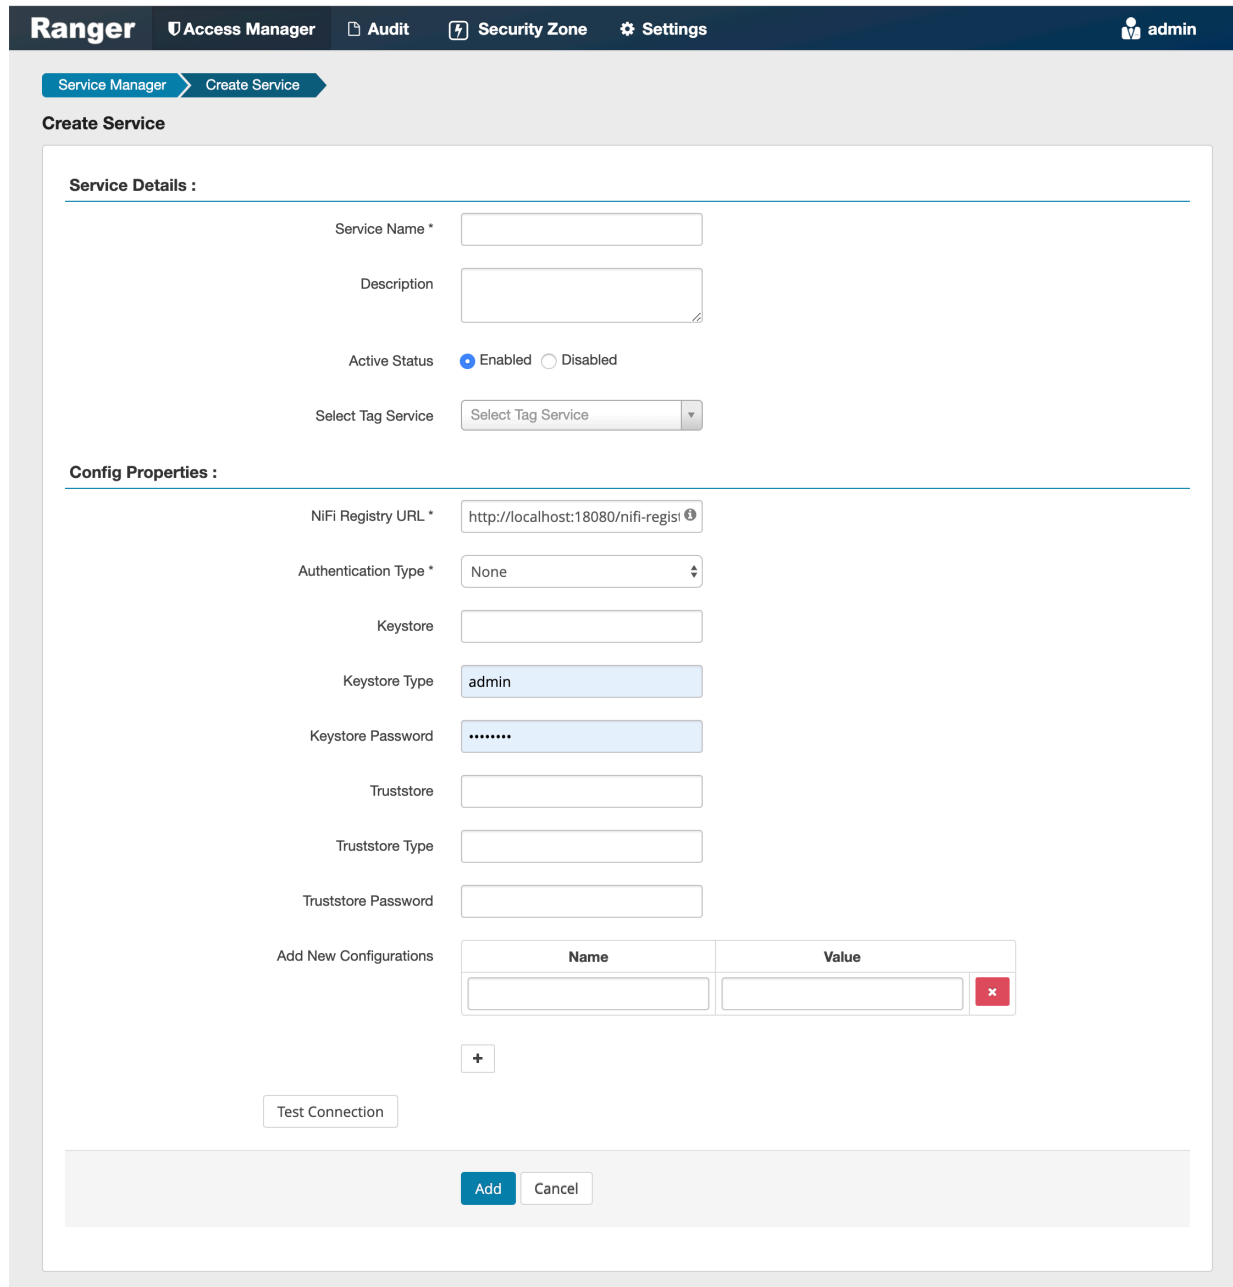

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > Create Service

**Create Service**

**Service Details :**

Service Name \*

Description

Active Status ☒ Enabled ☐ Disabled

Select Tag Service

**Config Properties :**

NiFi Registry URL \*

Authentication Type \*

Keystore

Keystore Type

Keystore Password

Truststore

Truststore Type

Truststore Password

Add New Configurations

Name	Value
<input type="text"/>	<input type="text"/>

2. Enter the following information on the Create Service page:

**Table 17: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to NiFi.

**Table 18: Configuration Properties**

Field name	Description
NiFi Registry URL	The complete NiFi Registry URL.
Authentication Type	None or SSL.
Keystore	The keystore to use when Ranger makes an https connection to the NiFi Registry. This keystore contains the certificate that represents the Ranger server.
Keystore Type	The keystore type (JKS or PKCS12).
Keystore Password	The keystore password.
Truststore	The truststore to use when Ranger makes an https connection to the NiFi Registry. This truststore contains the public key of the certificate authority that signed the NiFi server certificates.
Truststore Type	The truststore type (JKS or PKCS12).
Truststore Password	The truststore password.
Add New Configurations	Add any other new configuration(s).

3. Click Test Connection.
4. Click Add.

## Configure a resource-based service: S3

How to add an Amazon S3 service.




## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to S3.

The Create Service page appears.

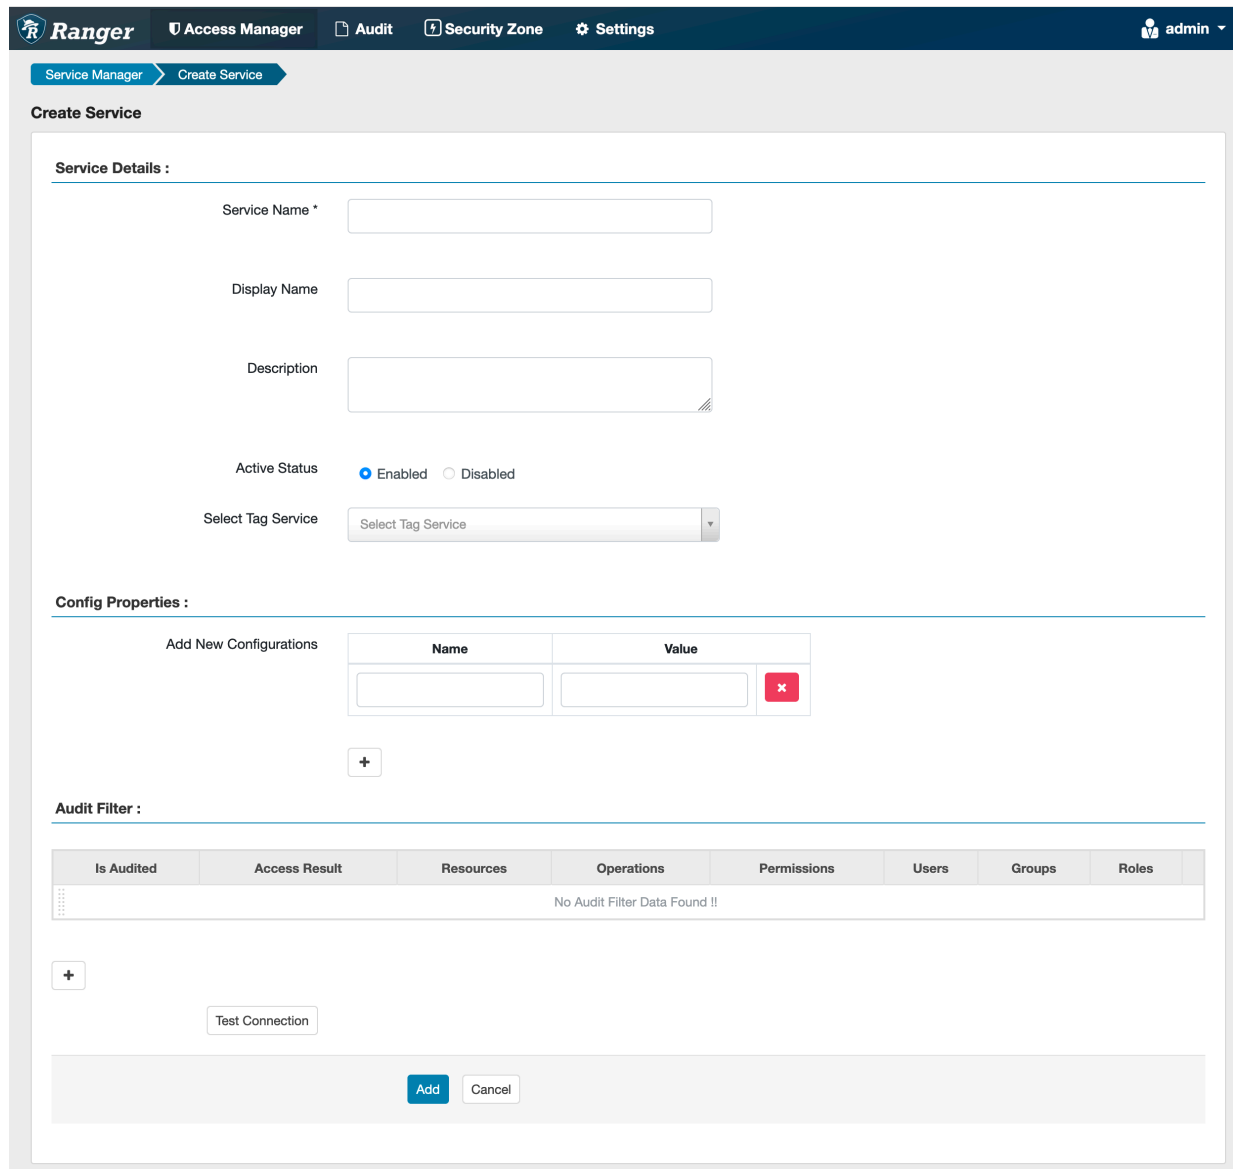

2. Enter the following information on the Create Service page:

**Table 19: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Display Name	An optional display name for the service.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to S3.

**Table 20: Configuration Properties**


Field name	Description
Add New Configurations	Add any other new configuration(s).


3. Click Test Connection.
4. Click Add.

## Configure a resource-based service: Solr

How to add a Solr service.

### Procedure

1. On the Service Manager page, click the Add icon (  ) next to Solr.  
The Create Service page appears.

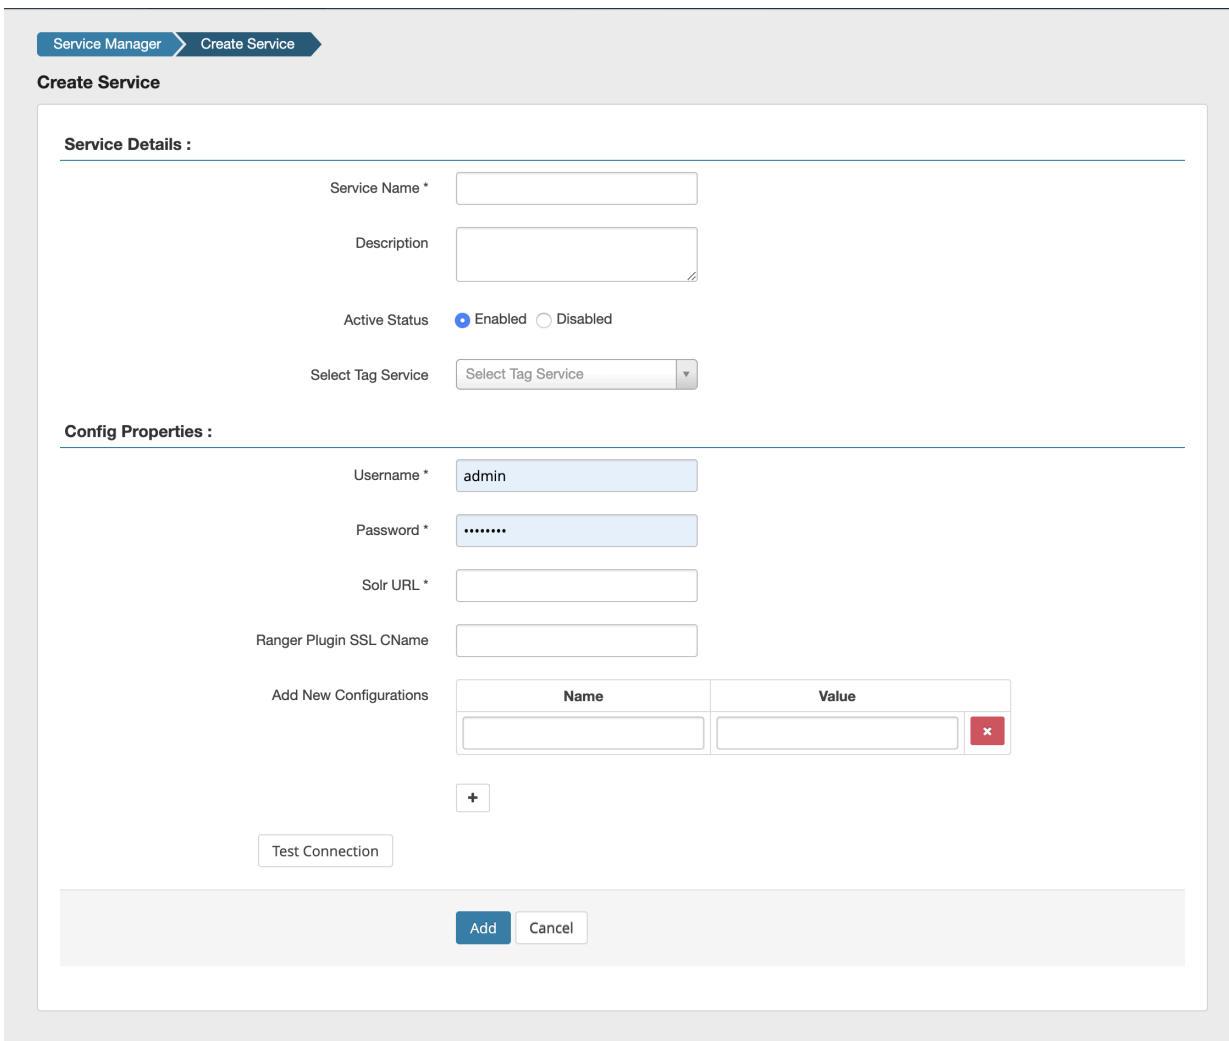

Service Manager > Create Service

**Create Service**

**Service Details :**

Service Name \*

Description

Active Status ☒ Enabled ☐ Disabled

Select Tag Service

**Config Properties :**

Username \*

Password \*

Solr URL \*

Ranger Plugin SSL CName

Add New Configurations

Name	Value
<input type="text"/>	<input type="text"/>

2. Enter the following information on the Create Service page:

**Table 21: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to Solr.

**Table 22: Configuration Properties**

Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
Solr URL	http://Solr_host:8983
Ranger Plugin SSL CName	Provide common.name.for.certificate which is registered with Ranger (in Wire Encryption environment).  This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).


3. Click Test Connection.
4. Click Add.

## Configure a resource-based service: YARN


How to add a YARN service.

## Procedure

1.

On the Service Manager page, click the Add icon (  ) next to YARN.

The Create Service page appears.

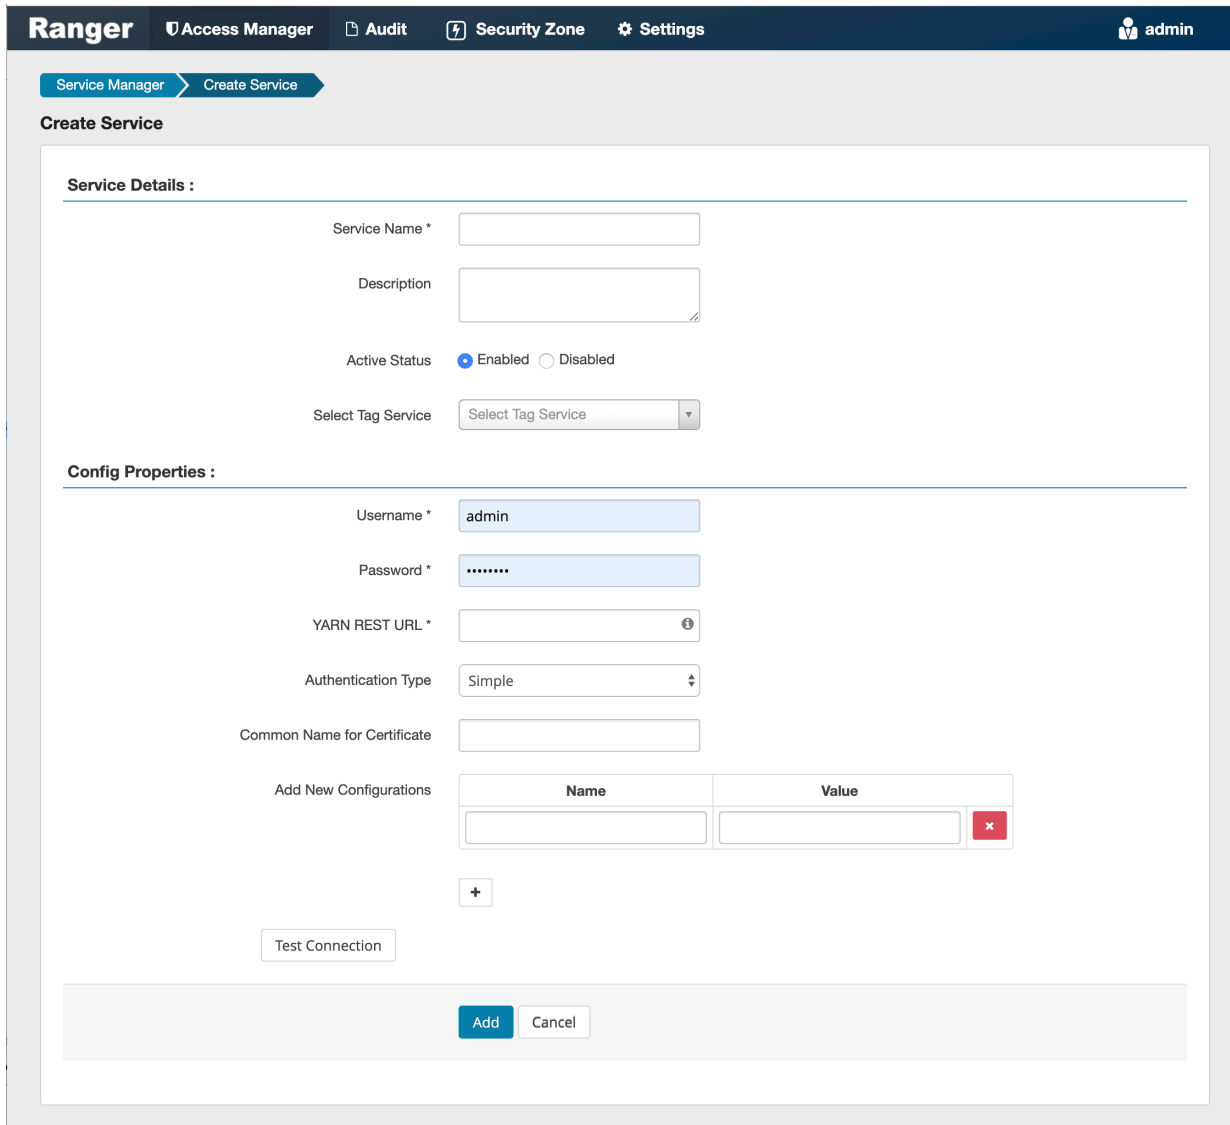

2. Enter the following information on the Create Service page:

**Table 23: Service Details**

Field name	Description
Service Name	The name of the service; required when configuring agents.
Description	A description of the service.
Active Status	Enabled or Disabled.

Field name	Description
Select Tag Service	Select a tag-based service to apply the service and its tag-based policies to YARN.



**Table 24: Configuration Properties**


Field name	Description
Username	The end system username that can be used for connection.
Password	The password for the username entered above.
YARN REST URL	Http or https://RESOURCEMANAGER_FQDN:8088.
Authentication Type	The type of authorization in use, as noted in the hadoop configuration file core-site.xml; either simple or Kerberos. (Required only if authorization is enabled). This field was formerly named hadoop.security.authorization.
Common Name For Certificate	The name of the certificate. This field is interchangeably named Common Name For Certificate and Ranger Plugin SSL CName in Create Service pages.
Add New Configurations	Add any other new configuration(s).

3. Click Test Connection.
4. Click Add.

## Configuring resource-based policies

To view the policies associated with a service, click the service name on the Resource Based Policies Service Manager page. The policies for that service will be displayed in a list, along with a search box.

- To add a new resource-based policy to the service, click Add New Policy.
- To edit a resource-based policy, click the Edit icon () for the service. Edit the policy settings, then click Save to save your changes.
- To delete a resource-based policy, click the Delete icon () for the service.

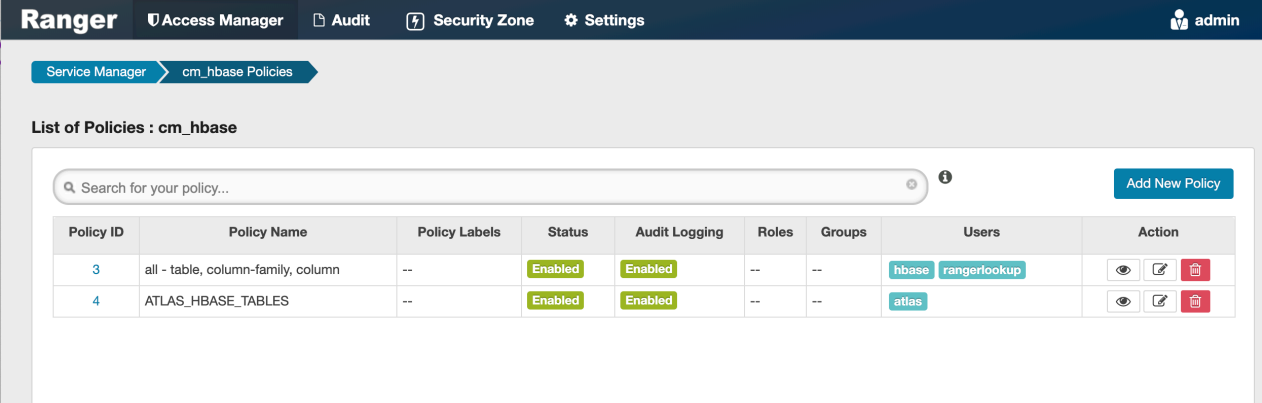







**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager cm\_hbase Policies

List of Policies : cm\_hbase

Search for your policy...

Add New Policy

Policy ID	Policy Name	Policy Labels	Status	Audit Logging	Roles	Groups	Users	Action
3	all - table, column-family, column	--	Enabled	Enabled	--	--	hbase rangerlookup	  
4	ATLAS_HBASE_TABLES	--	Enabled	Enabled	--	--	atlas	  

### Related Information

[Importing and exporting resource-based policies](#)

## Configure a resource-based policy: ADLS

How to add a new policy to an ADLS service.

### Procedure

1. On the Service Manager page, select an ADLS service.

The List of Policies page appears.

2. Click Add New Policy.

The Create Policy page appears.

**Create Policy**

**Policy Details :**

Policy Type: **Access** ⓘ enabled normal ⌚ Add Validity Period

Policy Name \*

Policy Label

Storage Account \*

Storage Account Container \*

Relative Path \*  recursive

Description

Audit Logging **YES**

**add/edit permissions**

- ☐ Read
- ☐ Write
- ☐ Execute
- ☐ Delete
- ☐ Delete Recursive
- ☐ List
- ☐ Move
- ☐ Modify Permissions
- ☐ Modify Ownership
- ☐ Select/Deselect All

**Allow Conditions :**

Select Role	Select Group	Select User	gate Admin
Select Roles	Select Groups	Select Users	<input type="checkbox"/>
Add Permissions			<input type="checkbox"/>

3. Complete the Create Policy page as follows:

**Table 25: Policy Details**

Field	Description
Policy Name	Enter a unique policy name.
Active status	Enabled or Disabled.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.

Field	Description
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.
Storage Account	Specify the Azure storage account.
Storage Account Container	Specify the Azure storage account container.
Relative Path	Define the relative path for the policy folder/file. The default recursive setting specifies that the resource path is recursive; you can also specify a non-recursive path.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Add Validity Period	Specify a start and end time for the policy.

**Table 26: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: Read, Write, Execute, Delete, Delete Recursive, List, Move, Modify Permissions, Modify Ownership, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

4. You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
5. You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
6. Click Add.

## Configure a resource-based policy: Atlas

How to add a new policy to an existing Atlas service.

### Procedure

1. On the Service Manager page, select an existing Atlas service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 27: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
type-category	Select type-category, entity-type, atlas-service, or relationship-type.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.



Field	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 28: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: Create Type, Update Type, Delete Type, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

4. You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
5. You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
6. Click Add.

**Related Information**

[Wildcards and variables in resource-based policies](#)

**Configure a resource-based policy: HBase**

How to add a new policy to an existing HBase service.

**Procedure**

1. On the Service Manager page, select an existing HBase service.  
The List of Policies page appears.

2. Click Add New Policy.

The Create Policy page appears.

**Policy Details :**

Policy Type: **Access** Add Validity Period

Policy Name \*  enabled normal

Policy Label

HBase Table \*  include

HBase Column-family \*  include

HBase Column \*  include

Description

Audit Logging **YES**

**Allow Conditions :** hide ^

Select Role	Select Group	Select User	Permissions	Delegate Admin	
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="Select Users"/>	<span>Add Permissions</span> <span>+</span>	<input type="checkbox"/>	<span>×</span>

+

3. Complete the Create Policy page as follows:

**Table 29: Policy Details**

Label	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
HBase Table	Select the appropriate database. Multiple databases can be selected for a particular policy. This field is mandatory.
HBase Column-family	For the selected table, specify the column families to which the policy applies.
HBase Column	For the selected table and column families, specify the columns to which the policy applies.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.

Label	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 30: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies. To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies. To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy. The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies. To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: Read, Write, Create, Admin, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

4. You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
5. You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
6. Click Add.

### What to do next

Provide User Access to HBase Database Tables from the Command Line

HBase provides the means to manage user access to HBase database tables directly from the command line. The most commonly-used commands are:

- GRANT

Syntax:

```
grant '<user-or-group>', '<permissions>', '<table>'
```

For example, to create a policy that grants user1 read/write permission on the table usertable, the command would be:

```
grant 'user1', 'RW', 'usertable'
```

The syntax is the same for granting CREATE and ADMIN rights.

- REVOKE

Syntax:

```
revoke '<user-or-group>', '<usertable>'
```

For example, to revoke the read/write access of user1 to the table usertable, the command would be:

```
revoke 'user1', 'usertable'
```



**Note:**

Unlike Hive, HBase has no specific revoke commands for each user privilege.

**Related Information**

[Wildcards and variables in resource-based policies](#)

## Configure a resource-based policy: HDFS

How to add a new policy to an existing HDFS service.

### About this task

Through configuration, Apache Ranger enables both Ranger policies and HDFS permissions to be checked for a user request. When the NameNode receives a user request, the Ranger plugin checks for policies set through the Ranger Service Manager. If there are no policies, the Ranger plugin checks for permissions set in HDFS.

We recommend that permissions be created at the Ranger Service Manager, and to have restrictive permissions at the HDFS level.

### Procedure

1. On the Service Manager page, select an existing HDFS service.

The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 31: Policy Details**

Field	Description
Policy Name	Enter a unique name for this policy. The name cannot be duplicated anywhere in the system.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Resource Path	Define the resource path for the policy folder/file. The default recursive setting specifies that the resource path is recursive; you can also specify a non-recursive path.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.

Field	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 32: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: Read, Write, Execute, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

- You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
- You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
- Click Add.

**Related Information**

[Wildcards and variables in resource-based policies](#)

**Configure a resource-based policy: HadoopSQL**

How to add a new policy to an existing Hive service.

**Procedure**

- On the Service Manager page, select an existing HadoopSQL service.

The List of Policies page appears.



**Note:** Service\_name remains cm\_hive. Display name is HadoopSQL.

2. Click Add New Policy.

The Create Policy page appears.

The screenshot displays the 'Create Policy' interface in the Ranger Access Manager. The top navigation bar includes 'Service Manager', 'Hadoop SQL Policies', and 'Create Policy'. The 'Policy Details' section contains the following elements:

- Policy Type:** Set to 'Access'.
- Policy Name:** A text input field with a dropdown arrow.
- Policy Label:** A text input field containing 'Policy Label'.
- database:** A dropdown menu with a text input field and an 'Include' toggle.
- table:** A dropdown menu with a text input field and an 'Include' toggle.
- column:** A dropdown menu with a text input field and an 'Include' toggle.
- Description:** A text area for policy description.
- Audit Logging:** A toggle switch set to 'Yes'.

An 'add/edit permissions' modal is open, listing various permissions with checkboxes:

- select
- update
- Create
- Drop
- Alter
- Index
- Lock
- All
- Read
- Write
- ReplAdmin
- Service Admin
- Temporary UDF Admin
- Refresh
- RW Storage
- Select/Deselect All

The 'Allow Conditions' section at the bottom features three input fields: 'Select Role', 'Select Group', and 'Select Users'. A table on the right side of the page shows 'Permissions', 'Delegate Admin', and 'Add Permissions' buttons.

3. Complete the Create Policy page as follows:

**Table 33: Policy Details**


Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory. The policy is enabled by default.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Database	Type in the applicable database name. The autocomplete feature displays available databases based on the entered text. Include is selected by default to allow access. Select Exclude to deny access..

Field	Description
table/udf	<p>Specifies a table-based or UDF-based policy.</p> <p>Select table or udf, then type in the applicable table or UDF name. The autocomplete feature displays available tables based on the entered text.</p> <p>Include is selected by default to allow access. Select Exclude to deny access.</p>
column	<p>Type in the applicable column name. The autocomplete feature displays available columns based on the entered text.</p> <p>Include is selected by default to allow access. Select Exclude to deny access.</p>
URL	<p>Specify the cloud storage path (for example s3a://dev-admin/demo/campaigns.txt) where the end-user permission is needed to read/write the Hive data from/to a cloud storage path.</p> <p>Permissions: READ operation on the URL permits the user to perform HiveServer2 operations which use S3 as data source for Hive tables. WRITE operation on the URL permits the user to perform HiveServer2 operations which write data to the specified S3 location.</p>
URI	<p>Hive INSERT OVERWRITE queries require a Ranger URI policy to allow write operations, even if the user has write privilege granted through HDFS policy.</p> <p>Failure to specify this field will result in the following error: Error while compiling statement: FAILED: HiveAccessControlException Permission denied: user [jdoe] does not have [WRITE] privilege on [/tmp/*] (state=42000,code=40000)</p> <p>Example value: /tmp/*</p>
Description	(Optional) Describe the purpose of the policy.
Hive Service Name	<p>hiveservice is used only in conjunction with Permissions=Service Admin. Enables a user who has Service Admin permission in Ranger to run the kill query API: kill query &lt;queryID&gt; . Supported value: *. (Required)</p>
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.
Add Validity Period	Specify a start and end time for the policy.

**Table 34: Allow Conditions**

Label	Description
Select Role	<p>Specify the roles to which this policy applies.</p> <p>To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.</p>



Label	Description
Select Group	<p>Specify the groups to which this policy applies.</p> <p>To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.</p> <p>The public group contains all users, so granting access to the public group grants access to all users.</p> <p> <b>Note:</b> Users have Select permission on Hive tables (only) by default. If you want to use Spark to access Hive tables, you must :</p> <ul style="list-style-type: none"> <li>grant database-only, Select permission for the table's database to let Spark access table data</li> </ul>
Select User	<p>Specify the users to which this policy applies.</p> <p>To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.</p>
Permissions	<p>Add or edit permissions: Select, Update, Create, Drop, Alter, Index, Lock, All, ReplAdmin, Service Admin, Temp UDF Admin, Refresh, RW Storage, Select/Deselect All.</p> <p>Service Admin is used in conjunction with Hive Service Name and the kill query API: kill query &lt;queryID&gt; .</p>
Delegate Admin	<p>You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.</p>

- You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
- You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
- Click Add.

### What to do next

Provide User Access to Hive Database Tables from the Command Line

Hive provides the means to manage user access to Hive database tables directly from the command line. The most commonly-used commands are:

- GRANT

Syntax:

```
grant <permissions> on table <table> to user <user or group>;
```

For example, to create a policy that grants user1 SELECT permission on the table default-hivesmoke22074, the command would be:

```
grant select on table default.hivesmoke22074 to user user1;
```

The syntax is the same for granting UPDATE, CREATE, DROP, ALTER, INDEX, LOCK, ALL, and ADMIN rights.

- REVOKE

Syntax:

```
revoke <permissions> on table <table> from user <user or group>;
```

For example, to revoke the SELECT rights of user1 to the table default.hivesmoke22074, the command would be:

```
revoke select on table default.hivesmoke22074 from user user1;
```

The syntax is the same for revoking UPDATE, CREATE, DROP, ALTER, INDEX, LOCK, ALL, and ADMIN rights.

### Related Information

[Wildcards and variables in resource-based policies](#)

## Configure a resource-based storage handler policy: HadoopSQL

How to configure a policy that allows authorized users to create data tables using storage-handlers.

### About this task

Ranger includes “storage-type” and “storage-url” resources in HadoopSQL Service that support only the permission “RW Storage ” permission. Ranger authorizes a user that creates or alters a table against this resource policy. A user having the required “RW Storage” permission on the resource representing the storage-type and storage-url, is allowed to create/alter the table in the respective storage.

### Procedure

1. On the Service Manager page, select HadoopSQL service.

The List of Policies HadoopSQL page appears.



**Note:** Service\_name remains cm\_hive. Display name is HadoopSQL.

2. To create a new policy, click Add New Policy.
  - a) On Create Policy click storage-type as shown in the following example:

**Create Policy**

**Policy Details:**

Policy Type: **Access** ⓘ ⌵ Add Validity Period

Policy Name \*: test storage handler policy ⓘ Enabled Normal

Policy Label: ⌵

Storage URL \*: ⌵ Include

Description: storage handler policy for HadoopSQL

Audit Logging: Yes

**Allow Conditions:** hide

Select Role	Select Group	Select User	Permissions	Delegate Admin	
Select Roles	Select Groups	<span>⌵ hive</span> <span>⌵ beacon</span> <span>⌵ dpprofiler</span> <span>⌵ hue</span> <span>⌵ admin</span> <span>⌵ impala</span>	RW Storage	<input checked="" type="checkbox"/>	<span>✗</span>

- b) Complete the required\* fields.
- c) In Allow Conditions, select users, then add the RW Storage permission, as shown in the preceding example.
- d) Scroll to the bottom of Create Policy, then click Add.

3. To configure an existing policy named all - storage-type, storage-url, click Edit.

The Edit Policy page appears.

**Edit Policy**

**Policy Details:**

Policy Type: **Access** ⓘ Add Validity Period

Policy ID: **10**

Policy Name:  Enabled Normal

Policy Label:

storage-type:  x

Storage URL:  Include

Description:

Audit Logging: Yes

**Allow Conditions:** hide

Select Role	Select Group	Select User	Permissions	Delegate Admin	
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="hive beacon dpprofiler hue admin impala"/>	<input type="text" value="RW Storage"/>	<input checked="" type="checkbox"/>	<input type="button" value="x"/>
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="rangerlookup"/>	<input type="text" value="Read select"/>	<input type="checkbox"/>	<input type="button" value="x"/>

4. Complete the Edit Policy page as follows:

**Table 35: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory. The policy is enabled by default.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.
storage-type	Type in the applicable storage type. * allows authorizes users to create any table in the specified storage type..
storage url	Type in the applicable storage url * allows authorizes users to create any table in the specified storage url. Select Exclude to deny access.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).

Field	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 36: Allow Conditions**

Label	Description
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: RW Storage, You can assign read and select permissions to rangerlookup user.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

**Example**

Example StorageHandler Policy Definitions:

**Phoenix StorageHandler policy:**

Storage Type: PhoenixStorageHandler

Storage Url: phoenix-cluster:port/table-name

**Kafka StorageHandler policy:**

Storage Type: kafka

Storage Url: bootstrap-server:port/kafka-topic

**JDBC StorageHandler policy:**

Storage Type: jdbc:mysql

Storage Url: mysql-host:port/DBname/Table , or

Storage Url: mysql-host:port/DBname/\*

**Note:**

Policy and table definitions must be in sync regarding the port definition, even for default port numbers. For example, if port number 3306 is defined in the policy for mysql and this port number is left out from the url as default value for the JDBC Driver, you must use the same reference as defined in the policy when creating the external table.

Using an explicit table name allows only to reference that specific table with hive.sql.table while using \* allows not only to reference any tables from the database but also allows you to write a custom query against this database, for example using hive.sql.query.

**Configure a resource-based policy: Kafka**

How to add a new policy to an existing Kafka service.

**Procedure**

1. On the Service Manager page, select an existing Kafka service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > cm\_kafka Policies > Create Policy

**Create Policy**

**Policy Details :**

Policy Type: **Access** ⓘ ⊕ Add Validity Period

Policy Name \*:  enabled normal

Policy Label:  include

topic ☒ transactionalid ☐ cluster ☐ delegationtoken ☐

Audit Logging: **YES**

**Policy Conditions** ⊕

No Conditions

**Allow Conditions :** hide

Select Role	Select Group	Select User	Policy Conditions	Permissions	Delegate Admin	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<span>Add Conditions</span>	<span>Add Permissions</span>	<input type="checkbox"/>	<span>×</span>
<span>⊕</span>	<span>⊕</span>	<span>⊕</span>	<span>⊕</span>	<span>⊕</span>		

- Complete the Create Policy page as follows:

**Table 37: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.
Topic	Kafka resource type. A topic is a category or feed name to which messages are published.
Transactional ID	Kafka resource type, uniquely identifies producers in a persistent way.
Cluster	Kafka resource type.
Delegation Token	Kafka resource type for authentication.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Add Validity Period	Specify a start and end time for the policy.

Field	Description
Policy Conditions (applied at the policy level)	Click the + icon, then specify an IP address range.

**Table 38: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Policy Conditions (applied at the item level)	Specify an IP address range.
Permissions	Add or edit permissions: Publish, Consume, Configure, Describe, Create, Delete, Describe Configs, Alter Configs, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

4. You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
5. You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
6. Click Add.

### Related Information

[Wildcards and variables in resource-based policies](#)

## Configure a resource-based policy: Knox

How to add a new policy to an existing Knox service.

### Procedure

1. On the Service Manager page, select an existing Knox service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 39: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Knox Topology	Enter an appropriate Topology Name.
Knox Service	Enter an appropriate Service Name.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.
Add Validity Period	Specify a start and end time for the policy.



Field	Description
Policy Conditions (applied at the policy level)	Click the + icon, then specify an IP address range.

**Table 40: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Policy Conditions (applied at the item level)	Specify an IP address range.
Permissions	Add or edit permissions: Allow
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

Since Knox does not provide a command line methodology for assigning privileges or roles to users, the User and Group Permissions portion of the Knox Create Policy form is especially important.

4. You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
5. You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
6. Click Add.

### Related Information

[Wildcards and variables in resource-based policies](#)

## Configure a resource-based policy: NiFi

How to add a new policy to an existing Atlas service.

### Procedure

1. On the Service Manager page, select an existing NiFi service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 41: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
NiFi Resource Identifier	In a NiFi cluster, all nodes must be granted the ability to view and modify component data in order for user to list or empty queues in processor component outbound connections. With Ranger this can be accomplished by using a wildcard to grant all of the NiFi nodes read and write access to the /data/* NiFi resource.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.

Field	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 42: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: Read, Write, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

4. You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
5. You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
6. Click Add.

## Configure a resource-based policy: NiFi Registry

How to add a new policy to an existing Atlas service.

### Procedure

1. On the Service Manager page, select an existing NiFi Registry service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 43: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
NiFi Registry Resource Identifier	In a NiFi cluster, all nodes must be granted the ability to view and modify component data in order for user to list or empty queues in processor component outbound connections. With Ranger this can be accomplished by using a wildcard to grant all of the NiFi nodes read and write access to the /data/* NiFi resource.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.

Field	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 44: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: Read, Write, Delete, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

- You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
- You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
- Click Add.

**Related Information**

[SQL Standard Based Hive Authorization](#)

**Configure a resource-based policy: S3**

How to add a new policy to an existing S3 service.

**Procedure**

- On the Service Manager page, select an existing S3 service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 45: Policy Details**

Field	Description
Policy Name	Enter a unique name for this policy. The name cannot be duplicated anywhere in the system.
Policy Label	An optional label for the policy. You can search reports and filter policies based on these labels.
Enabled/Disabled	Enables or disables the policy.
Normal/Override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
S3 Bucket	The S3 bucket.
Path	Specify the path for the policy. The default Recursive setting specifies that the path is recursive; you can also specify a non-recursive path.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).

Field	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 46: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: Read, Write, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

- You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
- You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
- Click Add.

## Configure a resource-based policy: Solr

How to add a new policy to an existing Solr service.

### Procedure

- On the Service Manager page, select an existing Solr service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 47: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Solr Collection	Non-SSL: http:<host_ip>:8983/solr SSL: https:<host_ip>:8985/solr
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.
Add Validity Period	Specify a start and end time for the policy.



Field	Description
Policy Conditions (applied at the policy level)	Click the + icon, then specify an IP address range.

**Table 48: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Policy Conditions (applied at the item level)	Specify an IP address range.
Permissions	Add or edit permissions: Query, Update, Others, Solr Admin, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

4. You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
5. You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
6. Click Add.

**Related Information**

[Wildcards and variables in resource-based policies](#)

**Configure a resource-based policy: YARN**

How to add a new policy to an existing YARN service.

**Procedure**

1. On the Service Manager page, select an existing YARN service.  
The List of Policies page appears.

- Click Add New Policy.  
The Create Policy page appears.

- Complete the Create Policy page as follows:

**Table 49: Policy Details**

Field	Description
Policy Name	Enter an appropriate policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Queue	The YARN queue to which the policy applies.
Recursive	The default recursive setting specifies that the policy will also be applied to all sub-queues; you can also specify a non-recursive path.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.

Field	Description
Add Validity Period	Specify a start and end time for the policy.

**Table 50: Allow Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.  To designate a role as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Select Group	Specify the groups to which this policy applies.  To designate a group as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify the users to which this policy applies.  To designate a user as an Administrator, select the Delegate Admin check box. Administrators can edit or delete the policy, and can also create child policies based on the original policy.
Permissions	Add or edit permissions: submit-app, admin-queue, Select/Deselect All.
Delegate Admin	You can use Delegate Admin to assign administrator privileges to the roles, groups, or users specified in the policy. Administrators can edit or delete the policy, and can also create child policies based on the original policy.

- You can use the Plus (+) symbol to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
- You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
- Click Add.

### Related Information

[Wildcards and variables in resource-based policies](#)

## Wildcards and variables in resource-based policies

Reference for wildcards and variables in resource-based policies.

### Ranger Authorization Resource Policy Wildcard Characters

Wildcard characters can be included in the resource path, the database name, the table name, or the column name:

- \* indicates zero or more occurrences of characters
- ? indicates a single character

### Ranger Authorization Resource Policy {USER} Variable

The variable {USER} can be used to autofill the accessing user, for example:

In Select User, choose {USER}.

In Resource Path, enter data\_{USER}.

### Ranger Authorization Resource Policy {USER} Variable Recommended Practices and Customizability

Ranger requires that string '{USER}' is used to represent accessing user as the user in the policy-item in a Ranger policy. However, Ranger provides flexible way of customizing the string that is used as shorthand to represent the

accessing user's name in the policy resource specification. By default, Ranger policy resource specification expects characters '{' and '}' as delimiters for string 'USER', however, ranger supports customizable way of specifying delimiter characters, escaping those delimiters, and the string 'USER' itself by prefixing it with another, user-specified string on a per resource-level basis in the service definition of each component supported by Ranger.

For example, if for a certain HDFS installation, if the path names may contain '{' or '}' as valid characters, but not '%' character, then the service-definition for HDFS can be specified as:

```
"resources": [
{
  "itemId": 1,
  "name": "path",
  "type": "path",
  "level": 10,
  "parent": "",
  "mandatory": true,
  "lookupSupported": true,
  "recursiveSupported": true,
  "excludesSupported": false,
  "matcher": "org.apache.ranger.plugin.resourcematcher.RangerPathResourceMatcher",
  "matcherOptions": {"wildcard": true, "ignoreCase": false}, "replaceTokens": true, "tokenDelimiterStart": "%", "tokenDelimiterEnd": "%", "tokenDelimiterPrefix": "rangerToken:"}
  "validationRegEx": "",
  "validationMessage": "",
  "uiHint": "",
  "label": "Resource Path",
  "description": "HDFS file or directory"
}
]
```

Corresponding ranger policy for the use case for HDFS will be written as follow:

```
resource: path=/home/%rangerToken:USER%
user: {USER}
permissions: all, delegateAdmin=true
```


The following customizable matcherOptions are available for this feature:

- **replaceTokens**: true if short-hand for user in resource-spec needs to be replaced at run-time with current-user's name; false if the resource-spec needs to be interpreted as it is. Default value: true.
- **tokenDelimiterStart**: Identifies start character of short-hand for current-user in resource specification. Default value: {.
- **tokenDelimiterEnd**: Identifies end character of short-hand for current-user in resource specification. Default value: }.
- **tokenDelimiterEscape**: Identifies escape character for escaping tokenDelimiterStart or tokenDelimiterEnd values in resource specification. Default value: \.
- **tokenDelimiterPrefix**: Identifies special prefix which together with string 'USER' makes up short-hand for current-user's name in the resource specification. Default value: .


## Preloaded resource-based services and policies

Apache Ranger includes preloaded resource-based services and policies.

- The preloaded resource-based services appear on the Service Manager page for resource-based policies, and are prefixed with "cm\_", with the exception of Hadoop SQL, which applies to multiple SQL stack components (Hive, Impala, and Hue).

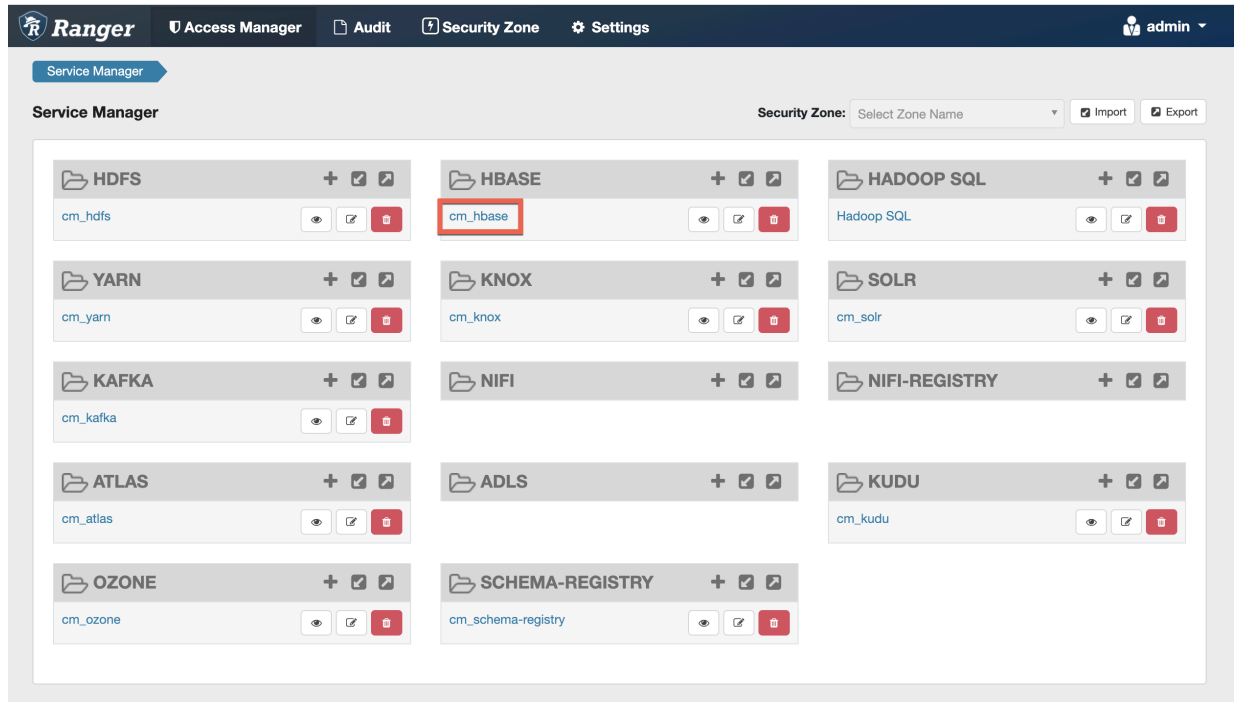

- To view the policies for each preloaded service, click the service name. To view policy details, click the applicable edit icon or policy ID number.

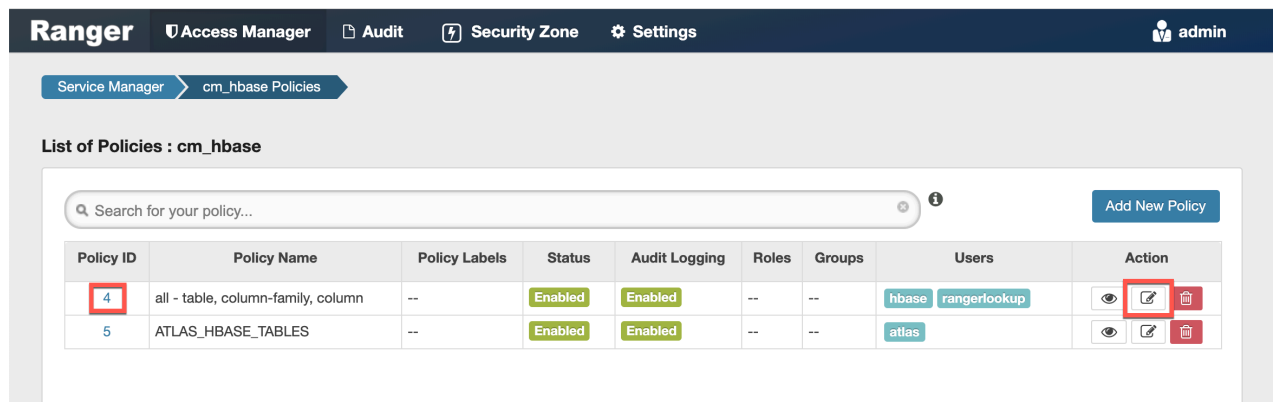

## Index

[cm\\_atlas](#)  
[cm\\_hbase](#)  
[cm\\_hdfs](#)  
[cm\\_kafka](#)  
[cm\\_knox](#)  
[cm\\_nifi](#)  
[cm\\_solr](#)  
[cm\\_yarn](#)

## Hadoop SQL

## cm\_atlas

**all - entity-type, entity-classification, entity, entity-business-metadata**

This is a default policy of type "entity" that gives access to all entities and their business metadata attributes for the following users and groups, with the specified permissions:

- admin, dpprofiler, beacon – Update Business Metadata
- rangertagsync, rangerlookup – Read entity
- public group – Read entity

**all - entity-type, entity-classification, entity**

This is a default policy of type "entity" that gives access to all entities and their classifications for the following users and groups, with the specified permissions:

- admin, dpprofiler, beacon – Read, Create, Update, Delete entity & Add, Update, Remove classification
- rangertagsync, rangerlookup – Read entity
- public group – Read entity

**all - entity-type, entity-classification, entity, entity-label**

This is a default policy of type "entity" that gives access to all entities and classifications and their labels for the following users and groups, with the specified permissions:

- admin, dpprofiler, beacon – Add, Remove label
- rangertagsync, rangerlookup – Read entity
- public group – Read entity

**all - relationship-type, end-one-entity-type, end-one-entity-classification, end-one-entity, end-two-entity-type, end-two-entity-classification, end-two-entity**

This is a default policy of type "relationship" that gives access to all to all Entity-Relationships between End1-Entity-Type, End1-Entity-Classification, End1-Entity-ID and End2-Entity-Type, End2-Entity-Classification, End2-Entity-ID for the following users and groups, with the specified permissions:

- admin, dpprofiler, beacon – Add, Update, and Remove relationship
- public group – Add, Update, and Remove relationship

**all - atlas-service**

This is a default policy of type "atlas-service" that gives access to all atlas-services [export, import, purge, server] for the following users, with the specified permissions:

- admin, dpprofiler, beacon – Admin Export and Admin Import

**all - type-category, type**

This is a default policy of type "type-category" that gives access to all type categories [ENUM, ENTITY, CLASSIFICATION, RELATIONSHIP, STRUCT] and type names for the following users, with the specified permissions:

- admin, dpprofiler, beacon – Create, Update, and Delete type

**Allow users to manage favorite searches**

This is a default policy of type "entity-type" that gives access to \_\_AtlasUserProfile and \_\_AtlasUserSavedSearch resources which are internal types for favorite search. This policy provides Read, Create, Update, and Delete Entity permissions to validated users who create a favorite search.

**cm\_hbase****all - table, column-family, column**

Provides access to all HBase tables, column-families, and columns to the following users, with the specified permissions:

- hbase, rangerlookup – Read, Write, Create, Admin

**ATLAS\_HBASE\_TABLES**

Provides access to all HBase column-families and columns in the atlas\_janus and ATLAS\_ENTITY\_AUDIT\_EVENTS HBase tables, to the following user, with the specified permissions:

- atlas – Read, Write, Create, Admin

**cm\_hdfs****all - path**

Provides access to all HDFS resource paths to the following users, with the specified permissions:

- hdfs, rangerlookup – Read, Write, Execute

**kms-audit-path**

Provides access to the /ranger/audit/kms resource path to the following user, with the specified permissions:

- keyadmin – Read, Write, Execute

**cm\_kafka****all - topic**

Provides access to all topics to the following users, with the specified permissions:

- kafka, rangerlookup, streamsmgmgr, streamsrepmgr – Publish, Consume, Configure, Describe, Create, Delete, Describe Configs, Alter Configs

**all - cluster**

Provides access to all clusters to the following users, with the specified permissions:

- kafka, rangerlookup, streamsmgmgr, streamsrepmgr – Configure, Describe, Create, Kafka Admin, Idempotent Write, Describe Configs, Alter Configs

**all - transactionalid**

Provides transactionalid access to the following users, with the specified permissions:

- kafka, rangerlookup, streamsmgmgr, streamsrepmgr – Publish, Describe

**all - delegationtoken**

Provides delegationtoken access to the following users, with the specified permissions:

- kafka, rangerlookup, streamsmgmgr, streamsrepmgr – Describe

**ATLAS\_HOOK**

Provides ATLAS\_HOOK topic access to the following users, with the specified permissions:

- hbase, hive, impala, mlgov – Publish
- atlas – Create, Configure, and Consume

**ATLAS\_ENTITIES**

Provides ATLAS\_ENTITIES topic access to the following users, with the specified permissions:

- atlas – Create, Configure, and Publish
- rangertagsync – Consume

### **ATLAS\_SPARK\_HOOK**

Provides ATLAS\_SPARK\_HOOK topic access to the following user, with the specified permissions:

- atlas – Create, Configure, and Consume

Also provides ATLAS\_SPARK\_HOOK topic access to the following group, with the specified permissions:

- public – Publish

### **cm\_knox**

#### **all - topology, service**

Provides access to all Knox topologies and services to the following users, with the specified permissions:

- admin, rangerlookup – Allow

### **cm\_nifi**

#### **all - nifi-resource**

Provides access to all NiFi resource identifiers to the following user, with the specified permissions:

- rangerlookup – Read, Write

### **cm\_solr**

#### **all - collection**

Provides access to all Solr collections to the following users, with the specified permissions:

- solr, rangerlookup, ranger, atlas – Query, Update, Others, Solr Admin

### **RANGER\_AUDITS\_COLLECTION**

Provides access to the RANGER\_AUDITS\_COLLECTION Solr collection to the following users, with the specified permissions:

- atlas, hbase, hdfs, hive, impala, kafka, knox, nifi, ranger, storm, yarn – Query, Update, Others
- ranger – Query, Update, Others, Solr Admin

### **cm\_yarn**

#### **all - queue**

Provides access to all YARN queues to the following users, with the specified permissions:

- yarn, rangerlookup – submit-app, admin-queue

### **Hadoop SQL**

#### **all - global**

Provides global access to the following users, with the specified permission:

- hive, beacon, dpprofiler, hue, admin, impala, rangerlookup – Temporary UDF Admin





**Note:** The Ranger web UI may show additional permissions for the all-global policy, but the only valid permission is Temporary UDF Admin.

#### **all - database, table, column**

Provides access to all databases, tables, and columns to the following users, with the specified permissions:

- hive, rangerlookup, impala – Select, Update, Create, Drop, Alter, Index, Lock, All, Read, Write, ReplAdmin, Service Admin, Temporary UDF Admin, Refresh
- {OWNER} – All

#### **all - database, table**

Provides access to all databases and tables to the following users, with the specified permissions:

- hive, rangerlookup, impala – Select, Update, Create, Drop, Alter, Index, Lock, All, Read, Write, ReplAdmin, Service Admin, Temporary UDF Admin, Refresh
- {OWNER} – All

#### **all - storage-type, storage-url**

Ranger introduces new resources “storage-type” and “storage-url” in HadoopSQL Service and supports only one permission “RW Storage”. When a user creates / alters a table, they will be authorized against this resource policy. Users granted “RW Storage” permission on the resource representing the storage-type + storage-url, can create/alter the table in the respective storage. Provides access to all databases to the following users, with the RW Storage permission only:

- hive, rangerlookup, impala, beacon, dpprofiler, hue, admin



**Note:** {OWNER} macro should NOT be configured for StorageHandler policies.

#### **all - database**

Provides access to all databases to the following users, with the specified permissions:

- hive, rangerlookup, impala – Select, Update, Create, Drop, Alter, Index, Lock, All, Read, Write, ReplAdmin, Service Admin, Temporary UDF Admin, Refresh
- {OWNER} – All

Also provides access to all databases to the following group, with the specified permissions:

- public – Create

#### **all - hiveservice**

Provides hiveservice access to the following users, with the specified permissions:

- hive, rangerlookup, impala – Select, Update, Create, Drop, Alter, Index, Lock, All, Read, Write, ReplAdmin, Service Admin, Temporary UDF Admin, Refresh

#### **all - database, udf**

Provides database and udf access to the following users, with the specified permissions:

- hive, rangerlookup, impala – Select, Update, Create, Drop, Alter, Index, Lock, All, Read, Write, ReplAdmin, Service Admin, Temporary UDF Admin, Refresh
- {OWNER} – All

#### **all - url**

Provides url access to the following users, with the specified permissions:

- hive, rangerlookup, impala – Select, Update, Create, Drop, Alter, Index, Lock, All, Read, Write, ReplAdmin, Service Admin, Temporary UDF Admin, Refresh

**default database tables columns**

Provides access to all tables and columns in the default database to the following user, with the specified permissions:

- impala – Create

Also provides access to all tables and columns in the default database to the following group, with the specified permissions:

- public – Create

**information\_schema database tables columns**

Provides access to all tables and columns in the information\_schema database to the following user, with the specified permissions:

- impala – Select

Also provides access to all tables and columns in the information\_schema database to the following group, with the specified permissions:


- public – Select

## Importing and exporting resource-based policies

You can export and import policies from the Ranger Admin UI for cluster resiliency (backups), during recovery operations, or when moving policies from test clusters to production clusters. You can export/import a specific subset of policies (such as those that pertain to specific resources or user/groups) or clone the entire repository (or multiple repositories) via Ranger Admin UI.

### Interfaces

You can import and export policies from the Service Manager page:

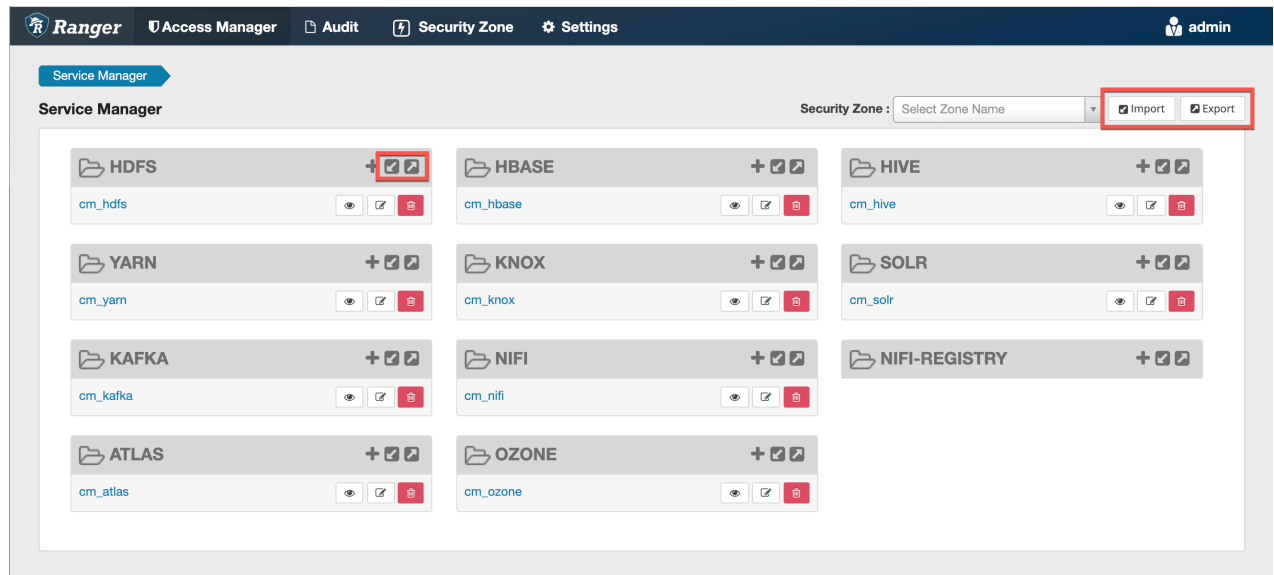

You can also export policies from the Reports page:

**Ranger** Access Manager Audit Security Zone Settings admin

User Access Report

**Reports**

Search Criteria hide

Policy Name  Policy Type Access

Component Select Component Resource

Policy Label Select Policy Label Zone Name Select Zone Name

Search By Group Select Group

Q Search

**HDFS**

Policy ID	Policy Name	Policy Labels	Resources	Policy Type	Status	Zone Name	Allow Conditions	Allow Exclude	Deny Conditions	Deny Exclude
1	all - path	--	path:/*	Access	Enabled	--	+	+	+	+
2	kms-audit-path	--	path:/ranger/audit/kms	Access	Enabled	--	+	+	+	+

**Export**

- Excel file
- CSV file
- JSON file

**HBASE**

Policy ID	Policy Name	Policy Labels	Resources	Policy Type	Status	Zone Name	Allow Conditions	Allow Exclude	Deny Conditions	Deny Exclude
3	all - table, column-family, col...	--	column-family:* column:* table:*	Access	Enabled	--	+	+	+	+

Table 51: Export Policy Options

	Service Manager Page	Reports Page
Formats	JSON	JSON Excel CSV
Filtering Supported	No	Yes
Specific Service Export	Yes	Via filtering

### Filtering

When exporting from the Reports page, you can apply filters before saving the file.

### Export Formats

You can export policies in the following formats:

- Excel
- JSON
- CSV

Note: CSV format is not supported for importing policies.

When you export policies from the Service Manager page, the policies are automatically downloaded in JSON format. If you wish to export in Excel or CSV format, export the policies from the Reports page dropdown menu.

### Required User Roles

The Ranger admin user can import and export only Resource & Tag based policies. The credentials for this user are set in Ranger Configs > Advanced ranger-env in the fields labeled admin\_username (default: admin/admin).

The Ranger KMS keyadmin user can import and export only KMS policies. The default credentials for this user are keyadmin/keyadmin.

### Limitations

To successfully import policies, use the following database versions:

- MariaDB: 10.1.16+
- MySQL: 5.6.x+
- Oracle: 11gR2+
- PostgreSQL: 8.4+
- MS SQL: 2008 R2+

Partial import is not supported.

### Related Information

[Importing and exporting tag-based policies](#)

## Import resource-based policies for a specific service

How to import resource-based policies for a specific service (HBase, YARN, etc.).

### Procedure

1. On the Service Manager page, click the Import icon for the service:



The Import Policy page appears.


**2. Select the file to import.**

You can only import policies in JSON format.


Security Zone : Select


## Import Policy

Select File :

Select file 

Override Policy : ☐

*Ranger\_Policies\_20190717\_190622.json* 


 All services gets listed on service destination when Zone destination is blank.  
When zone is selected at destination, then only services associated with that zone will be listed.

**Specify Zone Mapping :**

Source


To


Destination

No zone selected 

**Specify Service Mapping :**


Source


cm\_hdfs 



To

Destination

Select service name 



Cancel

Import

3. (Optional) Configure the import operation:

- The Override Policy option deletes all policies of the destination repositories.
- Zone Mapping – when no destination is selected, all services are imported. When a destination is selected, only the services associated with that security zone are imported.
- Service Mapping maps the downloaded file repository, i.e. source repository to destination repository. You can use the red x symbols to remove services from the import. Scroll down to view all service mappings.

**Import Policy**

**Specify Zone Mapping :**

Source: [Empty field] To Destination: [No zone selected]

**Specify Service Mapping :**

Source	To	Destination
cm_hdfs	To	cm_hdfs
cm_hbase	To	cm_hbase
cm_yarn	To	cm_yarn
cm_hive	To	cm_hive
cm_knox	To	cm_knox
cm_storm	To	cm_storm

Buttons: Cancel, Import

4. Click Import.

A confirmation message appears after the file is imported.

**Related Information**


[Import resource-based policies for all services](#)

**Import resource-based policies for all services**

How to import policies for all services.

## Procedure

1. On the Service Manager page, click Import.

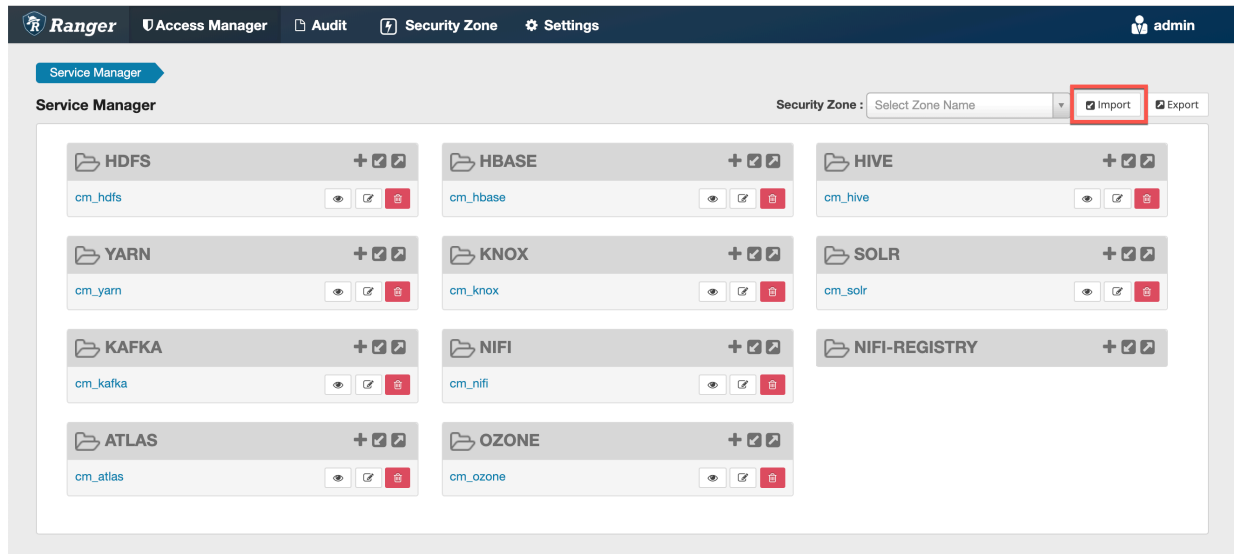


The Import Policy page appears.


Security Zone : Select


## Import Policy

Select File :

Select file 

Override Policy : ☐

*Ranger\_Policies\_20190717\_190622.json* 


 All services gets listed on service destination when Zone destination is blank.  
When zone is selected at destination, then only services associated with that zone will be listed.

Specify Zone Mapping :

Source

Destination



To

No zone selected 




Specify Service Mapping :

Source

Destination

cm\_hdfs  

To

cm\_hdfs   

Cancel

Import

2. Select the file to import.

You can only import policies in JSON format.

84



3. (Optional) Configure the import operation:

- The Override Policy option deletes all policies of the destination repositories.
- Zone Mapping – when no destination is selected, all services are imported. When a destination is selected, only the services associated with that security zone are imported.
- Service Mapping maps the downloaded file repository, i.e. source repository to destination repository. You can use the red x symbols to remove services from the import. Scroll down to view all service mappings.

**Import Policy**

**Specify Zone Mapping :**

Source:  To Destination:

**Specify Service Mapping :**

Source	To	Destination
cm_hdfs	To	cm_hdfs
cm_hbase	To	cm_hbase
cm_yarn	To	cm_yarn
cm_hive	To	cm_hive
cm_knox	To	cm_knox
cm_storm	To	cm_storm

Cancel Import

4. Click Import.

A confirmation message appears after the file is imported.

**Related Information**

[Import resource-based policies for a specific service](#)

**Export resource-based policies for a specific service**

How to export the policies for a specific service (HBase, YARN, etc).

**About this task**

If you would like to export in Excel or CSV format, export the policies from the Reports page dropdown menu.


**Procedure**

1. On the Service Manager page, click the Export icon for the service:



The Export Policy page appears.

2. Click Export.

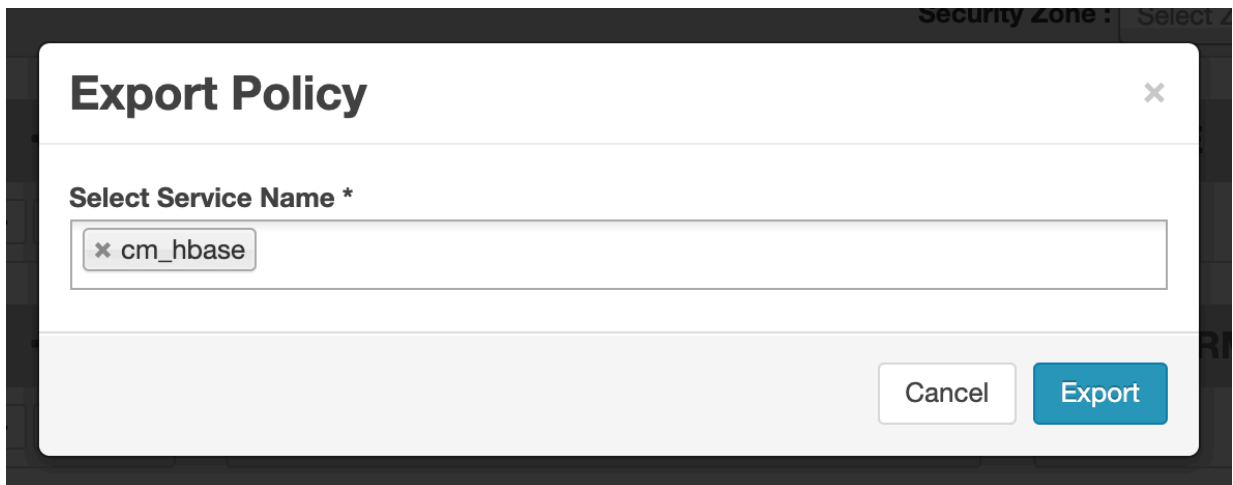

The file downloads in your browser as a JSON file.

**Related Information**

[Export all resource-based policies for all services](#)

**Export all resource-based policies for all services**


How to export the policies for all service.

**About this task**

If you would like to export in Excel or CSV format, export the policies from the Reports page drop-down menu.

## Procedure

- From the Service Manager page:
  - Click Export.  
The Export Policy page appears.
  - Remove components or specific services, then click Export.

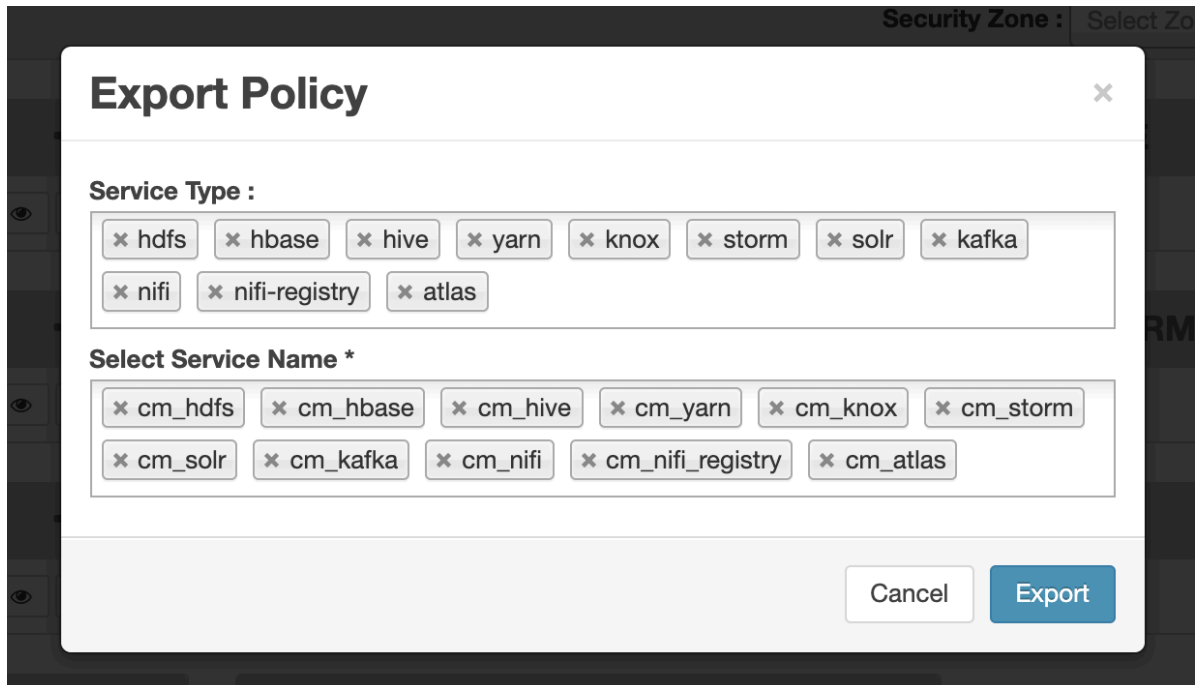

The image shows a screenshot of the 'Export Policy' dialog box in a web application. The dialog has a title bar with 'Export Policy' and a close button (X). Below the title bar, there are two sections: 'Service Type :' and 'Select Service Name \*'. The 'Service Type :' section contains a grid of buttons with 'x' icons, representing selected services: hdfs, hbase, hive, yarn, Knox, storm, solr, kafka, nifi, nifi-registry, and atlas. The 'Select Service Name \*' section contains a similar grid of buttons with 'x' icons, representing selected service names: cm\_hdfs, cm\_hbase, cm\_hive, cm\_yarn, cm\_knox, cm\_storm, cm\_solr, cm\_kafka, cm\_nifi, cm\_nifi\_registry, and cm\_atlas. At the bottom right of the dialog, there are two buttons: 'Cancel' and 'Export'.

**Export Policy**

**Service Type :**

- ☒ hdfs
- ☒ hbase
- ☒ hive
- ☒ yarn
- ☒ Knox
- ☒ storm
- ☒ solr
- ☒ kafka
- ☒ nifi
- ☒ nifi-registry
- ☒ atlas

**Select Service Name \***

- ☒ cm\_hdfs
- ☒ cm\_hbase
- ☒ cm\_hive
- ☒ cm\_yarn
- ☒ cm\_knox
- ☒ cm\_storm
- ☒ cm\_solr
- ☒ cm\_kafka
- ☒ cm\_nifi
- ☒ cm\_nifi\_registry
- ☒ cm\_atlas

Cancel Export

The file downloads in your browser as a JSON file.

- From the Reports page:
  - Apply filters before exporting the file.
  - Open the Export drop-down menu:

The screenshot shows the Apache Ranger web interface. At the top, there's a navigation bar with 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user is logged in as 'admin'. Below the navigation bar, there's a 'User Access Report' section. Under 'Reports', there's a 'Search Criteria' section with various filters like Policy Name, Policy Type, Component, Resource, Policy Label, Zone Name, and Search By. Below this, there are two tables: 'HDFS' and 'HBASE'. The 'HDFS' table has columns for Policy ID, Policy Name, Policy Labels, Resources, Policy Type, Status, Zone Name, Allow Conditions, Allow Exclude, Deny Conditions, and Deny. The 'HBASE' table has similar columns. The 'Export' button is highlighted with a red box, and its dropdown menu is open, showing options for 'Excel file', 'CSV file', and 'JSON file'.

- Select the file format.  
The file downloads in your browser.

### Related Information

[Export resource-based policies for a specific service](#)

## Row-level filtering and column masking in Hive

You can use Apache Ranger row-level filters to set access policies for rows in Hive tables. You can also use Ranger column masking to set policies that mask data in Hive columns, for example to show only the first or last four characters of column data.



**Note:** To prevent possible data loss, row filtering and masking policies must exclude users that run compaction. For more information about excluding compaction users from Ranger policies, see [Compaction prerequisites](#) in [Managing Apache Hive](#).

### Related Information

[Compaction prerequisites](#)

## Row-level filtering in Hive with Ranger policies

Row-level filtering helps simplify Hive queries. By moving the access restriction logic down into the Hive layer, Hive applies the access restrictions every time data access is attempted. This helps simplify authoring of the Hive query, and provides seamless behind-the-scenes enforcement of row-level segmentation without having to add this logic to the predicate of the query.

## About this task

Row-level filtering also improves the reliability and robustness of Hadoop. By providing row-level security to Hive tables and reducing the security surface area, Hive data access can be restricted to specific rows based on user characteristics (such as group membership) and the runtime context in which this request is issued.

Typical use cases where row-level filtering can be beneficial include:

- A hospital can create a security policy that allows doctors to view data rows only for their own patients, and that allows insurance claims administrators to view only specific rows for their specific site.
- A bank can create a policy to restrict access to rows of financial data based on the employee's business division, locale, or based on the employee's role (for example: only employees in the finance department are allowed to see customer invoices, payments, and accrual data; only European HR employees can see European employee data).
- A multi-tenant application can create logical separation of each tenant's data so that each tenant can see only their own data rows.


You can use Apache Ranger row-level filters to set access policies for rows in Hive tables. Row-level filter policies are similar to other Ranger access policies. You can set filters for specific users, groups, and conditions.

The following conditions apply when using row-level filters:

- The filter expression must be a valid WHERE clause for the table or view.
- Each table or view should have its own row-level filter policy.
- Wildcard matching is not supported on database or table names.
- Filters are evaluated in the order listed in the policy.
- An audit log entry is generated each time a row-level filter is applied to a table or view.

## Procedure

1. On the Service Manager page, select an existing Hive Service.
2. Select the Row Level Filter tab, then click Add New Policy.

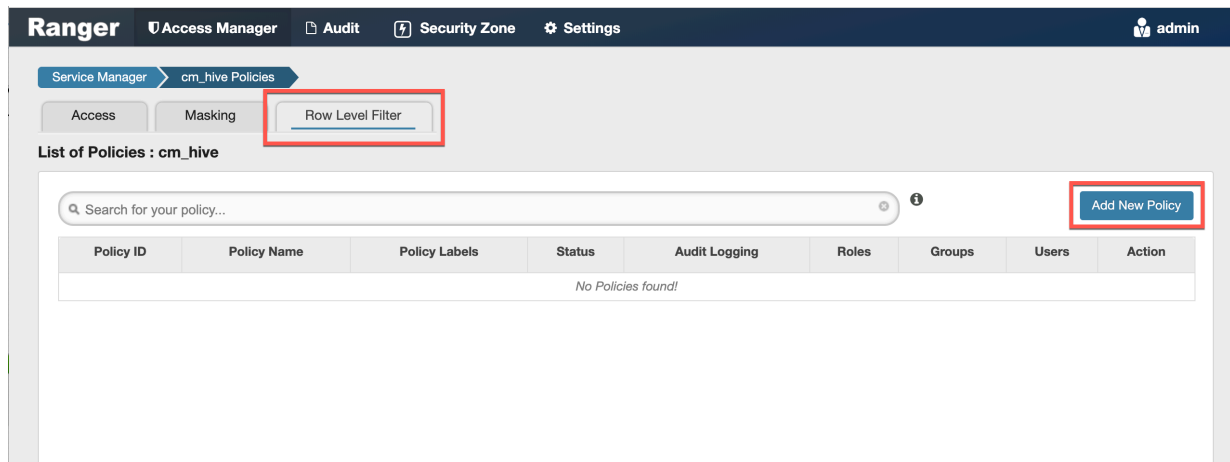

3. On the Create Policy page, add the following information for the row-level filter:

**Table 52: Policy Details**

Field	Description
Policy Name (required)	Enter an appropriate policy name. This name cannot be duplicated across the system. The policy is enabled by default.

Field	Description
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Hive Database (required)	Type in the applicable database name. The auto-complete feature displays available databases based on the entered text.
Hive Table (required)	Type in the applicable table name. The auto-complete feature displays available tables based on the entered text.
Audit Logging	Audit Logging is set to Yes by default. Select No to turn off audit logging.
Description	Enter an optional description for the policy.
Add Validity Period	Specify a start and end time for the policy.

**Table 53: Row Filter Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.
Select Group	Specify the groups to which this policy applies. The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify one or more users to which this policy applies.
Access Types	Currently select is the only available access type. This will be used in conjunction with the WHERE clause specified in the Row Level Filter field.

Label	Description
Add Row Filter	<ul style="list-style-type: none"> <li>To create a row filter for the specified users, groups, and roles, Click Add Row Filter, then type a valid WHERE clause in the Enter filter expression box.</li> <li>To allow Select access for the specified users and groups without row-level restrictions, do not add a row filter (leave the setting as "Add Row Filter").</li> <li>Filters are evaluated in the order listed in the policy. The filter at the top of the Row Filter Conditions list is applied first, then the second, then the third, and so on.</li> </ul>

Ranger
Access Manager
Audit
Security Zone
Settings
admin

Service Manager
cm\_hive Policies
Create Policy

### Create Policy

Please ensure that users/groups listed in this policy have access to the table via an **Access Policy**. This policy does not implicitly grant access to the table.

**Policy Details :**

Policy Type: **Row Level Filter** Add Validity Period

Policy Name \*  enabled normal

Policy Label

Hive Database \*

Hive Table \*

Description

Audit Logging YES

**Row Filter Conditions :**

Select Role	Select Group	Select User	Access Types	hide
Select Roles	Select Groups	<input type="text" value="x admin"/>	Add Permissions + Add Row Filter +	x
Select Roles	Select Groups	<input type="text" value="x systest"/>	Add Permissions + Add Row Filter +	x
Select Roles	<input type="text" value="x public"/>	Select Users	Add Permissions + Add Row Filter +	x

+

Add Cancel

Enter filter expression

4. To move a condition in the Row Filter Conditions list (and therefore change the order in which it is evaluated), click the dotted rows icon at the left of the condition row, then drag the condition to a new position in the list.

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager cm\_hive Policies Create Policy

**Create Policy**

Please ensure that users/groups listed in this policy have access to the table via an Access Policy. This policy does not implicitly grant access to the table.

**Policy Details :**

Policy Type **Row Level Filter** Add Validity Period

Policy Name \* Policy Label enabled normal

Policy Label Policy Label

Hive Database \* Policy Label

Hive Table \* Policy Label

Description

Audit Logging **YES**

**Row Filter Conditions :**

Select Role	Select Group	Select User	Access Types	Row Level Filter	
Select Roles	Select Groups	admin	Add Permissions +	Add Row Filter +	x
Select Roles	Select Groups	systest	Add Permissions +	Add Row Filter +	x
Select Roles	public	Select Users	Add Permissions +	Add Row Filter +	x

Add Cancel

5. Click Add to add the new row-level filter policy.

## Dynamic resource-based column masking in Hive with Ranger policies

You can use Apache Ranger dynamic resource-based column masking capabilities to protect sensitive data in Hive in near real-time. You can set policies that mask or anonymize sensitive data columns (such as PII, PCI, and PHI) dynamically from Hive query output. For example, you can mask sensitive data within a column to show only the first or last four characters.

### About this task

Dynamic column masking policies are similar to other Ranger access policies for Hive. You can set filters for specific users, groups, and conditions. With dynamic column-level masking, sensitive information never leaves Hive, and no changes are required at the consuming application or the Hive layer. There is also no need to produce additional protected duplicate versions of datasets.

The following conditions apply when using Ranger column masking policies to mask data returned in Hive query results:



- A variety of masking types are available, such as show last 4 characters, show first 4 characters, Hash, Nullify, and date masks (show only year).




**Note:** Ranger depends on Hive/Impala's hashing functions for hash masking.

- Impala uses sha512 in FIPS mode, sha256 in non-FIPS mode.
- Hive uses sha256. Plans to update to sha512 in FIPS mode.
- You can specify a masking type for specific users, groups, and conditions.
- Wildcard matching is not supported.
- Each column should have its own masking policy.
- Masks are evaluated in the order listed in the policy.
- An audit log entry is generated each time a masking policy is applied to a column.

## Procedure

- In Service Manager, select an existing Hive Service.
- Select the Masking tab, then click Add New Policy.

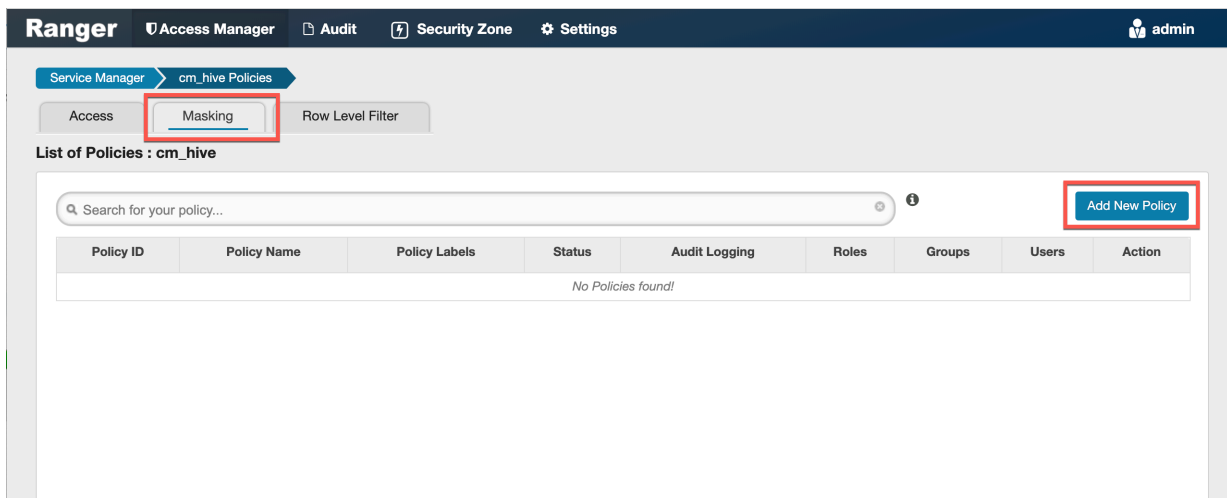

- In Create Policy, add the following information for the column-masking filter:

**Table 54: Policy Details**

Field	Description
Policy Name (required)	Enter an appropriate policy name. This name cannot be duplicated across the system. The policy is enabled by default.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
Hive Database (required)	Type in the applicable database name. The auto-complete feature displays available databases based on the entered text.
Hive Table (required)	Type in the applicable table name. The auto-complete feature displays available tables based on the entered text.
Hive Column (required)	Type in the applicable column name. The auto-complete feature displays available columns based on the entered text.
Audit Logging	Audit Logging is set to Yes by default. Select No to turn off audit logging.

Field	Description
Description	Enter an optional description for the policy.
Add Validity Period	Specify a start and end time for the policy.

**Table 55: Mask Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.
Select Group	Specify the groups to which this policy applies.  The public group contains all users, so granting access to the public group grants access to all users.
Select User	Specify one or more users to which this policy applies.
Access Types	Currently, select is the only available access type.

Label	Description
Select Masking Type	<p>To create a row filter for the specified users, groups, and roles, click Select Masking Option, then select a masking type:</p> <ul style="list-style-type: none"> <li>Redact – mask all alphabetic characters with "x" and all numeric characters with "n".</li> <li>Partial mask: show last 4 – Show only the last four characters.</li> <li>Partial mask: show first 4 – Show only the first four characters.</li> <li>Hash – Replace all characters with a hash of entire cell value.</li> <li>Nullify – Replace all characters with a NULL value.</li> <li>Unmasked (retain original value) – No masking is applied.</li> <li>Date: show only year – Show only the year portion of a date string and default the month and day to 01/01</li> <li>Custom – Specify a custom masked value or expression. Custom masking can use any valid Hive UDF (Hive that returns the same data type as the data type in the column being masked).</li> </ul> <p>Masking conditions are evaluated in the order listed in the policy. The condition at the top of the Masking Conditions list is applied first, then the second, then the third, and so on.</p>

Ranger
Access Manager
Audit
Security Zone
Settings
admin

Service Manager
cm\_hive Policies
Create Policy

Create Policy

Please ensure that users/groups listed in this policy have access to the column via an Access Policy. This policy does not implicitly grant access to the column.

Policy Details :

Policy Type: Masking
Add Validity Period

Policy Name \*
enabled normal

Policy Label: Policy Label

Hive Database \*

Hive Table \*

Hive Column \*

Description

Audit Logging: YES

Mask Conditions :

Select Role
Select Group
Select User
Access Types

Select Roles
Select Groups
x hive
Add Permissions
Select Masking Option

+

Add Cancel

4. To move a condition in the Mask Conditions list (and therefore change the order in which it is evaluated), click the dotted rows icon at the left of the condition row, then drag the condition to a new position in the list.

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager cm\_hive Policies Create Policy

**Policy Details :**

Policy Type **Masking** ⓘ enabled normal ⓘ Add Validity Period

Policy Name \*

Policy Label

Hive Database \*

Hive Table \*

Hive Column \*

Description

Audit Logging **YES**

**Mask Conditions :** hide

Select Role	Select Group	Select User	Access Types	Select Masking Option
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="hive"/>	<span>Add Permissions</span> <span>+</span>	<span>Unmasked (retain original value)</span> <span>✕</span>
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="systest"/>	<span>Add Permissions</span> <span>+</span>	<span>Partial mask: show last 4</span> <span>✕</span>
<span>⋮</span> <input type="text" value="Select Roles"/>	<input type="text" value="public"/>	<input type="text" value="Select Users"/>	<span>Add Permissions</span> <span>+</span>	<span>Select Masking Option</span> <span>+</span> <span>✕</span>

Add Cancel

5. Click Add to add the new column masking filter policy.

## Dynamic tag-based column masking in Hive with Ranger policies

Where Ranger resource-based masking policy for Hive anonymizes data from a Hive column identified by the database, table, and column, Ranger tag-based masking policy anonymizes Hive column data based on tags and tag attribute values associated with Hive column (usually specified as metadata classification in Atlas).

### About this task

The following conditions apply when using Ranger column masking policies to mask data returned in Hive query results:

- A variety of masking types are available, such as show last 4 characters, show first 4 characters, Hash, Nullify, and date masks (show only year).




**Note:** Ranger depends on Hive/Impala's hashing functions for hash masking.

- Impala uses sha512 in FIPS mode, sha256 in non-FIPS mode.
- Hive uses sha256. Plans to update to sha512 in FIPS mode.

- You can specify a masking type for specific users, groups, and conditions.
- Wildcard matching is not supported.
- If there are multiple tag masking policies applied to the same Hive column, the masking policy with the lexicographically smallest policy-name is chosen for enforcement, E.G., policy "a" is enforced before policy "aa".
- Masks are evaluated in the order listed in the policy.
- An audit log entry is generated each time a masking policy is applied to a column.

### Procedure

1. Select Access Manager Tag Based Policies , then select a tag-based service.
2. Select the Masking tab, then click Add New Policy.

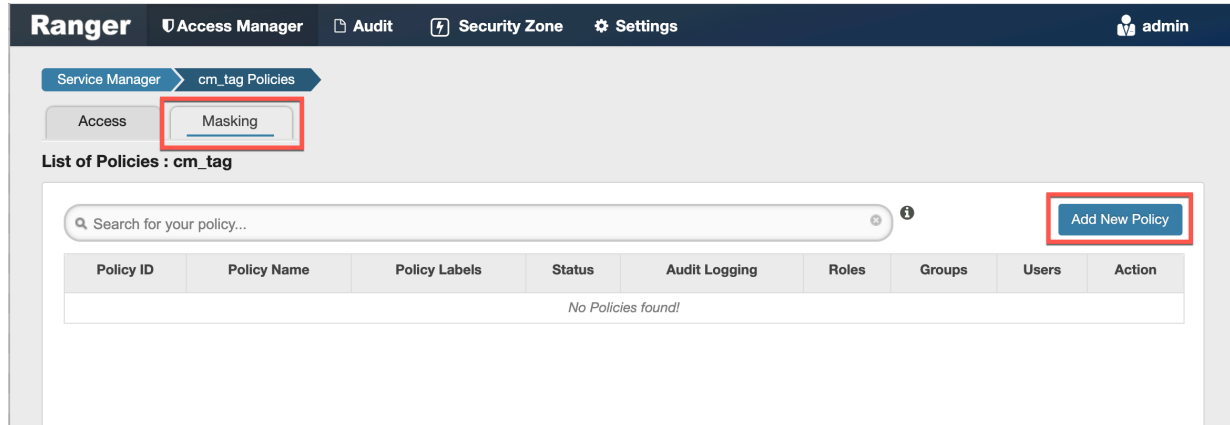

3. In Create Policy, add the following information for the column-masking filter:

**Table 56: Policy Details**

Field	Description
Policy Type (required)	Set to Masking by default.
Policy Name (required)	Enter an appropriate policy name. This name cannot be duplicated across the system. The policy is enabled by default.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
TAG (required)	Enter the applicable tag name, for example MASK.
Audit Logging	Audit Logging is set to Yes by default. Select No to turn off audit logging.
Description	Enter an optional description for the policy.
Add Validity Period	Specify a start and end time for the policy.

Field	Description
Policy Conditions (applied at the policy level)	<p>Click the + icon to add policy conditions. Currently "Accessed after expiry_date? (yes/no)" is the only available policy condition.</p> <p>"Accessed after expiry_date (yes/no)?" : To set this condition, type yes in the text box, then click check mark to add the condition.</p> <p>Enter boolean expression: Available for allow or deny conditions on tag-based policies. For examples and details, see "Using Tag Attributes and Values in Ranger Tag-Based Policy Conditions".</p> <p>Click Save to save the policy condition.</p>

**Table 57: Mask Conditions**

Label	Description
Select Role	Specify the roles to which this policy applies.
Select Group	<p>Specify the groups to which this policy applies.</p> <p>The public group contains all users, so granting access to the public group grants access to all users.</p>
Select User	Specify one or more users to which this policy applies.
Policy Conditions (applied at the item level)	<p>Click Add Conditions to add policy conditions. Currently "Accessed after expiry_date? (yes/no)" is the only available policy condition.</p> <p>"Accessed after expiry_date (yes/no)?" : To set this condition, type yes in the text box, then click check mark to add the condition.</p> <p>Enter boolean expression: Available for allow or deny conditions on tag-based policies. For examples and details, see "Using Tag Attributes and Values in Ranger Tag-Based Policy Conditions".</p>
Access Types	Currently select is the only available access type for the hive component.

Label	Description
Select Masking Option	<p>To create a row filter for the specified users, groups, and roles, click Select Masking Option, then select a masking type:</p> <ul style="list-style-type: none"> <li>Redact – mask all alphabetic characters with "x" and all numeric characters with "n".</li> <li>Partial mask: show last 4 – Show only the last four characters.</li> <li>Partial mask: show first 4 – Show only the first four characters.</li> <li>Hash – Replace all characters with a hash of entire cell value.</li> <li>Nullify – Replace all characters with a NULL value.</li> <li>Unmasked (retain original value) – No masking is applied.</li> <li>Date: show only year – Show only the year portion of a date string and default the month and day to 01/01</li> <li>Custom – Specify a custom masked value or expression. Custom masking can use any valid Hive UDF (Hive that returns the same data type as the data type in the column being masked).</li> </ul> <p>Masking conditions are evaluated in the order listed in the policy. The condition at the top of the Masking Conditions list is applied first, then the second, then the third, and so on.</p>

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > tag\_service1 Policies > Create Policy

**Create Policy**

*Please ensure that users/groups listed in this policy have access to the tag via an Access Policy. This policy does not implicitly grant access to the tag.*

**Policy Details :**

Policy Type: **Masking** enabled normal Add Validity Period

Policy Name \*

Policy Label:

TAG \*

Description:

Audit Logging: **YES**

**Policy Conditions** +

No Conditions

**Mask Conditions :**

Select Role	Select Group	Select User	Policy Conditions
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="hive"/>	<span>Add Conditions</span> <span>+</span>

+

Add Cancel

**Select Masking Option**

☒ Redact

☐ Partial mask: show last 4

☐ Partial mask: show first 4

☐ Hash

☐ Nullify

☐ Unmasked (retain original value)

☐ Date: show only year

☐ Custom

✓ ✕

HIVE + Add Mask Type + ✕

- Click + to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
- Click Add to add the new policy.

## Related Information

[Using tag attributes and values in Ranger tag-based policy conditions](#)

# Tag-based Services and Policies

Ranger enables you to create tag-based services and add access policies to those services.

## Adding a tag-based service


How to add a tag-based service to Ranger.


### About this task

You can use the Service Manager for Tag-Based Policies page to create tag-based services and add tag-based access policies that can be applied to Hadoop resources. Using tag-based policies enables you to control access to resources across multiple Hadoop components without creating separate services and policies in each component. You can also use Ranger TagSync to synchronize the Ranger tag store with an external metadata service such as Apache Atlas.

### Procedure

1.

Select Access Manager > Tag Based Policies, then click the Add icon (  ) in the TAG box on the Service Manager page.

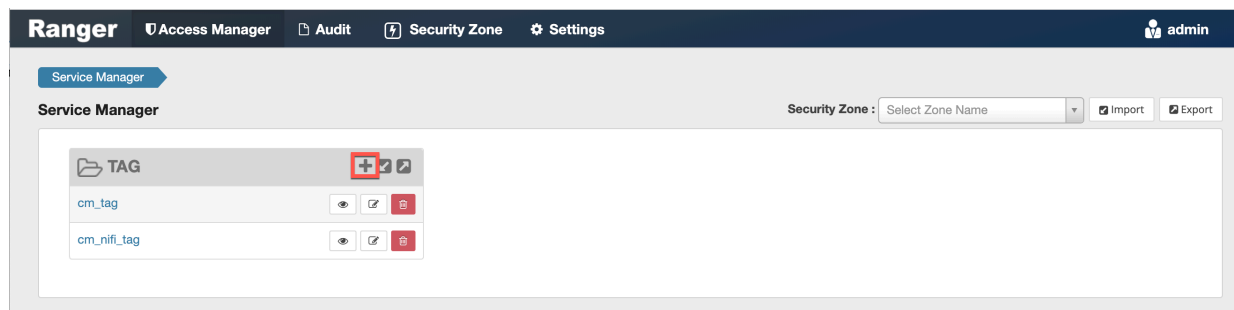



- On the Create Service page, type in a service name and an optional description. The service is enabled by default, but you can disable it by selecting Disabled. To add the service, click Add.

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager Create Service

**Create Service**

**Service Details :**

Service Name \*

Description

Active Status ☒ Enabled ☐ Disabled

**Config Properties :**

Add New Configurations

Name	Value
<input type="text"/>	<input type="text"/>

+

Test Connection

Add Cancel

- The new tag service appears on the Service Manager page.

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager

**Service Manager**

Security Zone : Select Zone Name Import Export

**TAG**

cm_tag			
cm_nifi_tag			
tag_service1			

## Adding tag-based policies

Tag-based policies enable you to control access to resources across multiple Hadoop components without creating separate services and policies in each component. You can also use Ranger TagSync to synchronize the Ranger tag store with an external metadata service such as Apache Atlas.

### Procedure

- Select Access Manager> Tag Based Policies, then select a tag-based service.

2. The List of Policies page appears with the Access tab selected by default. Click Add New Policy.

The screenshot shows the Ranger Access Manager interface. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user 'admin' is logged in. The breadcrumb trail is 'Service Manager > tag\_service1 Policies'. Below this, there are tabs for 'Access' (selected) and 'Masking'. The main heading is 'List of Policies : tag\_service1'. A search bar is present with the placeholder text 'Search for your policy...'. To the right of the search bar is an 'Add New Policy' button, which is highlighted with a red rectangle. Below the search bar is a table with the following data:

Policy ID	Policy Name	Policy Labels	Status	Audit Logging	Roles	Groups	Users	Action
38	EXPIRES_ON	--	Enabled	Enabled	--	public	rangerlookup	

The Create Policy page appears:

Ranger
Access Manager
Audit
Security Zone
Settings
admin

Service Manager
tag\_service1 Policies
Create Policy

### Create Policy

**Policy Details :**

Policy Type
Access
Add Validity Period

Policy Name \*
☒ enabled
☐ normal

Policy Label

TAG \*

Description

Audit Logging
☒ YES

**Policy Conditions**
+

No Conditions

**Allow Conditions :**
hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
<input type="text"/>	<input type="text"/>	<input type="text"/>	Add Conditions +	Add Permissions +	×
+					
⚠ Exclude from Allow Conditions :					
hide					
<input type="text"/>	<input type="text"/>	<input type="text"/>	Add Conditions +	Add Permissions +	×
+					

**Deny Conditions :**
hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
<input type="text"/>	<input type="text"/>	<input type="text"/>	Add Conditions +	Add Permissions +	×
+					

3. Enter information on the Create Policy page as follows:

**Table 58: Policy Details**

Field	Description
Policy Type	Set to Access by default.
Policy Name	Enter a unique policy name. This name cannot be duplicated across the system. This field is mandatory.
normal/override	Enables you to specify an override policy. When override is selected, the access permissions in the policy override the access permissions in existing policies. This feature can be used with Add Validity Period to create temporary access policies that override existing policies.
TAG	Enter the applicable tag name.
Description	(Optional) Describe the purpose of the policy.
Audit Logging	Specify whether this policy is audited. (De-select to disable auditing).

Field	Description
Policy Label	Specify a label for this policy. You can search reports and filter policies based on these labels.
Add Validity Period	Specify a start and end time for the policy.
Policy Conditions (applied at the policy level)	<p>Click the + icon to add policy conditions. Currently "Accessed after expiry_date? (yes/no)" is the only available policy condition.</p> <p>"Accessed after expiry_date (yes/no)?" : To set this condition, type yes in the text box, then click the check mark button to add the condition.</p> <p>Enter boolean expression: Available for allow or deny conditions on tag-based policies. For examples and details, see "Using Tag Attributes and Values in Ranger Tag-Based Policy Conditions".</p> <p>Click Save to save the policy condition.</p>

Table 59: Allow, Exclude from Allow, Deny, and Exclude from Deny Conditions

Label	Description
Select Role	Specify the roles to which this policy applies.
Select Group	<p>Specify the group to which this policy applies. To designate the group as an Administrator for the chosen resource, specify Admin permissions. (Administrators can create child policies based on existing policies).</p> <p>The public group contains all users, so setting a condition for the public group applies to all users.</p>
Select User	Specify a particular user to which this policy applies (outside of an already-specified group) OR designate a particular user as Admin for this policy. (Administrators can create child policies based on existing policies).
Policy Conditions (applied at the item level)	<p>Click Add Conditions to add policy conditions. Currently "Accessed after expiry_date? (yes/no)" is the only available policy condition.</p> <p>"Accessed after expiry_date (yes/no)?" : To set this condition, type yes in the text box, then click the check mark button to add the condition.</p> <p>Enter boolean expression: Available for allow or deny conditions on tag-based policies. For examples and details, see "Using Tag Attributes and Values in Ranger Tag-Based Policy Conditions".</p>
Component Permissions	Click Add Permissions to add or edit component conditions. To add component permissions, enter the component name in the text box, then use the check boxes to specify component permissions. Click the check mark button to add the chosen component conditions to the policy.

- You can use the Plus (+) symbols to add additional conditions. Conditions are evaluated in the order listed in the policy. The condition at the top of the list is applied first, then the second, then the third, and so on.
- You can use Deny All Other Accesses to deny access to all other users, groups, and roles other than those specified in the allow conditions for the policy.
- Click Add to add the new policy.

#### Related Information

[Using tag attributes and values in Ranger tag-based policy conditions](#)

### Using tag attributes and values in Ranger tag-based policy conditions

Enter boolean expression allows Ranger to use tag attributes and values when configuring tag-based policy Allow or Deny conditions. It allows admins to provide boolean expression(s) using tag attributes.

The policy condition is introduced in the tag service definition:

```
{
  "itemId":2,
  "name":"expression",
  "evaluator": "org.apache.ranger.plugin.conditionevaluator.RangerScriptConditionEvaluator",
  "evaluatorOptions" : {"engineName":"JavaScript", "ui.isMultiline":"true"},
  "label":"Enter boolean expression",
  "description": "Boolean expression"
}
```

The following variables can be referenced in the boolean expression:

- ctx: Context handler containing APIs to access metadata information from the request.
- tag: Information about the current tag.
- tagAttr: Map containing all the current tag attributes and corresponding values.

The following APIs available from the request:

- getUser(): Returns a string.
- getUserGroups(): Returns a set of strings containing groups.
- getClientIPAddress(): Returns a string containing client IP address.
- getAction(): Returns a string containing information about the action being requested.

For two scenarios:

- User “sam” needs to be denied a policy based on the IP address of the machine from where the resources are accessed.

Set the deny condition for user sam with the following boolean expression:

```
if ( tagAttr.get('ipAddr').equals(ctx.getClientIPAddress()) ) {
  ctx.result = true;
}
```

- Deny one particular user, “bob” from a group, “users”, only when this user is accessing resources from a particular IP defined as an tag attribute in Atlas.

Set the deny condition for group users with the following boolean expression:

```
if (tagAttr.get('ipAddr').equals(ctx.getClientIPAddress()) && ctx.getUser().equals("bob")) {
  ctx.result=true;
}
```

Deny Conditions :

Select Group	Select User	Policy Conditions	Component Permissions
Select Group	<input type="text" value="sam"/>	expression : JavaScript Condition	<input type="button" value="MOVE"/> <input type="button" value="X"/>
<input type="text" value="users"/> <input type="text" value="bob"/>	Select User	expression : JavaScript Condition	<input type="button" value="MOVE"/> <input type="button" value="X"/>

( tagAttr.get('ipAddr').equals(ctx.getClientIPAddress()) ) {  
     ctx.result = true;}

(tagAttr.get('ipAddr').equals(ctx.getClientIPAddress()) &&  
   ctx.getUser().equals("bob")) {  
     ctx.result=true;}

### Adding a tag-based PII policy




Example of how to add a PII tag-based policy. In this example we create a tag-based policy for objects tagged "PII" in Atlas. Access to objects tagged "PII" is allowed for members of the "audit" group. All other users (the "public" group) are denied access.

#### Procedure

1. Select Access Manager > Tag Based Policies, then select a tag-based service.

2. On the List of Policies page, click Add New Policy.

The screenshot shows the Ranger Access Manager interface. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user 'admin' is logged in. The breadcrumb trail is 'Service Manager > tag\_service1 Policies'. Below this, there are tabs for 'Access' and 'Masking'. The main heading is 'List of Policies : tag\_service1'. A search bar is present with the placeholder text 'Search for your policy...'. To the right of the search bar is an 'Add New Policy' button, which is highlighted with a red rectangle. Below the search bar is a table with the following data:

Policy ID	Policy Name	Policy Labels	Status	Audit Logging	Roles	Groups	Users	Action
38	EXPIRES_ON	--	Enabled	Enabled	--	public	rangerlookup	  

The Create Policy page appears:

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > tag\_service1 Policies > Create Policy

### Create Policy

**Policy Details :**

Policy Type: **Access** ⓘ ⌵ Add Validity Period

Policy Name \*:  enabled normal

Policy Label:

TAG \*:

Description:

Audit Logging: **YES**

**Policy Conditions** +

No Conditions

**Allow Conditions :** hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="Select Users"/>	<span>Add Conditions</span> <span>+</span>	<span>Add Permissions</span> <span>+</span>	<span>×</span>
<span>+</span>					

⚠ Exclude from Allow Conditions : hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="Select Users"/>	<span>Add Conditions</span> <span>+</span>	<span>Add Permissions</span> <span>+</span>	<span>×</span>
<span>+</span>					

**Deny Conditions :** hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="Select Users"/>	<span>Add Conditions</span> <span>+</span>	<span>Add Permissions</span> <span>+</span>	<span>×</span>
<span>+</span>					

3. Enter the following information on the Create Policy page:

**Table 60: Policy Details**

Field	Description
Policy Type	Set to Access by default.
Policy Name	PII
TAG	PII
Audit Logging	YES
Description	Restrict access to resources with the PII tag.

**Table 61: Allow Conditions**

Label	Description
Select Group	audit
Select User	<none>



Label	Description
Policy Conditions	<none>
Component Permissions	hive (select all permissions)

**Table 62: Deny Conditions**

Label	Description
Select Group	public
Select User	<none>
Policy Conditions	<none>
Component Permissions	hive (select all permissions)

**Table 63: Exclude from Deny Conditions**

Label	Description
Select Group	audit
Select User	<none>
Policy Conditions	<none>

Label	Description
Component Permissions	hive (select all permissions)

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > cm\_tag Policies > Create Policy

### Create Policy

**Policy Details :**

Policy Type: **Access** ⓘ enabled normal ⊕ Add Validity Period

Policy Name \*: PII ⓘ

Policy Label: Policy Label

TAG \*: PII

Description: Restrict access to resources with the PII tag

Audit Logging: **YES**

**Policy Conditions** ⊕  
No Conditions

**Allow Conditions :** hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
Select Roles	audit	Select Users	Add Conditions <span>⊕</span>	HIVE	<span>×</span>
<span>⊕</span>					
<span>⚠</span> Exclude from Allow Conditions : <span>show</span>					

**Deny Conditions :** hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
Select Roles	public	Select Users	Add Conditions <span>⊕</span>	HIVE	<span>×</span>
<span>⊕</span>					
<span>⚠</span> Exclude from Deny Conditions : <span>hide</span>					

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
Select Roles	audit	Select Users	Add Conditions <span>⊕</span>	HIVE	<span>×</span>

In this example we used Allow Conditions to grant access to the "audit" group, and then used Deny Conditions to deny access to the "public" group. Because the "public" group includes all users, we then used Exclude from Deny Conditions to exclude the "audit" group, in effect reinstating the "audit" group's original Allow access condition.

- Click Add to add the new policy.

### Default EXPIRES\_ON tag policy

An EXPIRES\_ON tag-based policy is created automatically when a tag service instance created. This default policy denies access to objects tagged with EXPIRES\_ON after the expiry date specified in the Atlas tag attribute. You can use the following steps to review the default EXPIRES\_ON policy.

**Procedure**

1. Select Access Manager > Tag Based Policies, then select a tag-based service.

2. On the List of Policies page, click the Edit icon for the default EXPIRES\_ON policy.




**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager tag\_service1 Policies

Access Masking

List of Policies : tag\_service1

Search for your policy... Add New Policy

Policy ID	Policy Name	Policy Labels	Status	Audit Logging	Roles	Groups	Users	Action
38	EXPIRES_ON	--	Enabled	Enabled	--	public	rangerlookup	  

The Edit Policy page appears:

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > tag\_service1 Policies > Edit Policy

### Edit Policy

**Policy Details :**

Policy Type: **Access** ⓘ ⌕ Add Validity Period

Policy ID: **38**

Policy Name: EXPIRES\_ON ⓘ **enabled** **normal**

Policy Label:

TAG:

Description:

Audit Logging: **YES**

**Policy Conditions** +

No Conditions

**Allow Conditions :** hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
<input type="text" value="Select Roles"/>	<input type="text" value="Select Groups"/>	<input type="text" value="Select Users"/>	<span>Add Conditions</span> <span>+</span>	<span>Add Permissions</span> <span>+</span>	<span>✖</span>
<span>+</span>					
<span>⚠</span> Exclude from Allow Conditions : <span>show</span>					

**Deny Conditions :** hide

Select Role	Select Group	Select User	Policy Conditions	Component Permissions	
<input type="text" value="Select Roles"/>	<input type="text" value="x public"/>	<input type="text" value="x rangerlookup"/>	<input type="text" value="accessed-after-expiry : yes"/>	<div> <div>HDFS HBASE HIVE KMS KNOX</div> <div>STORM YARN KAFKA SOLR NIFI</div> <div>NIFI-REGISTRY ATLAS</div> </div>	<span>✖</span>
<span>+</span>					


3. We can see that the default EXPIRES\_ON policy denies access to all users, and for all components, after the expiry date specified in the Atlas tag attribute.

## Importing and exporting tag-based policies

You can export and import policies from the Ranger Admin UI for cluster resiliency (backups), during recovery operations, or when moving policies from test clusters to production clusters. You can import or export a specific subset of policies (such as those that pertain to specific resources or user/groups) or clone the entire repository (or multiple repositories) via the Ranger Admin UI.

### Interfaces

You can import and export policies from the Tag Based Policies page:

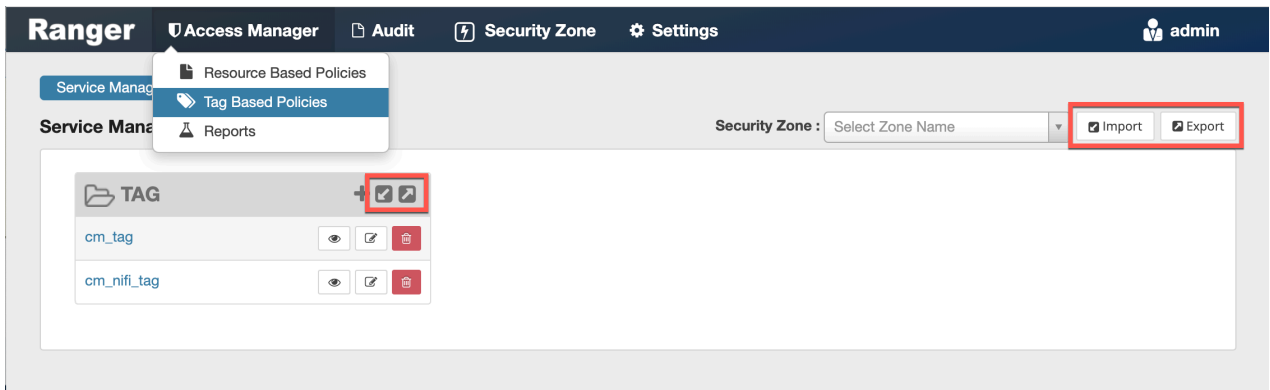

You can also export policies from the Reports page:

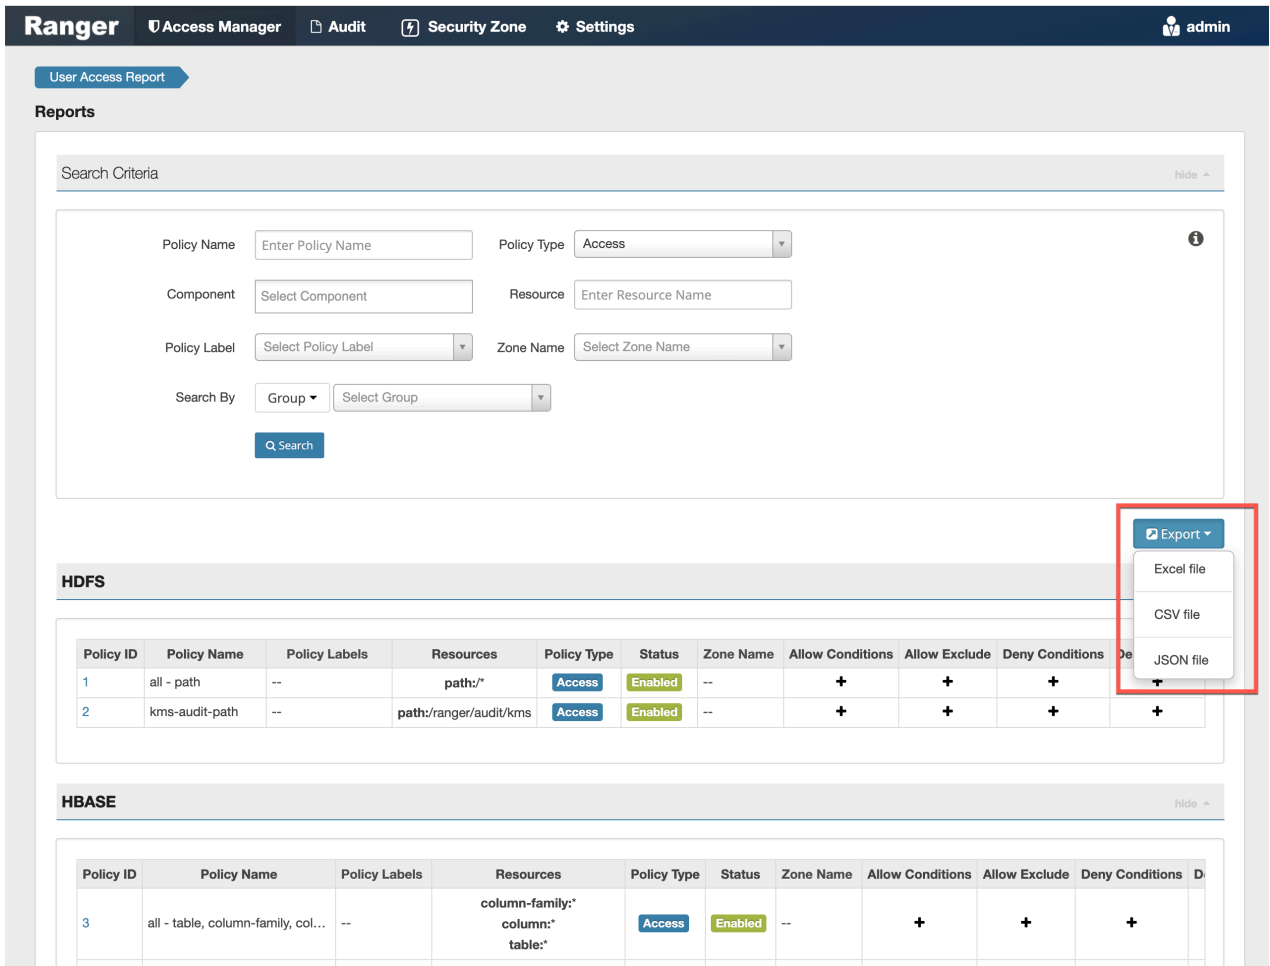


Table 64: Export Policy Options

	Service Manager Page	Reports Page
Formats	JSON	JSON Excel CSV
Filtering Supported	No	Yes
Specific Service Export	Yes	Via filtering

### Filtering

When exporting from the Reports page, you can apply filters before saving the file.

### Export Formats

You can export policies in the following formats:

- Excel
- JSON
- CSV

Note: CSV format is not supported for importing policies.

When you export policies from the Service Manager page, the policies are automatically downloaded in JSON format. If you wish to export in Excel or CSV format, export the policies from the Reports page dropdown menu.

### Required User Roles

The Ranger admin user can import and export only Resource & Tag based policies. The credentials for this user are set in Ranger Configs > Advanced ranger-env in the fields labeled admin\_username (default: admin/admin).

The Ranger KMS keyadmin user can import and export only KMS policies. The default credentials for this user are keyadmin/keyadmin.

### Limitations

To successfully import policies, use the following database versions:

- MariaDB: 10.1.16+
- MySQL: 5.6.x+
- Oracle: 11gR2+
- PostgreSQL: 8.4+
- MS SQL: 2008 R2+

Partial policy import is not supported.

### Related Information


[Importing and exporting resource-based policies](#)

## Import tag-based policies


How to import tag-based policies.

## Procedure

1. On the Tag Based Policies page, click one of the Import icons:

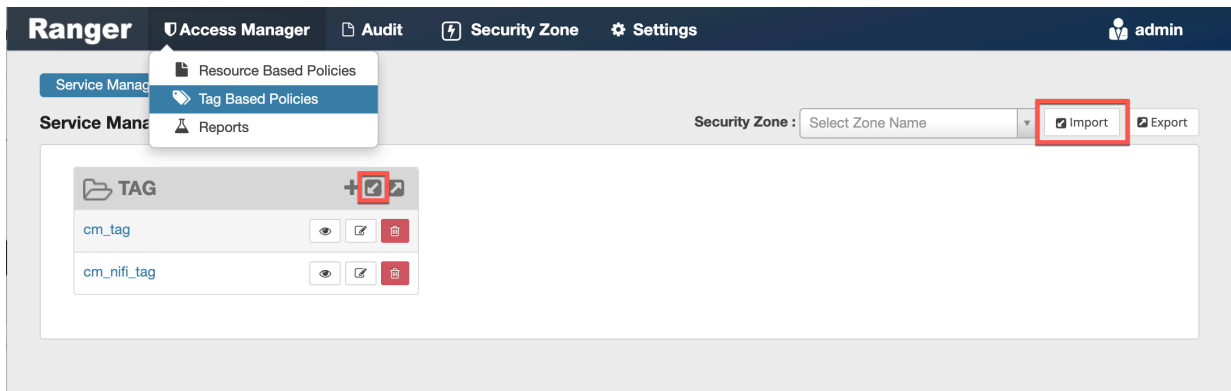

The Import Policy page appears.

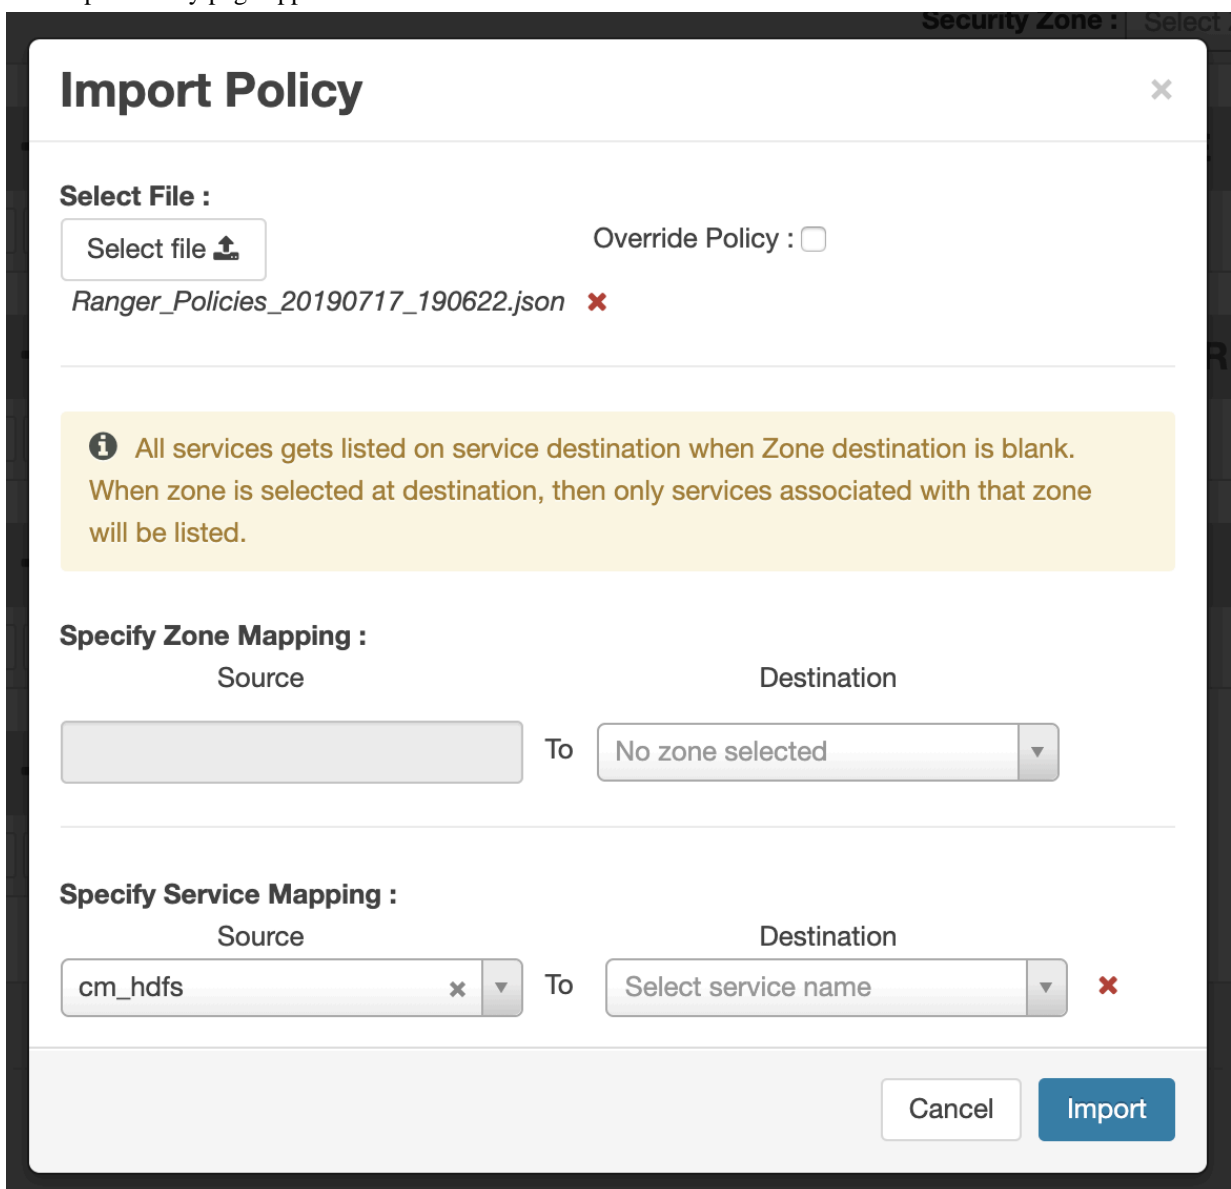

2. Select the file to import.  
You can only import policies in JSON format.



3. (Optional) Configure the import operation:

- a) The Override Policy option deletes all policies of the destination repositories.
- b) Zone Mapping – when no destination is selected, all services are imported. When a destination is selected, only the services associated with that security zone are imported.
- c) Service Mapping maps the downloaded file repository, i.e. source repository to destination repository. You can use the red x symbols to remove services from the import. Scroll down to view all service mappings.

**Import Policy**

**Specify Zone Mapping :**

Source: [ ] To Destination: [No zone selected]

**Specify Service Mapping :**

Source	To	Destination	
cm_hdfs	To	cm_hdfs	X
cm_hbase	To	cm_hbase	X
cm_yarn	To	cm_yarn	X
cm_hive	To	cm_hive	X
cm_knox	To	cm_knox	X
cm_storm	To	cm_storm	X

Cancel Import

4. Click Import.

A confirmation message appears after the file is imported.

**Related Information**

[Export tag-based policies](#)

**Export tag-based policies**

How to export all tag-based policies.

**About this task**

You can only export policies in JSON format from the Tag-based policies page. If you would like to export in Excel or CSV format, export the policies from the Reports page drop-down menu.


## Procedure

- From the Access Manager > Tag Based Policies page:
  - Click the Export button or icon:



The Export Policy page appears.

- Remove components or specific services, then click Export.

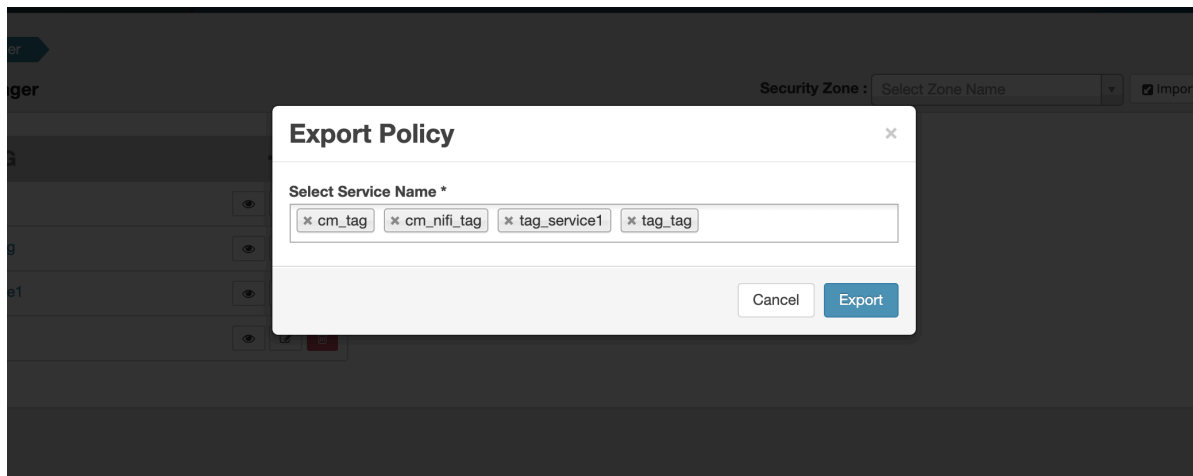

- The file downloads in your browser as a JSON file.

- From the Reports page:
  - Filter Component to tag and click Search.
  - (Optional) Apply filters before exporting the file.
  - Open the Export drop-down menu:

The screenshot shows the Ranger Reports page. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user is logged in as 'admin'. The 'Reports' section is active, showing 'User Access Report'. Below this is the 'Search Criteria' section with fields for Policy Name, Policy Type (Access), Component (tag), Resource, Policy Label, Zone Name, and Search By (Group). A 'Search' button is present. Below the search criteria is the 'TAG' table. The table has columns: Policy ID, Policy Name, Policy Labels, Resources, Policy Type, Status, Zone Name, Allow Conditions, Allow Exclude, Deny Conditions, and Deny Exclude. The table contains four rows of data for policies 27, 39, 5, and 38, all with 'EXPIRES\_ON' names and 'tag:EXPIRES\_ON' resources. The 'Status' column shows 'Enabled' for all. The 'Export' dropdown menu is open, showing options for 'Excel file', 'CSV file', and 'JSON file'.

- Select the file format.  
The file downloads in your browser.

## Create a time-bound policy

Ranger policy validity periods enable you to configure a policy to be effective for a specified time range. You can add a validity period to both resource-based and tag-based policies.

### About this task

Time-bound policy use-case examples:

- To restrict access to sensitive financial information until the earnings release date.
- To block a certain user for a specific time period (e.g., a compromised user account being investigated needs to be put on "hold" from accessing resources in Hadoop services).
- To block a certain group for a specific time (e.g., excluding temporary employees from writing on resources during the holiday season).



**Note:** The following procedure shows how to create a time-bound resource-based policy. The procedure is essentially the same for a tag-based resource policy.

## Procedure

1. On the Ranger Service Manger page, select a service, then click Add New Policy.
2. Complete the fields on the **Create Policy** page.
3. Click Add Validity Period.
4. On the **Policy Validity Period** pop-up, specify a start time, end time, and time zone. To add additional validity periods, click the + symbol. Click Save to save the specified validity periods.

The screenshot shows a 'Policy Validity Period' pop-up window. The window has a title bar with a close button (X). Inside, there are three columns: 'Start Time', 'End Time', and 'Time zone'. The 'Start Time' field contains '2019/07/22 09:00:15' with a clear (X) and a calendar icon. The 'End Time' field contains '2019/08/31 09:09:15' with a clear (X) and a calendar icon. The 'Time zone' field contains 'America/Los\_Angel...' with a dropdown arrow, a clear (X), and a red delete button. Below these fields is a '+' button to add more periods. At the bottom right are 'Cancel' and 'Save' buttons. The background shows a 'Create Policy' page with various fields like 'Policy Type', 'Policy Name', 'Policy Label', 'Base Table', and 'n-family'.

5. If you would like the policy to override all other policies during its validity period, select override.

**Ranger** Access Manager Audit Security Zone Settings admin

Service Manager > cm\_hbase Policies > Create Policy

**Create Policy**

**Policy Details :**

Policy Type: Access Add Validity Period

Policy Name \*: Temp Employees Override enabled **override**

Policy Label: Policy Label

HBase Table \*: sales include

HBase Column-family \*: include

HBase Column \*: include

Description:

Audit Logging: YES

**Allow Conditions :** hide

Select Role	Select Group	Select User	Permissions	Delegate Admin	
Select Roles	temp_employees	Select Users	Read	<input type="checkbox"/>	<input type="button" value="x"/>

+ Exclude from Allow Conditions : show

**Deny Conditions :** show

Add Cancel

6. Click Add.

## Ranger Security Zones

Ranger security zones let you organize service resources into multiple security zones.

### Overview

Ranger Security Zones overview.

What is a Security Zone?

Lets you organize resource and tag-based services and policies into separate security zones. You can assign one or more administrators for each security zone. Security zone administrators can then create and update policies for their security zone.

For example, let us consider two security zones: "finance" and "sales":

- Security zone "finance" includes all content in a "finance" Hive database.
- Security zone "sales" includes all content in a "sales" Hive database.
- Sets of users and groups are designated as administrators in each security zone.
- Users are allowed to set up policies only in security zones in which they are administrators.
- Policies defined in a security zone are applicable only for resources of that zone.
- A zone can be extended to include resources from multiple services such as HDFS, Hive, HBase, Kafka, etc., allowing administrators of a zone to set up policies for resources owned by their organization across multiple services.

```
Zone: finance
service: prod_hdfs; path=/finance/*, /taxes/*
service: prod_hive; database=finance
service: prod_kafka; topic=FIN_*
service: test_hadoop; path=/finance/*, /taxes/*
Zone: sales
service: prod_hdfs; path=/sales/*
service: prod_hive; database=sales
service: prod_kafka; topic=SALES_*
```

- As shown above, resources can be specified using wildcards (FIN\_\*, SALES\_\*).
- A resource is not mappable to more than one security zone. Ranger does not allow creation of security zones that specify resources that match resources in another zone. For example, an attempt to update the "finance" zone above with the HDFS path /sales/finance/\* is not permitted, as this conflicts with the HDFS path /sales/\* specified in the "sales" zone.
- A set of users and groups can be designated as administrators of a security zone. Administrators can create, update, and delete security policies for the resources in the security zone.
- A set of users and groups can be authorized to view audit logs of access to a security zone's resources. Other users are not allowed to view access-audit logs of the security zone resources.

#### Security Zone Administration

- Security zones can only be created, updated, or deleted by a user with the ROLE\_SYS\_ADMIN role in Ranger.
- Users can view, retrieve, and update policies only in security zones in which they have administrator privileges.

#### How are Security Zones Used in Authorization?

When a Ranger authorization plugin authorizes a resource access request, it first determines the zone in which the accessed resource resides. If the resource matches a security zone, only the policies of that security zone are used to authorize the access. If resource does not match any security zone, the policies in the default (unnamed) security zone are used to authorize the access.

#### Tag-based Policies in Security Zones

In a given service, each security zone can be configured to use tag-based policies from a specific security zone in a tag-service. This enables tag-based authorization policies to be used based on the security zone of the resource.

#### Audit Logs

Audit logs generated by Ranger include the name of the security zone in which the accessed resource resides. Only users who have been assigned as an Admin or Auditor for the security zone are allowed to view the audit logs.

## Adding a Ranger security zone

How to add a new Ranger Security Zone.

### Procedure

1. Click Security Zone in the top menu.

The Security Zone page appears.

- On the Security Zone page, click the + icon.

The screenshot shows the Ranger Security Zones page. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user 'admin' is logged in. On the left, under 'Security Zones', there is a search bar and a list containing 'security-zone1'. A blue arrow points to a '+' icon next to the list. The main area displays the details for 'security-zone1'.

**Create Zone**

Security Zones

Search

security-zone1

Zone Administration

Admin Users: admin

Admin Usergroups: --

Auditor Users: auditor1

Auditor Usergroups: --

Zone Tag Services

cm\_tag

Services

Service Name	Service Type	Resource
cm_hive	HIVE	database : hive

The Create Zone page appears.

The screenshot shows the 'Create Zone' page in Ranger. The top navigation bar is the same as the previous screenshot. The breadcrumb shows 'Security Zone' > 'Create Zone'. The page title is 'Create Zone'.

**Zone Details :**

Zone Name \*: security-zone2

Zone Description:

**Zone Administration :**

Admin Users: x admin

Admin Usergroups: Select Group

Auditor Users: x auditor1

Auditor Usergroups: Select Group

**Services :**

Select Tag Services: x cm\_tag

Select Resource Services \*: x cm\_hive

Service Name	Service Type	Resource
cm_hive	HIVE	+

Save Cancel

3. Complete the Create Zone page as follows:

**Table 65: Zone Details**

Field	Description
Zone Name	The security zone name.
Zone Description	An optional description.

**Table 66: Zone Administration**

Field	Description
Admin Users	The Admin users for the security zone.
Admin Usergroups	The Admin user groups for the security zone.
Auditor Users	The Auditor users for the security zone.
Auditor Usergroups	The Auditor user groups for the security zone.

**Table 67: Services**

Label	Description
Select Tag Services	Select tag-based services for the security zone.
Select Resource Services	Select resource-based services for the security zone.

4. Selected Services are listed in the Services table. To add resources for each selected service, click the + icon in the Resources column for the applicable service.

**Ranger** Access Manager Audit Security Zone Settings admin

Security Zone > Create Zone

**Create Zone**

**Zone Details :**

Zone Name \* security-zone2

Zone Description

**Zone Administration :**

Admin Users x admin

Admin Usergroups Select Group

Auditor Users x auditor1

Auditor Usergroups Select Group

**Services :**

Select Tag Services x cm\_tag

Select Resource Services \* x cm\_hive


Service Name	Service Type	Resource
cm_hive	HIVE	+

Save Cancel

**Add Resources**




5. Use the Add/Edit Resources pop-up to specify resources for the service, then click Save.

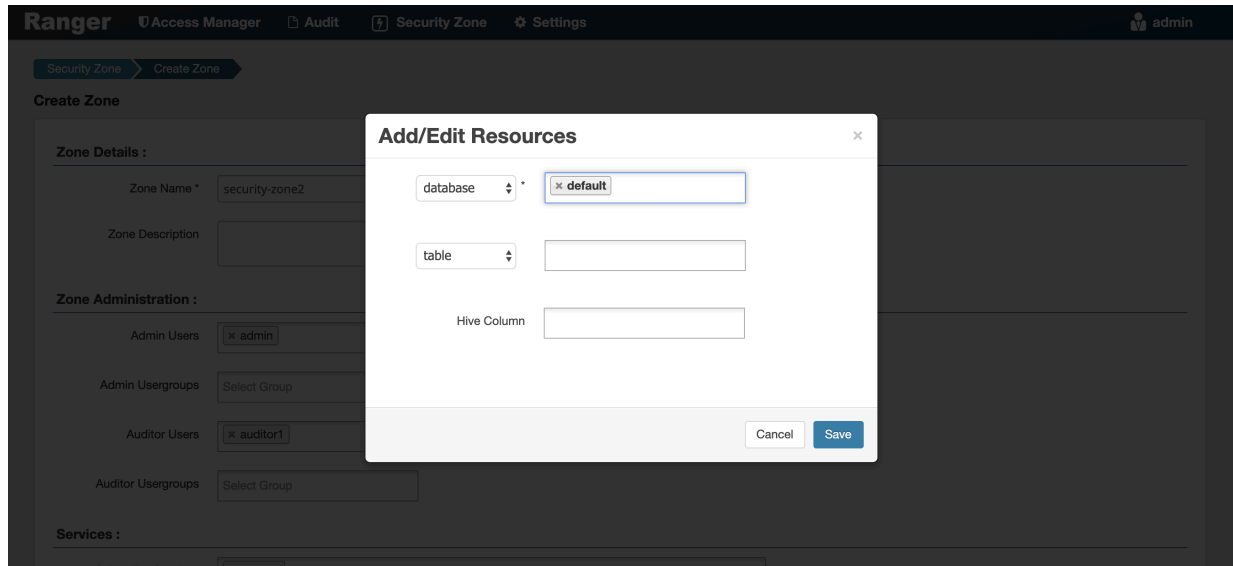


The resources are listed in the Resources column of the Services table.


6. Click Save at the bottom of the Create Zone page to save the new security zone.

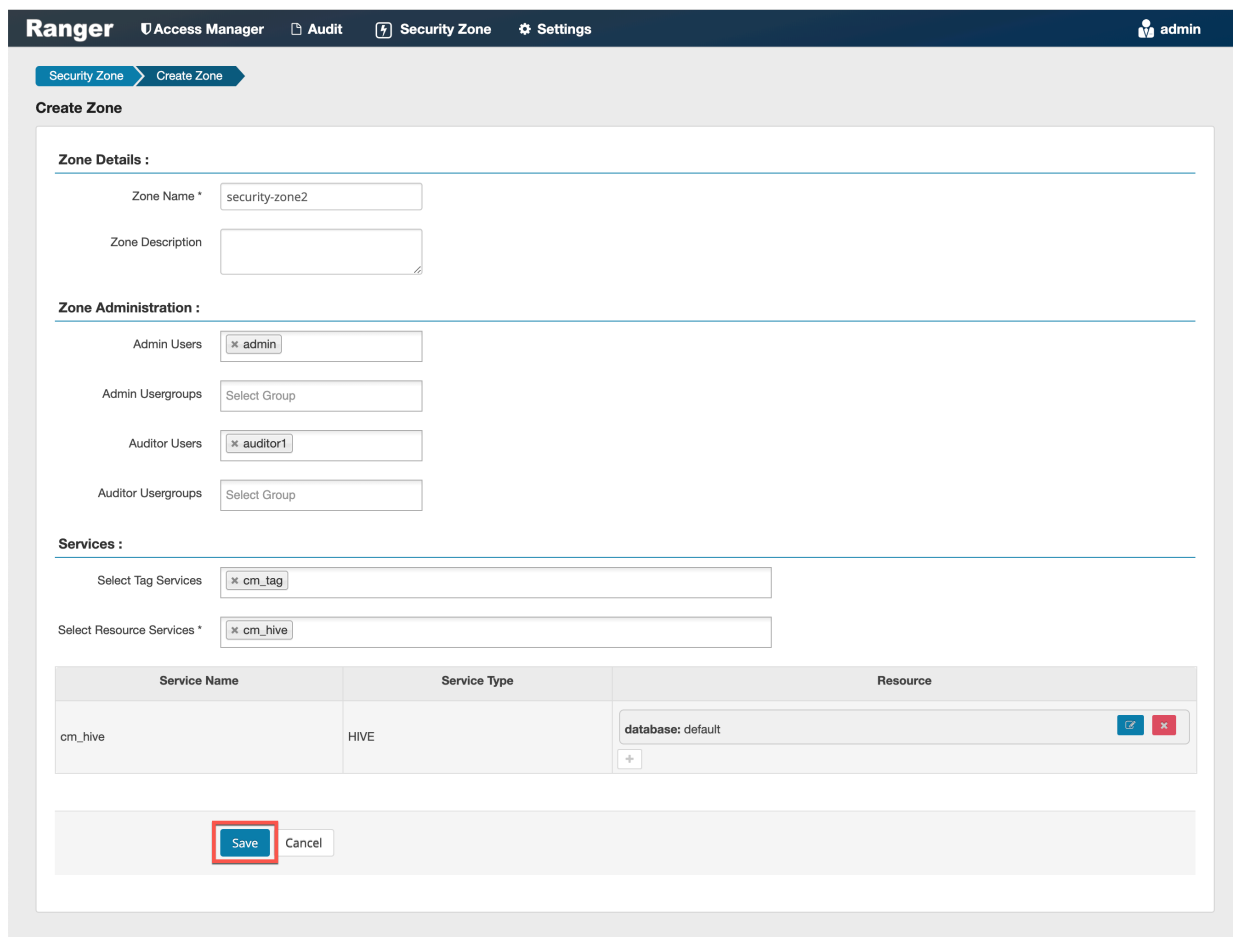

7. The new security zone is listed on the Security Zone page.

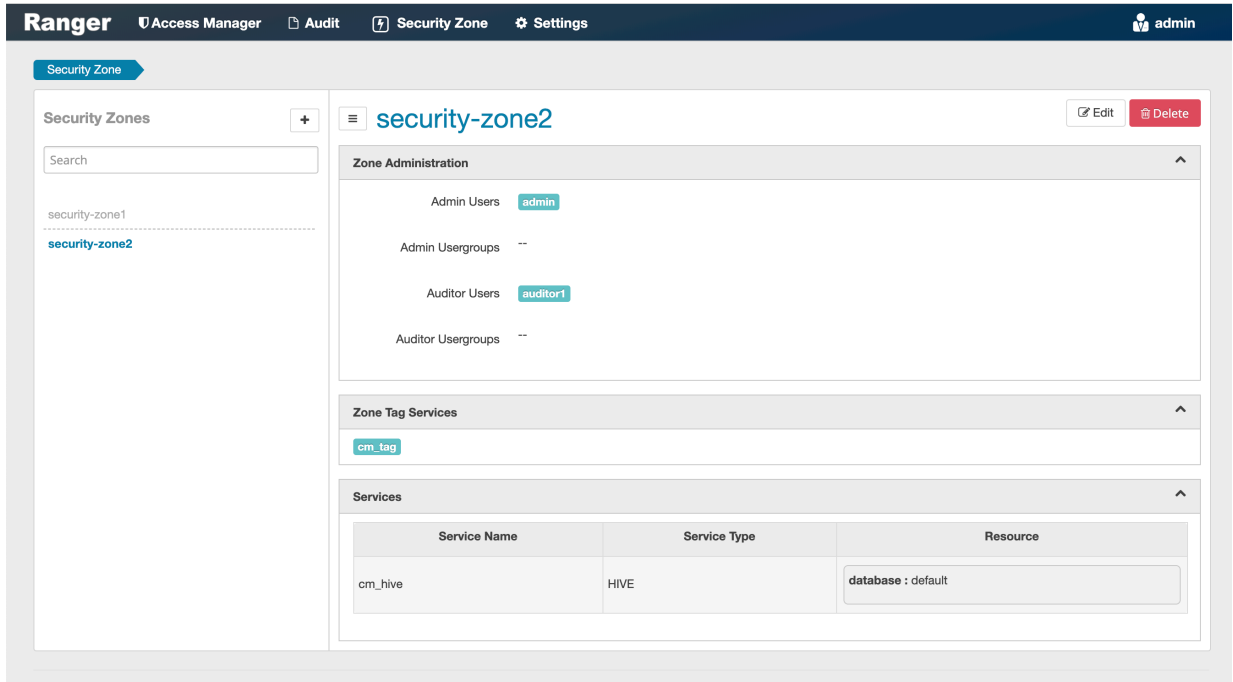

8. To edit a security zone, click the security zone name in the Security Zones list, then click Edit.
9. After security zones have been created, you can use the Security Zone selection box on the Service Manager page to display the services assigned to the selected security zone. A Zone Name column appears in the table on the Audit > Access page, and also in the Access Manager > Reports tables.

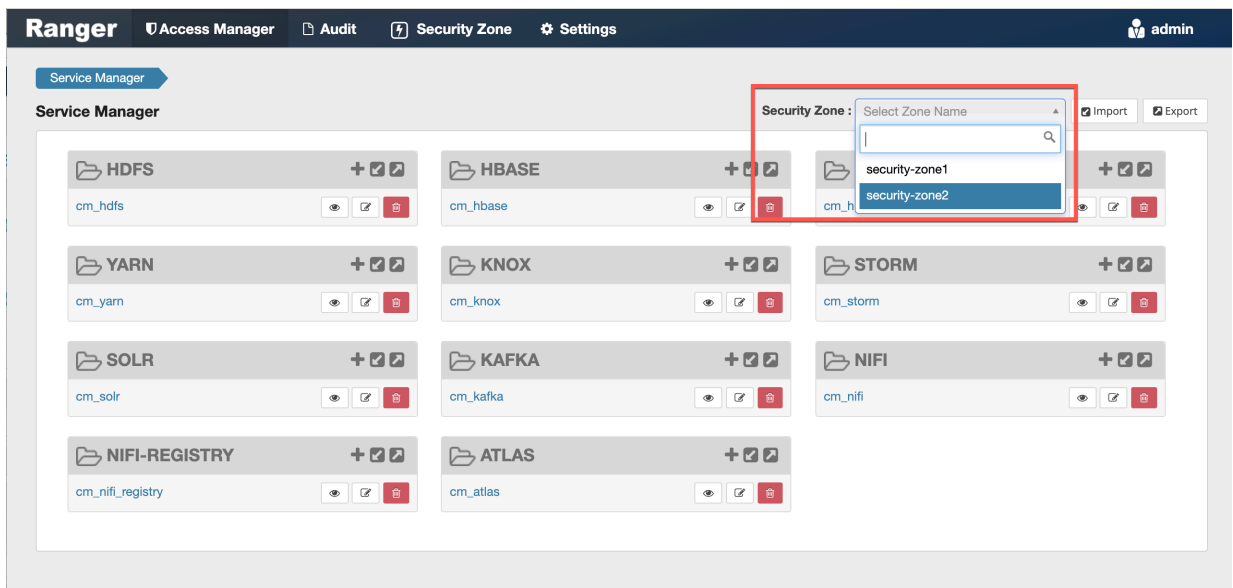

## Administering Ranger Users, Groups, Roles, and Permissions

To view a list of the users, groups, and roles that can access the Ranger portal or its services, select Settings > Users/Groups/Roles from the Ranger top menu.

## What is a Role ?

A role is a set of permissions that you assign to a user, group, or another role. You assign a role by adding a user, group or role to it. By adding multiple roles, you create a role hierarchy in which you manage permission sets at the role level. For example, your workflow to create a role hierarchy:

1. Create a new role.
2. Add permissions to the role. For example, in Hadoop SQL, create a policy for a table that provides necessary permissions and add the role in the Role selector of Allow.
3. Repeat #2 until you have assigned all permissions.
4. Add users, groups, or other roles to the new role, which assigns the permission set to that role.

Benefits that roles provide in a large environment:

- A role may include many permissions, all of which may be granted or revoked to a user or group using a single command.
- Adding or revoking a single permission to or from a role requires a single command, which also applies to all users and groups with that role.
- Roles allow for some documentation about why a permission is granted or revoked.

In other words, a role is a collection of permissions. A group is a collection of users. You create a role and add permissions to it. Then, you grant that role to a group. Roles present an easier way to manage a set of permissions based on specific access criteria.

## Example Ranger Role hierarchy

A simple example of a role hierarchy follows:

- FinReadOnly role, which gives read permission on all tables in the Finance database and is defined by a Ranger policy that grants read on database:Finance, table:\* to the FinReadOnly role.
- FinWrite role, which gives write permission on all tables in the Finance database and is defined by a Ranger policy that grants write on database:Finance, table:\* to the FinWrite role.
- FinReadWrite role, which role is granted both the FinRead and FinWrite roles and thereby inherits read and write permission to all tables in the Finance database.
- FinReporting group whose users require only read permission to the Finance tables. FinReporting group is added to FinReadOnly role in Ranger.
- FinDataPrep group whose users require only write permission to the Finance tables. FinDataPrep group is added to the FinWrite role in Ranger.
- FinPowerUser group whose users require read and write permission to all Finance tables. FinPowerUsers group is added to the FinReadWrite role in Ranger.

## Overview of the Ranger Roles feature

The Users/Groups/Roles page lists:

- Internal users who can log in to the Ranger portal; created by the Ranger console Service Manager.
- External users who can access services controlled by the Ranger portal; created at other systems such as Active Directory, LDAP, or UNIX, and synched with those systems.
- Admin users who are the only users with permission to create users and services, run reports, and perform other administrative tasks. Admin users can also create child policies based on the original policy (base policy).
- On the Groups page, you can click the people icons in the Users column to view the members of the applicable group.
- On the Roles page, you can view the roles that have been mapped to users and groups. Roles are application-managed and are easier to apply changes than users and groups.

**Ranger** Access Manager Audit Security Zone Settings admin

Users/Groups/Roles

Users Groups Roles

**Group List**

Search for your groups... Add New Group Set Visibility

<input type="checkbox"/>	Group Name	Group Source	Visibility	Users
<input type="checkbox"/>	livy	External	Visible	
<input type="checkbox"/>	chrony	External	Visible	
<input type="checkbox"/>	druid	External	Visible	
<input type="checkbox"/>	kafka	External	Visible	
<input type="checkbox"/>	knoxui	External	Visible	
<input type="checkbox"/>	hdfs	External	Visible	
<input type="checkbox"/>	hue	External	Visible	
<input type="checkbox"/>	sqoop	External	Visible	
<input type="checkbox"/>	yarn	External	Visible	
<input type="checkbox"/>	centos	External	Visible	
<input type="checkbox"/>	adm	External	Visible	
<input type="checkbox"/>	systemd-journal	External	Visible	
<input type="checkbox"/>	knox	External	Visible	
<input type="checkbox"/>	mapred	External	Visible	
<input type="checkbox"/>	tez	External	Visible	
<input type="checkbox"/>	audit	Internal	Visible	
<input type="checkbox"/>	temp_employees	Internal	Visible	

« < 1 2 > »

## Add a user

How to add a new Ranger user.

## Procedure

1. Select Settings > Users/Groups/Roles.

The Users/Groups/Roles page appears.

**Ranger** Access Manager Audit Security Zone Settings admin

Users/Groups/Roles

Users Groups Roles

**User List**

Search for your users... Add New User Set Visibility

	User Name	Email Address	Role	User Source	Groups	Visibility
<input type="checkbox"/>	admin		Admin	Internal	--	Visible
<input type="checkbox"/>	rangerusersync		Admin	Internal	--	Visible
<input type="checkbox"/>	rangertagsync		Admin	Internal	--	Visible
<input type="checkbox"/>	hive		User	External	hive	Visible
<input type="checkbox"/>	cloudera-scm		User	External	wheel cloudera-scm	Visible
<input type="checkbox"/>	https		User	External	https	Visible
<input type="checkbox"/>	superset		User	External	superset	Visible
<input type="checkbox"/>	atlas		User	External	hadoop atlas	Visible
<input type="checkbox"/>	ranger		User	External	hadoop ranger	Visible
<input type="checkbox"/>	kudu		User	External	kudu	Visible
<input type="checkbox"/>	kms		User	External	kms	Visible
<input type="checkbox"/>	accumulo		User	External	accumulo	Visible

2. Click Add New User .

The User Detail page appears.

**Ranger** Access Manager Audit Security Zone Settings admin

Users/Groups/Roles User Create

**User Detail**

User Name \* auditor1 ⓘ

New Password \* ..... ⓘ

Password Confirm \* ..... ⓘ

First Name \* Audrey ⓘ

Last Name ..... ⓘ

Email Address ..... ⓘ

Select Role \* Auditor ⓘ

Group audit ⓘ

Save Cancel

3. Add the required user details, then click Save.  
The user is immediately added to the list.

## Edit a user

How to edit a user in Ranger.

## Procedure

1. Select Settings > Users/Groups/Roles.  
The Users/Groups page opens to the Users tab.

The screenshot shows the Ranger web interface. At the top is a navigation bar with 'Ranger' and links to 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user 'admin' is logged in. Below the navigation bar is a breadcrumb 'Users/Groups/Roles' and three tabs: 'Users' (selected), 'Groups', and 'Roles'. The main section is titled 'User List' and contains a search bar 'Search for your users...', an 'Add New User' button, a 'Set Visibility' dropdown, and a trash icon. Below this is a table of users.

<input type="checkbox"/>	User Name	Email Address	Role	User Source	Groups	Visibility
<input type="checkbox"/>	admin		Admin	Internal	--	Visible
<input type="checkbox"/>	rangerusersync		Admin	Internal	--	Visible
<input type="checkbox"/>	rangertagsync		Admin	Internal	--	Visible
<input type="checkbox"/>	hive		User	External	hive	Visible
<input type="checkbox"/>	cloudera-scm		User	External	wheel cloudera-scm	Visible
<input type="checkbox"/>	https		User	External	https	Visible
<input type="checkbox"/>	superset		User	External	superset	Visible
<input type="checkbox"/>	atlas		User	External	hadoop atlas	Visible
<input type="checkbox"/>	ranger		User	External	hadoop ranger	Visible
<input type="checkbox"/>	kudu		User	External	kudu	Visible
<input type="checkbox"/>	kms		User	External	kms	Visible
<input type="checkbox"/>	accumulo		User	External	accumulo	Visible

2. Select a user profile to edit. To edit your own profile, select your user name, then click Profile.

**Edit your own profile** → Profile

**Edit a user profile**

	User Name	Email Address	Role	User Source	Groups	Visibility
<input type="checkbox"/>	admin		Admin	Internal	--	Visible
<input type="checkbox"/>	rangerusersync		Admin	Internal	--	Visible
<input type="checkbox"/>	rangertagsync		Admin	Internal	--	Visible
<input type="checkbox"/>	hive		User	External	hive	Visible
<input type="checkbox"/>	cloudera-scm		User	External	wheel cloudera-scm	Visible
<input type="checkbox"/>	httpfs		User	External	httpfs	Visible
<input type="checkbox"/>	superset		User	External	superset	Visible
<input type="checkbox"/>	atlas		User	External	hadoop atlas	Visible
<input type="checkbox"/>	ranger		User	External	hadoop ranger	Visible
<input type="checkbox"/>	kudu		User	External	kudu	Visible

The User Detail page appears.

**User Detail**

**Basic Info** **Change Password**

User Name \* rangerusersync ⓘ

First Name \* rangerusersync ⓘ

Last Name ⓘ

Email Address ⓘ

Select Role \* Admin ▾

Group Please select ⓘ

Save Cancel



**Note:**

You can only fully edit internal users. For external users, you can only edit the user role.

3. Edit the user details, then click Save.

## Delete a user

How to delete a user in Ranger.

### Before you begin


Only users with the "admin" role can delete a user.

## Procedure

1. Select Settings > Users/Groups.  
The Users/Groups page appears.

The screenshot shows the Ranger web interface. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user 'admin' is logged in. The 'Users/Groups/Roles' section is active, with 'Users' selected. The 'User List' table is displayed with the following data:

	User Name	Email Address	Role	User Source	Groups	Visibility
<input type="checkbox"/>	admin		Admin	Internal	--	Visible
<input type="checkbox"/>	rangerusersync		Admin	Internal	--	Visible
<input type="checkbox"/>	rangertagsync		Admin	Internal	--	Visible
<input type="checkbox"/>	hive		User	External	hive	Visible
<input type="checkbox"/>	cloudera-scm		User	External	wheel cloudera-scm	Visible
<input type="checkbox"/>	https		User	External	https	Visible
<input type="checkbox"/>	superset		User	External	superset	Visible
<input type="checkbox"/>	atlas		User	External	hadoop atlas	Visible
<input type="checkbox"/>	ranger		User	External	hadoop ranger	Visible
<input type="checkbox"/>	kudu		User	External	kudu	Visible
<input type="checkbox"/>	kms		User	External	kms	Visible
<input type="checkbox"/>	accumulo		User	External	accumulo	Visible

2. Select the check box of the user you want to delete, then click the Delete icon (  ) at the right of the User List menu bar.

The screenshot shows the same Ranger web interface as before, but with the 'rangertagsync' user selected (checkbox checked). The 'Delete' icon (trash can) in the top right of the 'User List' section is highlighted with a red box.

3. Click OK on the confirmation pop-up.

## Add a group

How to add a group in Ranger.



## Procedure

1. Select Settings > Users/Groups/Roles, then click the Groups tab.  
The Groups page appears.

**Ranger** Access Manager Audit Security Zone Settings admin

Users/Groups/Roles

Users Groups Roles

**Group List**

Search for your groups...

Add New Group Set Visibility

	Group Name	Group Source	Visibility	Users
<input type="checkbox"/>	livy	External	Visible	
<input type="checkbox"/>	chrony	External	Visible	
<input type="checkbox"/>	druid	External	Visible	
<input type="checkbox"/>	kafka	External	Visible	
<input type="checkbox"/>	knoxui	External	Visible	
<input type="checkbox"/>	hdfs	External	Visible	
<input type="checkbox"/>	hue	External	Visible	
<input type="checkbox"/>	sqoop	External	Visible	
<input type="checkbox"/>	yarn	External	Visible	
<input type="checkbox"/>	centos	External	Visible	
<input type="checkbox"/>	adm	External	Visible	
<input type="checkbox"/>	systemd-journal	External	Visible	
<input type="checkbox"/>	knox	External	Visible	
<input type="checkbox"/>	mapred	External	Visible	
<input type="checkbox"/>	tez	External	Visible	
<input type="checkbox"/>	audit	Internal	Visible	
<input type="checkbox"/>	temp_employees	Internal	Visible	

« < 1 2 > »

2. Click Add New Group.  
The Group Create page appears.

**Ranger** Access Manager Audit Security Zone Settings admin

Users/Groups/Roles > Group Create

**Group Detail**

Group Name \*

Description

Save Cancel


3. Enter a unique name for the group and an optional description, then click Save.

## Edit a group

How to edit a group in Ranger.

## Procedure

1. Select Settings > Users/Groups/Roles, then click the Groups tab.  
The Groups page appears.

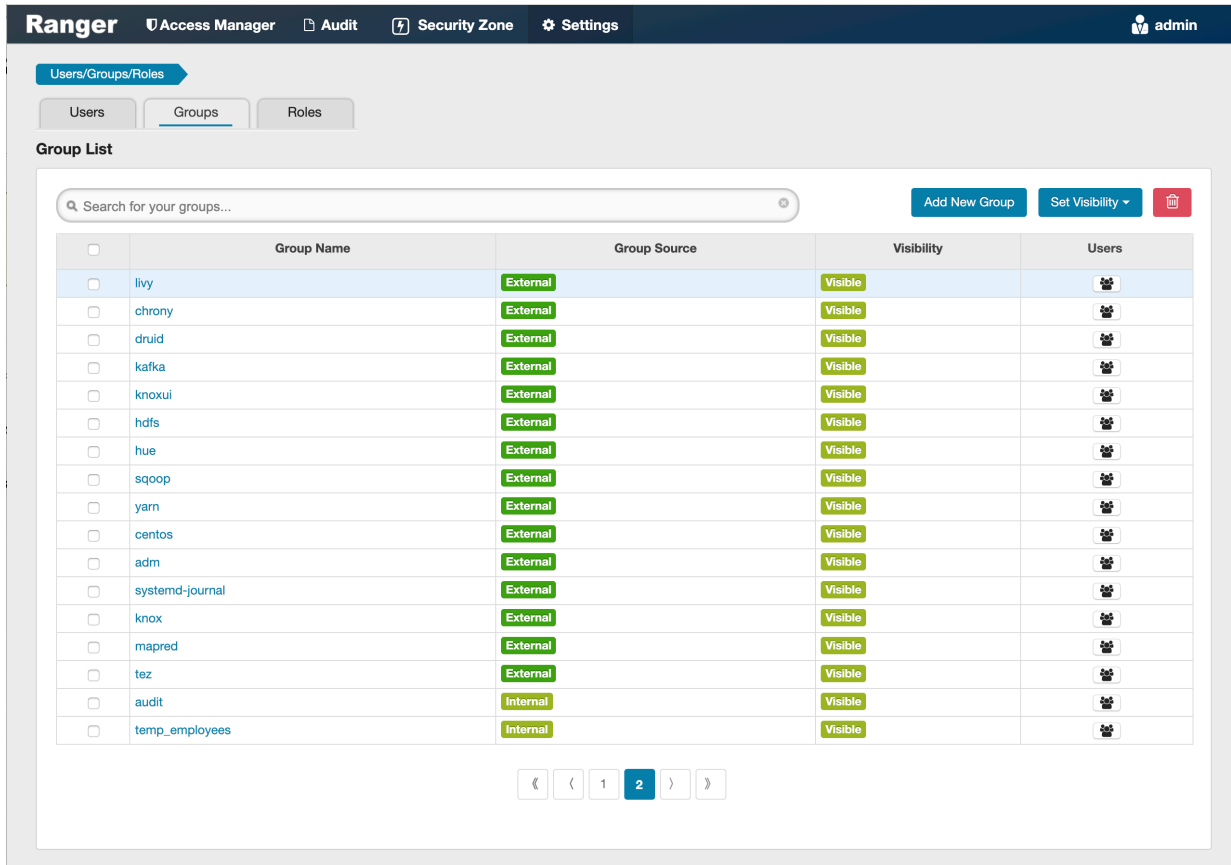


The screenshot shows the Ranger web interface. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', 'Settings', and a user profile 'admin'. The 'Users/Groups/Roles' section is active, with the 'Groups' tab selected. Below the tabs, the 'Group List' is displayed. A search bar at the top of the list says 'Search for your groups...'. To the right of the search bar are buttons for 'Add New Group', 'Set Visibility', and a trash icon. The table below lists various groups with columns for checkboxes, Group Name, Group Source, Visibility, and Users.

<input type="checkbox"/>	Group Name	Group Source	Visibility	Users
<input type="checkbox"/>	lvy	External	Visible	
<input type="checkbox"/>	chrony	External	Visible	
<input type="checkbox"/>	druid	External	Visible	
<input type="checkbox"/>	kafka	External	Visible	
<input type="checkbox"/>	knoxui	External	Visible	
<input type="checkbox"/>	hdfs	External	Visible	
<input type="checkbox"/>	hue	External	Visible	
<input type="checkbox"/>	sqoop	External	Visible	
<input type="checkbox"/>	yarn	External	Visible	
<input type="checkbox"/>	centos	External	Visible	
<input type="checkbox"/>	adm	External	Visible	
<input type="checkbox"/>	systemd-journal	External	Visible	
<input type="checkbox"/>	knox	External	Visible	
<input type="checkbox"/>	mapred	External	Visible	
<input type="checkbox"/>	tez	External	Visible	
<input type="checkbox"/>	audit	Internal	Visible	
<input type="checkbox"/>	temp_employees	Internal	Visible	

At the bottom of the table, there are pagination controls: '<<', '<', '1', '2' (highlighted), '>', '>>'.

2. Select a group name to edit.

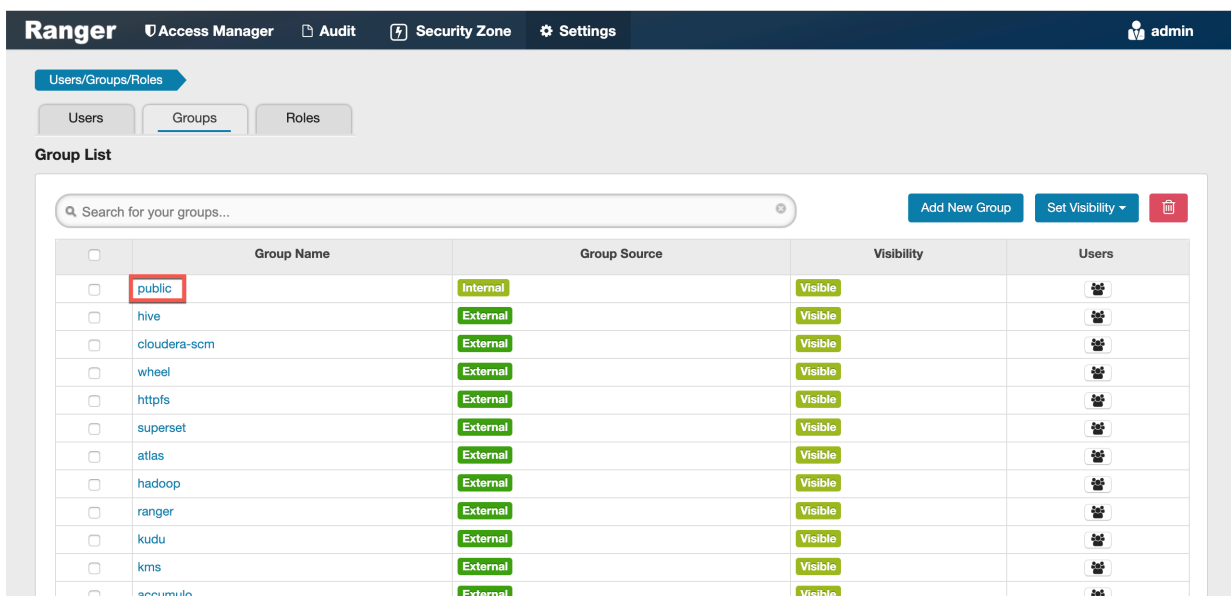

This screenshot is similar to the previous one, showing the Ranger Groups page. However, the 'public' group in the first row of the table is highlighted with a red rectangle. The rest of the interface, including the navigation bar, tabs, and other groups in the table, remains the same.

<input type="checkbox"/>	Group Name	Group Source	Visibility	Users
<input type="checkbox"/>	public	Internal	Visible	
<input type="checkbox"/>	hive	External	Visible	
<input type="checkbox"/>	cloudera-scm	External	Visible	
<input type="checkbox"/>	wheel	External	Visible	
<input type="checkbox"/>	https	External	Visible	
<input type="checkbox"/>	superset	External	Visible	
<input type="checkbox"/>	atlas	External	Visible	
<input type="checkbox"/>	hadoop	External	Visible	
<input type="checkbox"/>	ranger	External	Visible	
<input type="checkbox"/>	kudu	External	Visible	
<input type="checkbox"/>	kms	External	Visible	
<input type="checkbox"/>	accumulo	External	Visible	

- The Group Edit page appears.

**Ranger** Access Manager Audit Security Zone Settings admin

Users/Groups/Roles > Group Edit

**Group Detail**

Group Name \* public ⓘ

Description public group

Save Cancel

- Edit the group details, then click Save.

## Delete a group

How to delete a group in Ranger.

### Before you begin

Only users with the "admin" role can delete a group.

### Procedure

- Select Settings > Users/Groups/Roles, then click the Groups tab. The Groups page appears.

**Ranger** Access Manager Audit Security Zone Settings admin

Users/Groups/Roles

Users Groups Roles

**Group List**


Search for your groups...


Add New Group Set Visibility

	Group Name	Group Source	Visibility	Users
<input type="checkbox"/>	livy	External	Visible	
<input type="checkbox"/>	chrony	External	Visible	
<input type="checkbox"/>	druid	External	Visible	
<input type="checkbox"/>	kafka	External	Visible	
<input type="checkbox"/>	knoxui	External	Visible	
<input type="checkbox"/>	hdfs	External	Visible	
<input type="checkbox"/>	hue	External	Visible	
<input type="checkbox"/>	sqoop	External	Visible	
<input type="checkbox"/>	yarn	External	Visible	
<input type="checkbox"/>	centos	External	Visible	
<input type="checkbox"/>	adm	External	Visible	
<input type="checkbox"/>	systemd-journal	External	Visible	
<input type="checkbox"/>	knox	External	Visible	
<input type="checkbox"/>	mapred	External	Visible	
<input type="checkbox"/>	tez	External	Visible	
<input type="checkbox"/>	audit	Internal	Visible	
<input type="checkbox"/>	temp_employees	Internal	Visible	

« < 1 2 > »

2.

Select the check box of the group you want to delete, then click the Delete icon () at the right of the Group List menu bar.

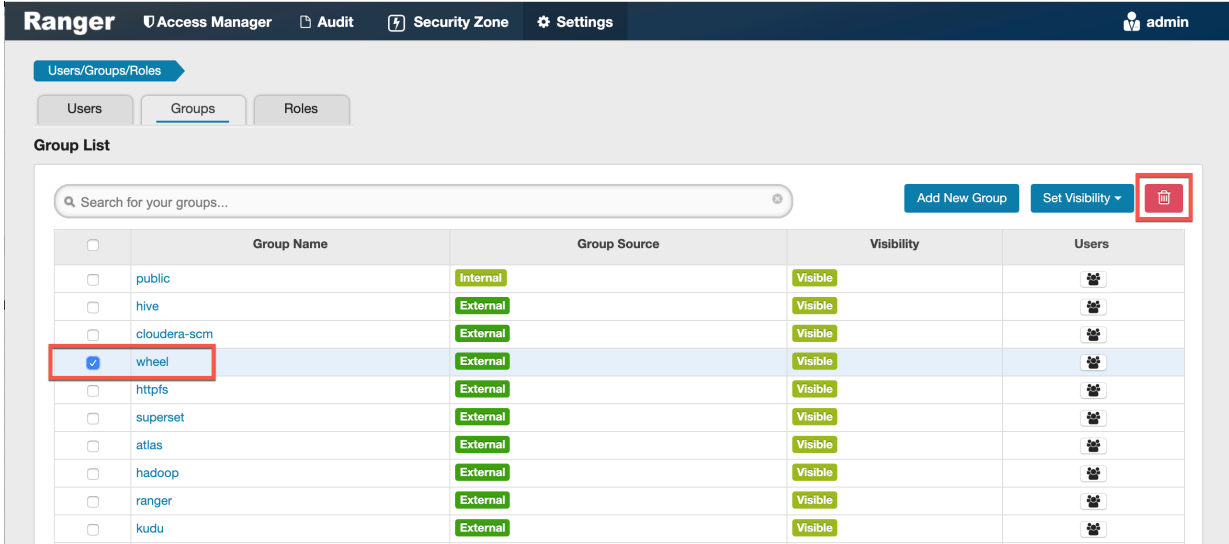

The screenshot shows the Ranger Admin console interface. At the top, there's a navigation bar with 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. Below this, there's a 'Users/Groups/Roles' section with tabs for 'Users', 'Groups', and 'Roles'. The 'Groups' tab is active, showing a 'Group List' table. The table has columns for 'Group Name', 'Group Source', 'Visibility', and 'Users'. The 'wheel' group is selected, indicated by a checked checkbox in the first column. In the top right corner of the table, there are buttons for 'Add New Group', 'Set Visibility', and a 'Delete' icon (a trash can) which is highlighted with a red box.

	Group Name	Group Source	Visibility	Users
<input type="checkbox"/>	public	Internal	Visible	
<input type="checkbox"/>	hive	External	Visible	
<input type="checkbox"/>	cloudera-scm	External	Visible	
<input checked="" type="checkbox"/>	wheel	External	Visible	
<input type="checkbox"/>	https	External	Visible	
<input type="checkbox"/>	superset	External	Visible	
<input type="checkbox"/>	atlas	External	Visible	
<input type="checkbox"/>	hadoop	External	Visible	
<input type="checkbox"/>	ranger	External	Visible	
<input type="checkbox"/>	kudu	External	Visible	

3. Click OK on the confirmation pop-up.

### What to do next

Users in a deleted group will be reassigned to no group. You can edit these users and reassign them to other groups.

### Related Information

[Edit a user](#)

## Add a role through Ranger

How to add a role in Ranger.


### About this task

You can create a role either through Ranger, or through Hive.

### Procedure

To create a role through Ranger:

1. Select Settings > Users/Groups/Roles, then click the Roles tab.  
The Role List page appears.

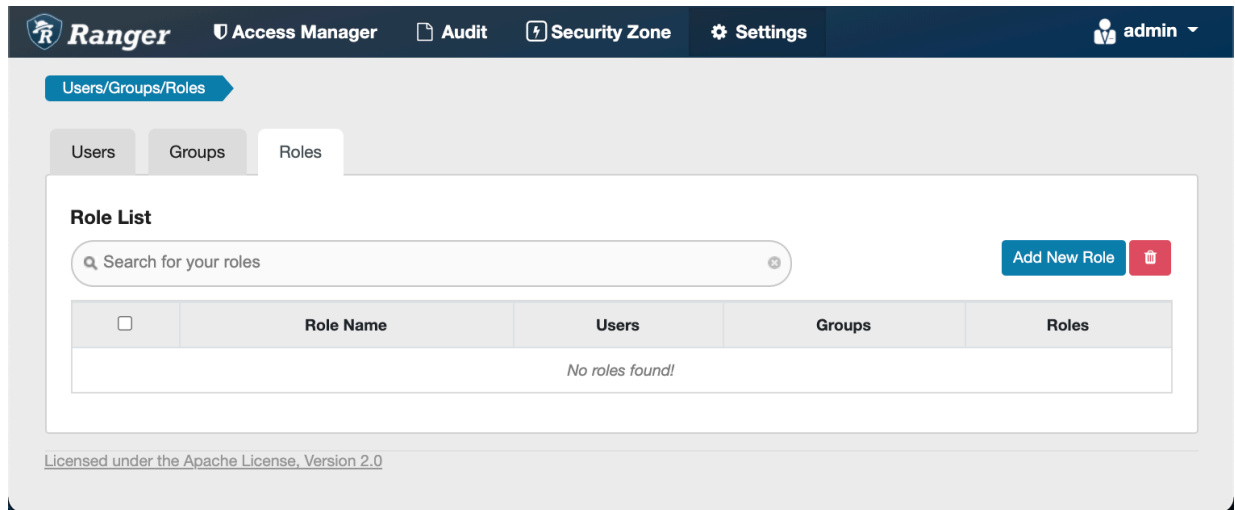

- Click Add New Role.  
The Role Detail page appears.

**Role Detail**

Role Name \*

Description

**Users:**

User Name	Is Role Admin	Action
No users found		

Select User

**Groups:**

Group Name	Is Role Admin	Action
No groups found		

Select Group

**Roles:**

Role Name	Is Role Admin	Action
No roles found		

Select Role

- Enter a unique name for the role. Optionally, add users, groups and/or roles to be associated with the role, then click Save.

## Add a role through Hive

How to add a role in Hive.

### About this task

You can create a role either through Ranger, or through Hive.

### Before you begin

To add a role through Hive, the user must have Admin\_Role privilege in Ranger.

### Procedure

To grant the Admin\_Role privilege, in Ranger:

1. Select Settings > Users/Groups/Roles, then click the Users tab.
2. Click the user name to which you want the Admin\_Role privilege granted.  
The User Edit page appears.

The screenshot shows the Ranger web interface. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', 'Settings', and a user profile 'admin'. Below the navigation bar, there are two tabs: 'Users/Groups/Roles' and 'User Edit'. The 'User Edit' tab is active. The form contains the following fields:

- User Name \***: A text input field containing 'hr\_admin'.
- First Name**: An empty text input field.
- Last Name**: An empty text input field.
- Email Address**: An empty text input field.
- Select Role \***: A dropdown menu with 'Admin' selected.
- Group**: A text input field containing 'hr\_admin'.

At the bottom of the form, there are two buttons: 'Save' (in blue) and 'Cancel' (in white).

3. From the Select Role list, select Admin, then click Save.

In Hive:

4. Log in as a user with Admin\_Role privilege.

5. Type the following command:

```
CREATE ROLE external_hr_role_01;
```

Any user with Is\_Role\_Admin privilege has the ability to assign the role to other users in Hive.

For example, to grant this new role to the user hr\_user01, type:

```
GRANT ROLE external_hr_role_01 TO USER hr_user01;
```

hr\_user01 appears in Ranger having the external\_hr\_role\_01 role.

You can also grant Is\_Role\_Admin privilege to a specific user by typing:

```
GRANT ROLE external_hr_role_01 TO USER hr_user02 WITH ADMIN OPTION;
```

The role you create appears in Ranger and is recognized by Hive. The user that creates the role adds automatically to the list of users having that role. The added user has the Is\_Role\_Admin privilege, as shown in Ranger:

**Role Detail**

Role Name \*

Description

**Users:**

User Name	Is Role Admin	Action
hr_admin	<input checked="" type="checkbox"/>	

## Edit a role

How to edit a role in Ranger.

### Procedure

1. Select Settings > Users/Groups/Roles.



- Click the Roles tab.

The Users/Groups/Roles page opens to the Roles tab.

The screenshot shows the Ranger web interface. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The user 'admin' is logged in. The breadcrumb 'Users/Groups/Roles' is shown, with 'Roles' selected. Below the breadcrumb are tabs for 'Users', 'Groups', and 'Roles'. The 'Role List' section contains a search bar and an 'Add New Role' button. A table lists roles:

<input type="checkbox"/>	Role Name	Users	Groups	Roles
<input type="checkbox"/>	internal_hr_role_01	hr_admin	--	--
<input type="checkbox"/>	external_hr_role_01	hr_admin	--	--

- Click the role name to edit.

The selected role opens for editing in Role Detail.

The screenshot shows the 'Role Detail' page for editing the role 'external\_hr\_role\_01'. The breadcrumb is 'Users/Groups/Roles > Role Edit'. The 'Role Name' field is populated with 'external\_hr\_role\_01'. The 'Description' field is empty. Below are sections for 'Users', 'Groups', and 'Roles'.

**Users:**

User Name	Is Role Admin	Action
hr_admin	<input checked="" type="checkbox"/>	<input type="button" value="X"/>

Select User

**Groups:**

Group Name	Is Role Admin	Action
No groups found		

Select Group

**Roles:**

Role Name	Is Role Admin	Action
No roles found		

Select Role

At the bottom are 'Save' and 'Cancel' buttons.

4. Add users, groups and roles to the existing role, then click Save.

If the role was created in Hive, you can add other users in Hive using the GRANT command:


```
GRANT ROLE external_hr_role_01 TO USER hr_user02;
```

## Delete a role

How to delete a role in Ranger.

### Procedure

1. Select Settings > Users/Groups/Roles.
2. Click the Roles tab.  
The Users/Groups/Roles page opens to the Roles tab.

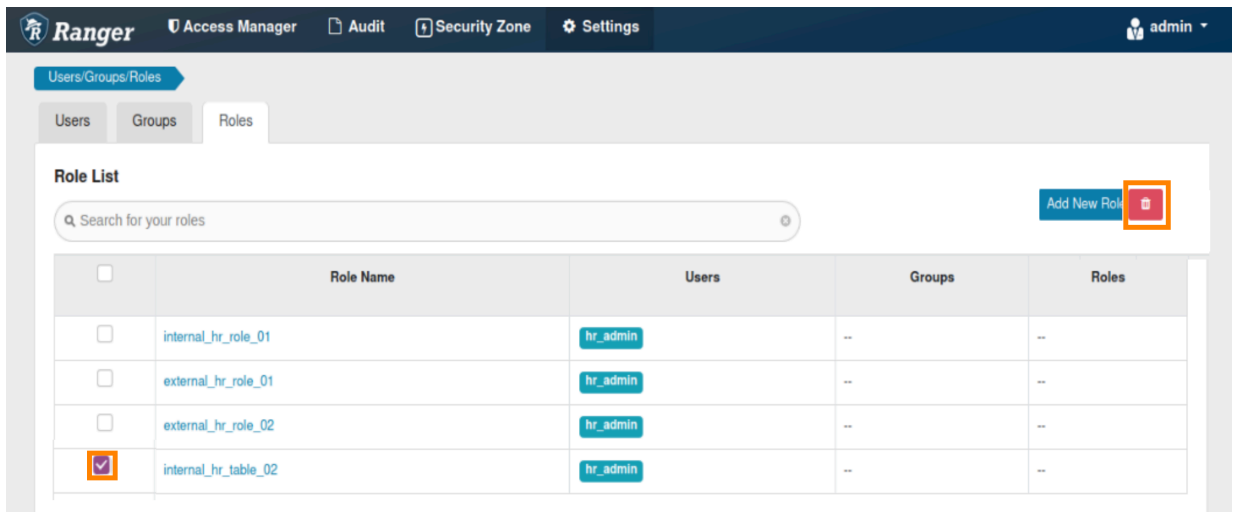

3. Click the checkbox for the role you want to delete, then select the Trash icon.
4. After deleting any roles, click Save .  
If the role was created in Hive, you can delete the role through Hive using the Drop command:


```
DROP ROLE internal_hr_role_02;
```


## Add or edit permissions


How to add or edit user or group permissions in Ranger.

## Procedure

1. Select Settings > Permissions.  
The Permissions page appears.

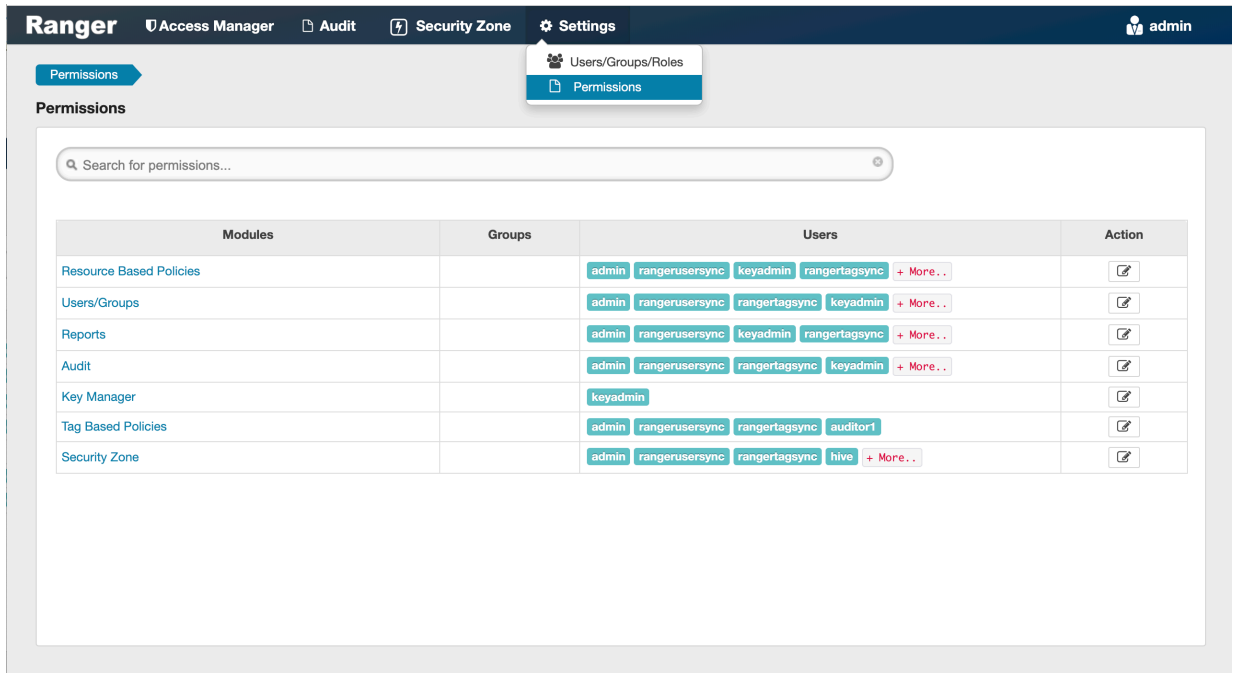

2. Click the Edit icon () for the permission you would like to edit.  
The Edit Permission page appears.

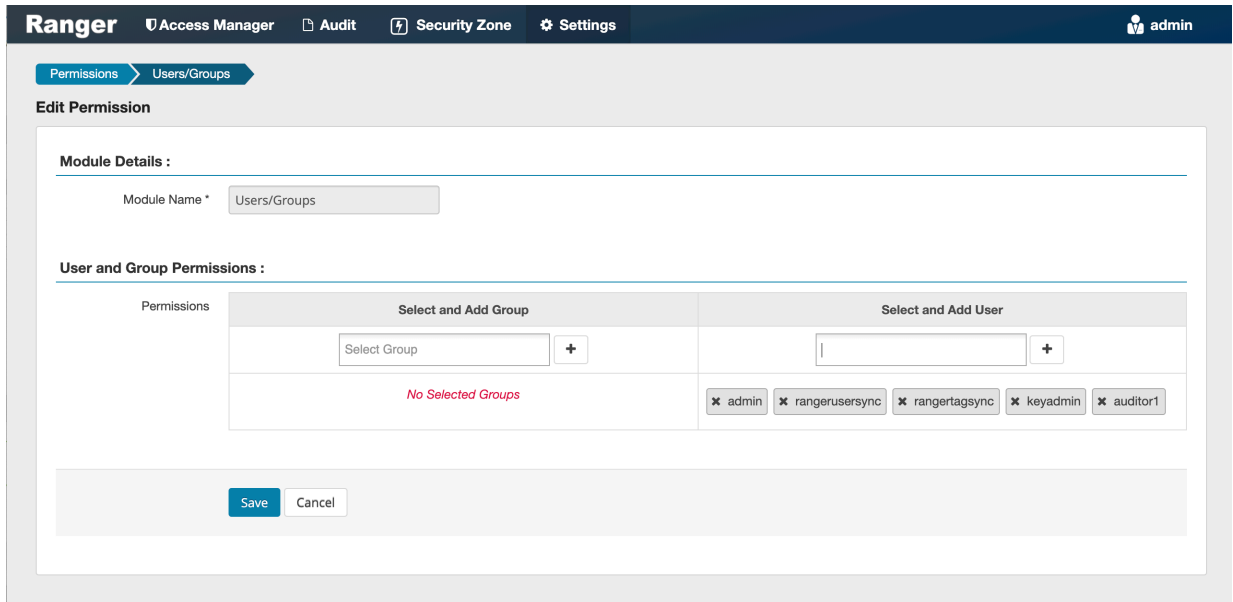

3. Edit the permission settings, then click Save.  
You can select multiple users and groups using the + icons.

## Administering Ranger Reports

You can use the Reports page to help manage policies more efficiently as the number of policies increases. This page lists all resource-based and tag-based policies.


The screenshot shows the Ranger Reports page. The top navigation bar includes 'Ranger', 'Access Manager', 'Audit', 'Security Zone', and 'Settings'. The 'Access Manager' dropdown menu is open, showing 'Resource Based Policies', 'Tag Based Policies', and 'Reports'. The 'Reports' page has a 'Search Criteria' section with fields for Policy Name, Policy Type (Access), Component, Resource, Policy Label, Zone Name, and Search By (Group). A 'Search' button is at the bottom of this section. Below the search criteria is an 'HDFS' section with a table of policies.

Policy ID	Policy Name	Policy Labels	Resources	Policy Type	Status	Zone Name	Allow Conditions	Allow Exclude	Deny Conditions	Deny Exclude
1	all - path	--	path:/	Access	Enabled	--	-	+	+	+
Allow Conditions	Groups			Users			Accesses			
	--			hdfs	rangerlookup		read	write	execute	
2	kms-audit-path	--	path:/ranger/audit/kms	Access	Enabled	--	+	+	+	+

## View Ranger reports

How to view reports for Ranger policies.

To view reports for one or more policies, select Access Manager > Reports.

- To view Allow Condition details for each policy, click the  icon in the Allow Conditions column. You can use the same method to view details for other policy conditions (Allow Exclude, Deny Conditions, etc.).
- To edit a policy from the Reports page, click the Policy ID.

**Ranger** Access Manager Audit Security Zone Settings admin

User Access Policies  
Resource Based Policies  
Tag Based Policies  
Reports

Search Criteria

Policy Name: Enter Policy Name Policy Type: Access  
Component: Select Component Resource: Enter Resource Name  
Policy Label: Select Policy Label Zone Name: Select Zone Name  
Search By: Group Select Group  
Q Search

Export

**HDFS**

Policy ID	Policy Name	Policy Labels	Resources	Policy Type	Status	Zone Name	Allow Conditions	Allow Exclude	Deny Conditions	Deny Exclude
1	all - path	--	path:/*	Access	Enabled	--	-	+	+	+
Allow Conditions	Groups			Users			Accesses			
	--			hdfs	rangerlookup		read	write	execute	
2	kms-audit-path	--	path:/ranger/audit/kms	Access	Enabled	--	+	+	+	+

## Search Ranger reports

Reference information for searching Ranger reports on one or more policies.

You can search based on:

- Policy Name – The policy name.
- Policy Type – The policy type (Access, Masking, or Row Level Filter).
- Policy Label – The policy label.
- Component – The policy resource or tag component.
- Resource – The resource path used when creating the policy.
- Zone Name – The security zone name.
- Group, Username – The group or user name assigned to the policy.

**Ranger** Access Manager Audit Security Zone Settings admin

User Access Policies  
Resource Based Policies  
Tag Based Policies  
Reports

**Reports**

Search Criteria

Policy Name: Enter Policy Name Policy Type: Access

Component: Select Component Resource: Enter Resource Name

Policy Label: Select Policy Label Zone Name: Select Zone Name

Search By: Group Select Group

Q Search

Export

**HDFS**

Policy ID	Policy Name	Policy Labels	Resources	Policy Type	Status	Zone Name	Allow Conditions	Allow Exclude	Deny Conditions	Deny Exclude
1	all - path	--	path:/	Access	Enabled	--	-	+	+	+
Allow Conditions	Groups			Users			Accesses			
	--			hdfs	rangerlookup		read	write	execute	
2	kms-audit-path	--	path:/ranger/audit/kms	Access	Enabled	--	+	+	+	+

## Export Ranger reports

Reference information for exporting Ranger reports on one or more policies.

You can export a list of reports in three file formats:

- CSV file
- Excel file
- JSON

**Ranger** Access Manager Audit Security Zone Settings admin

User Access Report

Reports

Search Criteria

Policy Name: Enter Policy Name Policy Type: Access

Component: Select Component Resource: Enter Resource Name

Policy Label: Select Policy Label Zone Name: Select Zone Name

Search By: Group Select Group

Q Search

**HDFS**

Policy ID	Policy Name	Policy Labels	Resources	Policy Type	Status	Zone Name	Allow Conditions	Allow Exclude	Deny Conditions	Deny Exclude
1	all - path	--	path/*	Access	Enabled	--	+	+	+	+
2	kms-audit-path	--	path/ranger/audit/kms	Access	Enabled	--	+	+	+	+

Export

- Excel file
- CSV file
- JSON file

### Related Information

[Export tag-based policies](#)

[Export resource-based policies for a specific service](#)

[Export all resource-based policies for all services](#)

## Using Ranger client libraries

Ranger now supports clients written in java and python which enable applications to access Ranger REST APIs programmatically. Using client library code simplifies access using java or python, compared with making direct HTTP requests to Ranger REST APIs.

### Summary

Ranger client libraries:

- Provide idiomatic, hand-written code in Java and Python, making Ranger REST APIs simple and intuitive to use.
- Handle all low-level details of communication with the server including complexities involved in JSON parsing.
- Support installing the python client using the familiar package management tool pip.

**Table 68: Ranger Client Installation Repo and Library Reference Links**

Language	Installation	Library Reference
java	<a href="#">github source repository</a>	<a href="#">java library reference</a>
python	<a href="#">github source repository</a>	<a href="#">python library reference</a>

### Authentication

The Apache Ranger release 2.2 client supports two authentication types:

- Basic authentication (username/password)
- Kerberos authentication

Java client prompts for the authentication mode to be used at runtime. For Kerberos-based authentications, a principal and keytab file path is required.

## SSL

Java and Python clients support SSL/TLS-enabled ranger. To connect to HTTPS ranger using java client, provide the path to the SSL configuration file, as shown in this example:

```
$ ./run-sample-client.sh -n <ranger_admin_url>
SSL Configuration File: /path/to/config.xml
```

Sample SSL configuration file which requires values to be populated:

```
<configuration>
  <property>
    <name>xasecure.policymgr.clientssl.truststore</name>
    <value></value>
  </property>
  <property>
    <name>xasecure.policymgr.clientssl.truststore.credential.file</name>
    <value></value>
  </property>
  <property>
    <name>xasecure.policymgr.clientssl.truststore.type</name>
    <value></value>
  </property>
</configuration>
```

## Environment variables

The Java client requires that you initialize the following environment variables:

```
$ export JAVA_HOME=/usr/java/<jdk_version>/bin
$ export PATH=$PATH:$JAVA_HOME
$ export HADOOP_CREDSTORE_PASSWORD=<hadoop_credstore_password>
```

# Using session cookies to validate Ranger policies

Apache Ranger REST Client uses cookie sessions to download policies, tags and roles from Ranger Admin.

In earlier versions, each Ranger plugin used a kerberos login to request a ticket granting ticket (TGT) from the KDC/AD server in order to download policies, tags and roles. This caused high traffic levels when multiple Ranger plugins requested downloads.

Ranger Admin now supports cookie-based sessions. The flag used to enable cookie sessions, `ranger.plugin.<service-name>.policy.rest.client.cookie.enabled`, where `<service-name>` is the name of the service for which a Ranger plugin is enabled, such as `hive`, `solr`, or `kafka`, is set to "enabled" by default.

To check whether the cookie session is used, open the Ranger Admin `access.log` in the `/var/log/ranger/admin` folder. Any policy, tag, or role download call to Ranger Admin displays either a 200 or 304 value as response status. A 401 value for response status indicates the call to the KDC server for a TGT for authentication at service start or when the session cookie expires.